



---

## SARAL/AltiKa Products Handbook

---

---

References:

CNES : SALP-MU-M-OP-15984-CN  
ISRO: xxx

Issue: 2 rev 4

Date: December 9, 2013

---





**Chronology Issues:**


Issue:	Date:	Reason for change:
1rev0	March 9, 2011	Initial Issue
1rev1	November 9, 2011	Taking into account the Change Request SALP-FT-8343: <ul style="list-style-type: none"> <li>- New tidal model: GOT4.8</li> <li>- New Mean Sea Surface: MSS_CNES-CLS11</li> <li>- New Mean Dynamic Topography : MDT_CNES-CLS09</li> <li>- Trailing edge variation flag used instead of rain flag</li> <li>- Disclaimer about altimeter wind speed, sigma-0 values and ice flag at the beginning of the mission</li> <li>- Introduction of the NetCDF extension (.nc) on all SARAL/AltiKa level 2 products</li> <li>- "alt_echo_type" flag removed</li> </ul>
1rev2	December 12, 2011	<ul style="list-style-type: none"> <li>- Precision of the producing agency in the name of the product, update of global attributes (documentation update only).</li> <li>- Update of GDR-D orbit table.</li> <li>- Modification of the signification of the trailing edge variation flag (SALP-FT-8343rev2).</li> </ul>
2rev0	January 7, 2013	<ul style="list-style-type: none"> <li>- New version of the SARAL/AltiKa Product handbook before launch (SALP-FT-8775):               <ul style="list-style-type: none"> <li>o Information about OGDR-BUFR files produced at EUMETSAT.</li> <li>o Update of the table "Differences between Auxiliary Data for O/I/GDR Products".</li> <li>o Update of the error budget table.</li> <li>o Minor text modifications.</li> </ul> </li> </ul>
2rev1	March 14, 2013	<ul style="list-style-type: none"> <li>- Disclaimers and precisions for several parameters for the beginning of the mission (SAFLP-FT-8969). Editing criteria revised.</li> <li>- Specific color (green) chosen to highlight warnings and disclaimers.</li> <li>- Launch date and first information (cycle 0/1) completed.</li> </ul>
2rev2	June 18, 2013	<ul style="list-style-type: none"> <li>- New version of the SARAL/AltiKa Product handbook before public dissemination of O/IGDRs (SALP-FT-9122):               <ul style="list-style-type: none"> <li>o New OGDR directories added for AVISO dissemination. Update of the ftp link to download the SARAL products.</li> <li>o Update of error budget table (SWH specification)</li> </ul> </li> </ul>
2rev3	July 19, 2013	<ul style="list-style-type: none"> <li>- First evolutions of SARAL/AltiKa products after launch (SALP-FT-9060)               <ul style="list-style-type: none"> <li>o Modeled instrumental errors corrections for range, sig0 and swh are given by Look-Up-Tables updated with real measurements instead of ground measurements.</li> <li>o Threshold added on MQE to create 1Hz from 40Hz measurements.</li> <li>o Atmospheric attenuation is given by radiometer measurements instead of 0.</li> </ul> </li> </ul>



**Chronology Issues:**

Issue:	Date:	Reason for change:
		<ul style="list-style-type: none"> <li>o Calibrations are averaged over a 7 days window for the low pass filter and 3 days for the internal path delay and total power.</li> <li>o A first linear relation has been computed between the measured brightness temperatures and the simulated one. This linear relation will be applied on the 23.8 GHz only before neural network (retrieval algorithm for wet tropospheric correction).</li> <li>- Document updates:               <ul style="list-style-type: none"> <li>o Update of mass value (405kg)</li> <li>o Utpdate of table 1: Precision about GIM ionospheric correction (predicted for OGDR and restituted for I/GDR).</li> <li>o Modification of verb tense (past instead of future)</li> <li>o Correction of OGDR-BUFR filename</li> <li>o Removal of EUMETSAT document reference</li> <li>o Note on the SARAL orbit (not exactly on ENVISAT repetitive ground track at the beginning of the mission)</li> <li>o Note on rad_liquid_water parameter that is not reliable as an anomaly has been noticed in the neural network.</li> </ul> </li> </ul>
2rev4	December 9, 2013	<ul style="list-style-type: none"> <li>- Modification of the ecmwf_meteo_map_avail flag meaning and comment (SALP-FT-8904).</li> <li>- 2nd phase of evolutions after launch (SALP-FT-9207)               <ul style="list-style-type: none"> <li>o New tables implemented for wind speed and sea state bias. Impact on wind_speed_alt and sea_state_bias parameters.</li> <li>o New tide model taken into account (FES2012 instead of FES2004).</li> </ul> </li> <li>- AVISO+ new website address.</li> </ul>

**People involved in this issue:**

Written by (*): E. BRONNER A. GUILLOT N. PICOT	CNES	Date  09/12/2013 p.o. 
---	------	--

**Index Sheet :**

Context:	
Keywords:	
Hyperlink:	



## List of tables and figures

### List of tables:

<b>Table 1</b> : Differences between Auxiliary Data for O/I/GDR Products	<b>1</b>
<b>Table 2.</b> Summary of operational, interim, and final geophysical data record products (O/I/GDR) from the SARAL/AltiKa mission.	<b>2</b>
<b>Table 3.</b> Preliminary AltiKa Data Products error budget	<b>12</b>
<b>Table 4.</b> SARAL/AltiKa noise figures measured in orbit	<b>12</b>
<b>Table 6.</b> Main features of the SARAL/AltiKa satellite	<b>15</b>
<b>Table 7.</b> Mean classical orbit elements	<b>21</b>
<b>Table 9.</b> Equator Crossing Longitudes (in order of Pass Number)	<b>26</b>
<b>Table 11</b> : Models and standards	<b>39</b>
<b>Table 11</b> : GDR-C/GDR-D orbit standard	<b>41</b>
<b>Table 13</b> : MSS_CNES-CLS11 model characteristics	<b>42</b>
<b>Table 14</b> : MDT_CNES-CLS09 model characteristics	<b>43</b>
<b>Table 15</b> : Recommended editing criteria	<b>47</b>
<b>Table 16</b> : Recommended filtering criteria	<b>47</b>
<b>Table 17</b> : Main characteristics of (O)(I)GDR products	<b>61</b>
<b>Table 18</b> - Dimensions used in the SARAL/AltiKa data sets	<b>63</b>
<b>Table 19</b> - netCDF variable type	<b>63</b>
<b>Table 20</b> - Variable's attributes	<b>64</b>

### List of figures:

<b>Figure 1</b> : Altimetric distances - Altitude, Range and Height	<b>5</b>
<b>Figure 2.</b> Geometry of the sea surface height measurement by altimetry	<b>13</b>
<b>Figure 3</b> : AltiKa & Argos-3 payloads accommodation on SSB platform : SARAL satellite.	<b>15</b>
<b>Figure 5</b> : SARAL/AltiKa radiometer Instrument and antenna (shared with altimeter)	<b>16</b>
<b>Figure 6</b> : SARAL/AltiKa DORIS Receiver Antenna and Instrument	<b>17</b>
<b>Figure 7</b> : SARAL/AltiKa Laser Reflector Array	<b>17</b>
<b>Figure 8</b> : Applications of the ARGOS system	<b>18</b>
<b>Figure 9</b> : SARAL UHF antenna	<b>19</b>
<b>Figure 10</b> : SARAL ARGOS-3 reception instrument	<b>19</b>
<b>Figure 11</b> : ENVISAT and SARAL/AltiKa ground track coverage every 35 days (ascending and descending passes)	<b>20</b>
<b>Figure 15</b> : EGM96 geoid	<b>44</b>



---

## Applicable documents / reference documents

- AD 1 :** SARAL/AltiKa System Requirements  
**SRL-SYS-SP-010-CNES**
- AD 2 :** ISRO-CNES AltiKa Joint Science Plan  
**SRL-SYS-PL-392-CNES**
- AD 3 :** Algorithm Theoretical Baseline Definition: Altimeter Level 1b Processing  
**SALP-ST-M2-EA-15884-CN**
- AD 4 :** Algorithm Theoretical Baseline Definition: Radiometer Level 1b Processing  
**SALP-ST-M2-EA-15885-CN**
- AD 5 :** Algorithm Theoretical Baseline Definition: Altimeter Level 2 Processing  
**SALP-ST-M2-EA-15886-CN**
  
- RD 1 :** OSTM/Jason-2 Products Handbook  
**SALP-MU-M-OP-15815-CN**
- RD 2 :** SARAL/AltiKa CalVal Plan  
**ALK-SY1-PL-198-CNES**
- RD 3 :** SALP Products Specification - Volume 20 : AltiKa / SARAL User Products  
**SALP-ST-M-EA-15839-CN**



**Contents**

- 1. Introduction ..... 1**
  - 1.1. Overview of the SARAL/AltiKa product family ..... 1**
    - 1.1.1. Product contents ..... 1
    - 1.1.2. Filename conventions ..... 2
  - 1.2. Handbook Overview..... 4**
  - 1.3. Document reference and contributors ..... 4**
  - 1.4. Conventions..... 4**
    - 1.4.1. Vocabulary ..... 4
      - 1.4.1.1. Altimetric distances ..... 4
      - 1.4.1.2. Orbits, Revolutions, Passes, and Repeat Cycles..... 5
      - 1.4.1.3. Reference Ellipsoid ..... 5
    - 1.4.2. Correction Conventions ..... 6
    - 1.4.3. Time Convention..... 6
    - 1.4.4. Unit Convention..... 6
    - 1.4.5. Flagging and Editing..... 6
- 2. SARAL/AltiKa Mission Overview..... 7**
  - 2.1. Altimetric background ..... 7**
  - 2.2. Introduction to SARAL/AltiKa mission ..... 7**
    - 2.2.1. Mission overview ..... 7
    - 2.2.2. Mission objectives ..... 8
  - 2.3. SARAL/AltiKa Mission..... 9**
  - 2.4. SARAL/AltiKa Requirements ..... 10**
    - 2.4.1. Accuracy of Sea-level Measurements ..... 11
    - 2.4.2. Sampling Strategy..... 12
    - 2.4.3. Tidal Aliases..... 12
    - 2.4.4. Duration and coverage ..... 13
  - 2.5. Mission Description ..... 13**
  - 2.6. Satellite Description ..... 14**
    - 2.6.1. Satellite Characteristics..... 15
    - 2.6.2. Sensors ..... 15
      - 2.6.2.1. AltiKa Altimeter..... 15
      - 2.6.2.2. Dual frequency microwave radiometer ..... 16
      - 2.6.2.3. DORIS System ..... 17
      - 2.6.2.4. Laser Reflector Array (LRA) ..... 17
      - 2.6.2.5. ARGOS-3 Instrument..... 17



---

<b>2.6.3. Orbit</b> .....	<b>19</b>
2.6.3.1. Equator Crossing Longitudes (in order of Pass Number) .....	22
2.6.3.2. Equator Crossing Longitudes (in order of Longitude).....	27
<b>2.6.4. The SARAL/AltiKa Project Phases</b> .....	<b>32</b>
2.6.4.1. The verification phase .....	32
2.6.4.2. The operational (routine and long-term CALVAL activities) .....	32
<b>2.7. Data Processing and Distribution</b> .....	<b>33</b>
2.7.1. Access to NRT data .....	34
2.7.2. Access to off-line data .....	34
2.7.3. Documentation and Sample Reader Software .....	34
<b>2.8. Access to data via ISRO</b> .....	<b>34</b>
2.8.1. Access to NRT data .....	34
2.8.2. Access to off line data .....	35
<b>2.9. Access to data via EUMETSAT</b> .....	<b>35</b>
2.9.1. NRT data access .....	35
2.9.2. Access to archived data .....	36
<b>2.10. Access to data on GTS</b> .....	<b>36</b>
2.10.1.1. GTS access for OGDR-BUFR files .....	36
<b>2.11. CNES data distribution</b> .....	<b>37</b>
2.11.1. Details of off line data access via CNES .....	37
<b>3. Product evolution history</b> .....	<b>37</b>
<b>3.1. Models and Standards History</b> .....	<b>38</b>
<b>3.2. Models and Editing on Version "d" Products</b> .....	<b>40</b>
3.2.1. Orbit models .....	40
3.2.2. Mean Sea Surface .....	42
3.2.3. Mean Dynamic Topography .....	42
3.2.4. Geoid .....	43
3.2.5. Bathymetry.....	44
3.2.6. Ocean Tides .....	44
3.2.6.1. GOT4.8 Ocean Tide Model .....	44
3.2.6.2. FES2012 Ocean Tide Model.....	46
3.2.7. Sea Surface Height Bias Recommendation .....	46
3.2.8. Data Editing Criteria .....	47
<b>4. Using the (O)(I)GDR data</b> .....	<b>48</b>
<b>4.1. Overview</b> .....	<b>48</b>
<b>4.2. Typical computation from altimetry data</b> .....	<b>48</b>
4.2.1. Corrected Altimeter Range .....	48





---

4.2.2. Sea Surface Height and Sea Level Anomaly.....	49
4.2.2.1. Tide Effects.....	50
4.2.2.2. Geophysical Surface - Mean Sea Surface or Geoid.....	50
4.2.3. Mean Sea Surface and Adjustment of the Cross Track Gradient.....	50
4.2.4. Range Compression.....	52
<b>5. Altimetric data.....</b>	<b>53</b>
<b>5.1. Precise Orbits.....</b>	<b>53</b>
<b>5.2. Altimeter Range.....</b>	<b>53</b>
<b>5.3. Geoid.....</b>	<b>53</b>
<b>5.4. Mean Sea Surface.....</b>	<b>54</b>
<b>5.5. Mean Dynamic Topography.....</b>	<b>54</b>
<b>5.6. Geophysical Corrections.....</b>	<b>54</b>
5.6.1. Dry Troposphere.....	54
5.6.2. Wet Troposphere.....	55
5.6.3. Ionosphere.....	55
5.6.4. Ocean Waves (sea state bias).....	56
<b>5.7. Trailing edge variation flag.....</b>	<b>56</b>
5.7.1. Introduction : Rain & Cloud effect on SARAL/AltiKa.....	56
5.7.2. SARAL/AltiKa Trailing edge variation flag.....	57
5.7.3. Limitations.....	57
<b>5.8. Ice Flag.....</b>	<b>57</b>
<b>5.9. Tides.....</b>	<b>58</b>
5.9.1. Geocentric Ocean Tide.....	58
5.9.2. Long period Ocean Tide.....	58
5.9.3. Solid Earth Tide.....	58
5.9.4. Pole Tide.....	59
<b>5.10. Inverse Barometer Effect.....</b>	<b>59</b>
5.10.1. Inverted Barometer Correction.....	59
5.10.2. Barotropic/Baroclinic Response to Atmospheric Forcing.....	60
<b>5.11. Sigma 0.....</b>	<b>60</b>
<b>5.12. Wind Speed.....</b>	<b>60</b>
<b>5.13. Bathymetry Information.....</b>	<b>60</b>
<b>6. Data description.....</b>	<b>61</b>
<b>6.1. Data format.....</b>	<b>62</b>
6.1.1. NetCdf format and CF convention.....	62
6.1.2. The NetCDF Data Model.....	63
6.1.2.1. Dimensions.....	63



---

6.1.2.2. Variables .....	63
6.1.2.3. Coordinate variables and auxiliary coordinate variables .....	63
6.1.2.4. Attributes .....	63
6.1.3. The Common Data Language .....	64
<b>6.2. Global attributes.....</b>	<b>67</b>
<b>6.3. Data Sets .....</b>	<b>69</b>
<b>6.4. Software .....</b>	<b>70</b>
6.4.1. Software provided with netCDF : “ncdump” .....	70
6.4.2. Additional general software.....	70
6.4.2.1. ncbrowse .....	70
6.4.2.2. netCDF Operator (NCO).....	70
6.4.3. Additional specific software : “BRAT” .....	70
<b>6.5. OGDR BUFR product.....</b>	<b>71</b>
<b>Annexe A - References .....</b>	<b>72</b>
<b>Annexe B - List of acronyms .....</b>	<b>74</b>
<b>Annexe C - Contacts.....</b>	<b>76</b>



## 1. Introduction

SARAL/AltiKa is a follow-on mission to ENVISAT ESA's mission and uses the same ground track. The satellite name SARAL stands for SATellite for ARgos and ALtiKa. This mission continues the series of successful altimetric missions such as TOPEX/Poseidon and Jason missions. While they were conducted under a cooperation between the French Space Agency, "Centre National d'Etudes Spatiales" (CNES), the United States National Aeronautics and Space Administration (NASA), the European Organization for the Exploitation of Meteorological Satellites (EUMETSAT) and the National Oceanic and Atmospheric Administration (NOAA), SARAL/AltiKa is a new collaboration between CNES and ISRO (Indian Space Research Organization).

### 1.1. Overview of the SARAL/AltiKa product family

The purpose of this document is to assist users of the SARAL/AltiKa products (Operational Geophysical Data Record : OGDR, Interim Geophysical Data Record : IGDR, and Geophysical Data Record : GDR) by providing a comprehensive description of product content and format. We will so refer to (O)(I)GDR in this document when the information is relevant for all the products.

(O)(I)GDR products are identical except for the following differences regarding the auxiliary data used in the processing:

Auxiliary Data	Impacted Parameter	OGDR	IGDR	GDR
Orbit	Satellite altitude, Doppler correction, ...	DORIS Navigator	Preliminary (DORIS MOE)	Precise (DORIS+Laser POE)
Meteo Fields	Dry/wet tropospheric corrections, U/V wind vector, Surface pressure, Inverted barometer correction, ...	Predicted	Restituted	
Pole Location	Pole tide height	Predicted		Restituted
Mog2D	HF ocean dealiasing correction	Not available	Preliminary	Precise
GIM	Ionosphere correction	Predicted	Restituted	

Table 1 . Differences between Auxiliary Data for O/I/GDR Products

GDR products, unlike OGDR and IGDR products, are fully validated products.

#### 1.1.1. Product contents

The Level-2 products from this mission comprise a family of nine different types of geophysical data records (GDRs). As illustrated in Table 2, there are three families of GDRs, distinguished by increasing latency and accuracy, going from the Operational GDR (OGDR), to the Interim GDR (IGDR), to the final GDR. Within each of these three families there are up to three types of files in NetCDF format (one in BUFR Format), with increasing size and complexity:

1. a reduced 1 Hz subset of the full dataset in NetCDF format (O/I/GDR-SSHA);
2. the native NetCDF formatted datasets (O/I/GDRs) which contain 1Hz records as well as 40 Hz high-rate values; the OGDRs given in BUFR format contain only 1Hz records.
3. an expert sensor product containing the full radar-echo waveforms in NetCDF format (S-IGDR/S-GDR, not applicable to the OGDR).

For the OGDR family, a specific product in BUFR format containing exclusively 1 Hz data is available, designed to cover the needs of the operational community for near real time



observations in World Meteorological Organisation (WMO) standardised formats for assimilation in Numerical Weather Prediction (NWP) models.

### SARAL/AltiKa Level-2 Products

	OGDR family	IGDR family	GDR family	<b>Size &amp; Complexity</b> 
<b>Reduced 1Hz</b>	OGDR-SSHA	IGDR-SSHA	GDR-SSHA	
<b>1Hz + 40Hz</b>	OGDR OGDR-BUFR*	IGDR	GDR	
<b>1Hz + 40Hz +waveforms</b>	-	S-IGDR	S-GDR	
<b>Latency</b>	3 - 5 Hours	< 1.5 days	~ 40 days	

**Latency & Accuracy**

\* All files in NetCDF format except OGDR-BUFR, which contains no 40 Hz data

**Table 2.** Summary of operational, interim, and final geophysical data record products (O/I/GDR) from the SARAL/AltiKa mission.

All nine files contain sea surface height, ocean surface wind speed, significant wave height information and all required corrections. The NetCDF files differ in the amount and type of auxiliary data included but the product format is the same.

#### 1.1.2. Filename conventions

The product names are based on the following convention:

SRL\_<O/I/G>P<N/R/S>\_2P<v><S/P><ccc>\_<pppp>\_<yyyymmdd\_hhnnss>\_<yyyymmdd\_hhnnss>.aaaa.nc

- With :
- <O/I/G> : product family (O : OGDR, I : IGDR, G: GDR)
  - <N/R/S> : product type (N : native, R: reduced, S : sensor)
  - <v> : product version (set to 'T' during CalVal phases, then set to the current altimetric version from data standards)
  - <S/P> : product duration (S : segment for OGDR, P : pass for I/GDR)
  - <ccc>: cycle number of 1<sup>st</sup> product record
  - <pppp> : pass number of 1<sup>st</sup> product record (1-1002)
  - <yyyymmdd\_hhnnss> : date of 1<sup>st</sup> product record
  - <yyyymmdd\_hhnnss> : date of last product record
  - <aaaa> : Name of the agency producing the data (EUM/CNES/ISRO)

So for the OGDR we have:

OGDR: SRL\_OPN\_2PvSccc\_pppp\_yyyymmdd\_hhnnss\_yyyymmdd\_hhnnss.aaaa.nc



---

OGDR-SSHA: SRL\_OPR\_2PvSccc\_pppp\_yyyymmdd\_hhnnss\_yyyymmdd\_hhnnss.aaaa.nc

for the OGDR-BUFR, the filename is not relevant if you are accessing the files via GTS (see below for details on access to NRT data). Otherwise, if you are accessing the files from the archives (UMARF) or EUMETCast, the filenames of the OGDR-BUFR are at the EUMETSAT/UMARF and on EUMETCast:

W\_XX-EUMETSAT-  
Darmstadt,SURFACE+SATELLITE,SARAL+OGDR\_C\_EUMS\_yyyymmddhhnnss\_v\_ccc\_ppp  
p\_yyyymmddhhnnss.bin

for the IGDR:

IGDR: SRL\_IPN\_2PvPccc\_pppp\_yyyymmdd\_hhnnss\_yyyymmdd\_hhnnss.aaaa.nc  
IGDR-SSHA: SRL\_IPR\_2PvPccc\_pppp\_yyyymmdd\_hhnnss\_yyyymmdd\_hhnnss.aaaa.nc  
S-IGDR: SRL\_IPS\_2PvPccc\_pppp\_yyyymmdd\_hhnnss\_yyyymmdd\_hhnnss.aaaa.nc

and for the GDR:

GDR: SRL\_GPN\_2PvPccc\_pppp\_yyyymmdd\_hhnnss\_yyyymmdd\_hhnnss.aaaa.nc  
GDR-SSHA: SRL\_GPR\_2PvPccc\_pppp\_yyyymmdd\_hhnnss\_yyyymmdd\_hhnnss.aaaa.nc  
S-GDR: SRL\_GPS\_2PvPccc\_pppp\_yyyymmdd\_hhnnss\_yyyymmdd\_hhnnss.aaaa.nc



---

## 1.2. Handbook Overview

---

This is a combination of a guide to data use and a reference handbook, so not all sections will be needed by all readers.

**Section 1** provides information on product evolution history

**Section 2** provides background information about the (O)(I)GDR and this document

**Section 3** is an overview of the SARAL/AltiKa mission

**Section 4** is an introduction to using the SARAL/AltiKa data

**Section 5** is an introduction to the SARAL/AltiKa altimeter algorithms

**Section 6** provides a description of the content and format of the SARAL/AltiKa (O)(I)GDRs

**Appendix A** contains references

**Appendix B** contains acronyms

**Appendix C** describes how to order information or data from CNES, EUMETSAT and ISRO, and lists related Web sites.

---

## 1.3. Document reference and contributors

---

When referencing this document, please use the following citation:

“SARAL/AltiKa Products Handbook”,

<b>CNES :</b>	<b>SALP-MU-M-OP-15984-CN</b>
<b>ISRO :</b>	<b>TBD</b>

Main authors of this document are: E. BRONNER from CNES.

As parts of this handbook are heritage from Jason-1/2 handbook and SARAL/AltiKa Calval Plan, other contributors include:

- Ashok K. SHUKLA from ISRO,
- N. PICOT and A. GUILLOT from CNES,
- J.P. DUMONT and V. ROSMORDUC from CLS,
- J. LILLIBRIDGE from NOAA,
- S. DESAI from NASA/JPL,
- H. BONEKAMP, R. SCHARROO and J. FIGA from EUMETSAT.

---

## 1.4. Conventions

---

### 1.4.1. Vocabulary


#### 1.4.1.1. Altimetric distances

In order to reduce confusion in discussing altimeter measurements and corrections, the following terms are used in this document as defined below:

- **Distance** and **Length** are general terms with no special meaning in this document
- **Range** is the distance from the satellite to the surface of the Earth, as measured by the altimeter. Thus, the altimeter measurement is referred to as "range" or "altimeter range," not height



- **Altitude** is the distance of the satellite or altimeter above a reference point. The reference point used is the reference ellipsoid. This distance is computed from the satellite ephemeris data
- **Height** is the distance of the sea surface above the reference ellipsoid. The sea surface height is the difference of the altimeter range from the satellite altitude above the reference ellipsoid

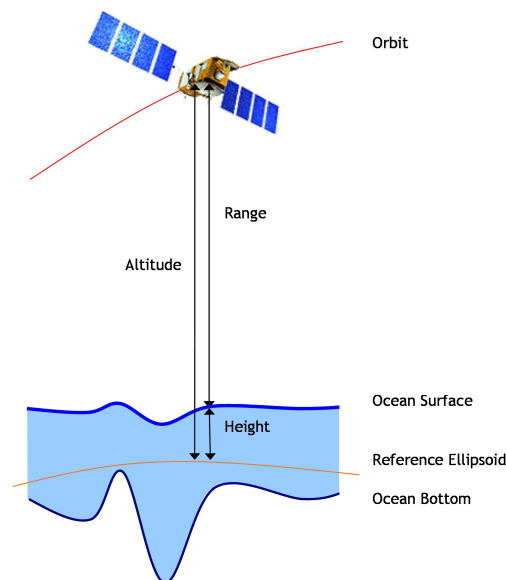

**Figure 1 : Altimetric distances - Altitude, Range and Height**

## 1.4.1.2. Orbits, Revolutions, Passes, and Repeat Cycles

An **Orbit** is one circuit of the earth by the satellite as measured from one ascending node crossing to the next. An ascending node occurs when the sub satellite point crosses the earth's equator going from south to north. A **Revolution (REV)** is synonymous with orbit.

The OGDR data is organized into files ("segments") which corresponds to the amount of data dumped over an Earth terminal (typically 2 hour-data sets).

The (I)GDR data is organized into pass files in order to avoid having data boundaries in the middle of the oceans, as would happen if the data were organized by orbit. A **Pass** is half a revolution of the earth by the satellite from extreme latitude to the opposite extreme latitude.

For SARAL/AltiKa, an **Ascending Pass** begins at the latitude -81.49 deg and ends at +81.49 deg. A **Descending Pass** is the opposite (+81.49 deg to -81.49 deg). The passes are numbered from 1 to 1002 representing a full repeat cycle of the SARAL/AltiKa ground track. Ascending passes are odd numbered and descending passes are even numbered.

After one **repeat cycle** of 501 orbits, SARAL/AltiKa revisits the same ground-track within a margin of  $\pm 1$  km. That means that every location along the SARAL/AltiKa ground-track is measured every approximately 35 days.

## 1.4.1.3. Reference Ellipsoid

The **Reference Ellipsoid** is the first-order definition of the non-spherical shape of the Earth as an ellipsoid of revolution with equatorial radius of 6378.1363 kilometers and a flattening coefficient of 1/298.257 (same reference ellipsoid as used by the Jason-1, Jason-2 and the T/P missions).



---

## 1.4.2. Correction Conventions

All environmental and instrument corrections are computed so that they should be added to the quantity which they correct. That is, a correction is applied to a measured value by

$$\text{Corrected Quantity} = \text{Measured Value} + \text{Correction}$$

This means that a correction to the altimeter range for an effect that lengthens the apparent signal path (e.g., wet troposphere correction) is computed as a negative number. Adding this negative number to the uncorrected (measured) range reduces the range from its original value toward the correct value. Example: Corrected Range = Measured Range + Range Correction.

## 1.4.3. Time Convention

Times are UTC and referenced to **January 1, 2000 00:00:00.00**.

A UTC leap second can occur on June 30 or December 31 of any year. The leap second is a sixty-first second introduced in the last minute of the day. Thus the UTC values (minutes:seconds) appear as: 59:58 ; 59:59 ; 59:60 ; 00:00 ; 00:01.

## 1.4.4. Unit Convention

All distances and distance corrections are reported in tenths of millimeters ( $10^{-1}$  mm).

## 1.4.5. Flagging and Editing

In general, flagging consists of three parts: instrument flags (on/off), telemetry flags (preliminary flagging and editing) and data quality flags (geophysical processing flags).

Instrument flags provide information about the state of the various instruments on the satellite.

Telemetry flags are first based on instrument modes and checking of telemetry data quality. Only severely corrupted data are not processed (i.e. data that cannot be correctly read on ground). Flag setting is designed to get a maximum amount of data into the "Sensor Data Records" (part of the SGDR data sets). Science data are processed only when the altimeter is in tracking mode.

Quality flags are determined from various statistical checks on the residuals after smoothing or fitting through the data themselves. These flags are set if gaps in the data are detected, or residuals have exceeded predetermined thresholds, or if the gradients of the data exceed predetermined thresholds.

**N.B.:** Please note that, at the beginning of the mission, all quality flags given in the products (and state\_flags such as orb\_state\_flag\_diode) may not be very relevant (Jason-2 heritage, not enough data to tune flags thresholds, etc.). We need to have a complete overview and tuning of all flags to provide better information to users.





---

## 2. SARAL/AltiKa Mission Overview

### 2.1. Altimetric background

Three previous high-accuracy altimetric missions, TOPEX/POSEIDON (T/P, launched in August 1992 and which last until October 2005), Jason-1 (launched in December 2001 and which last until June 2013) and Jason-2 (launched in June 2008) have been the key elements of a major turning point in physical oceanography, in terms of both scientific research and applications. Exceeding most initial specifications in terms of accuracy, T/P quickly became a unique tool to make significant progress in the understanding and modeling of ocean circulation and consequently on its climatic impact. The success of the T/P mission was mainly due to an appropriate optimization of the system: instruments, satellite, and orbit parameters were all specifically designed to fulfill the objectives of the mission. The T/P follow-on mission, Jason-1, was engaged soon after with the aim to provide the same level of performance, but with a significant decrease in weight and power needs, hence a much lower mission cost. In addition, near-real time applications were included in the main objectives of the mission. Jason-2 presents better tracking performance and continue the success story of altimetric missions.

These missions, individually as well as combined have made essential contributions in other domains, like mean sea level surveys, tides, marine meteorology, geophysics and geodesy. Most notably the tandem mission phase, where Jason-1 and T/P or Jason-1 and Jason-2 were flying on the same orbit separated by only 70 s or 1 min, provided a unique opportunity for intercalibration of both systems, hence improving further the scientific data quality. High accuracy radar altimeter missions are uniquely capable to globally and continuously observe the ocean and to better understand the short to long term changes of ocean circulation. They are now considered as essential components of global ocean observation systems. These systems integrate altimetric and other satellite and in-situ data into models and require the continuity and permanence of ocean measurements to produce time series over several decades.

The near-real time and short term capability of Jason-1, Jason-2 as well as ENVISAT (from ESA, launched in March 2002 and which last until April 2012) have fed several pilot experiments that demonstrated the growing importance of operational ocean observation products and short-range ocean prediction for a variety of applications (ship routing, environmental hazards, support to maritime industries).

Also worth mentioning is the importance of wave and wind data provided by altimeter systems over oceans. This information is routinely used in meteorological and research entities, either for calibration of other data sets, assimilation in weather and wave models, or for statistical analysis.

**N.B.:** Please note that this User Handbook mainly deals with ocean application. Inland water, land ice and sea-ice experts should adapt their editing and processing strategy based on their own experience. Any question could also be sent to [aviso@oceanobs.com](mailto:aviso@oceanobs.com) ([aviso@altimetry.fr](mailto:aviso@altimetry.fr) after Feb.2014).

### 2.2. Introduction to SARAL/AltiKa mission

#### 2.2.1. Mission overview

The SARAL mission results from the common interest of both CNES and ISRO in studying ocean from space using altimetry system and in promoting maximum use of the ARGOS Data Collecting System.

In the present document, we focus on the AltiKa part of the overall SARAL mission.

Radar altimetry by satellite is a technique used in oceanography to measure, globally over the oceans, the sea level needed to understand ocean circulation and its variability. The importance of altimetry data to better understand the ocean circulation and its impact on the climate of the Earth led to the TOPEX/Poseidon and Jason series of satellites complemented by ERS1-2, GFO, ENVISAT and HY-2. With the launch of these missions began a data collection that must continue



well into the century in order to monitor the inter-annual evolution and separate transient phenomena from secular variations.

SARAL/AltiKa mission belongs to the global altimetry system and then participates to the precise and accurate observations of ocean circulation and sea surface elevation for its life time.

Thus it is the aim of AltiKa part of the SARAL mission to provide altimetric measurements designed to study ocean circulation and sea surface elevation with the same accuracy as the one provided by ENVISAT mission and complementary to Jason's mission.

The AltiKa project developed by CNES is based on a Ka-band altimeter (35.75 GHz, 500MHz), 1<sup>st</sup> oceanographic altimeter using such a high frequency. The use of the Ka-band frequency supplies more accurate measurements (improvement of the spatial and vertical resolution) enabling a better observation of ocean meso-scale, ices, coastal areas, continental water bodies as well as the waves height. The drawback of this Ka-band frequency is its sensitivity to rain that can lead to signal attenuation.

The SARAL/AltiKa mission is part of the operational satellite altimetry system, jointly with Jason-2, and enables to ensure the service continuity which is nowadays provided by Jason-2 jointly with HY-2 and Cryosat-2 (even if CryoSat has been designed for land ice and sea-ice monitoring, CNES has demonstrated that Cryosat-2 can be safely used for ocean purposes).

By ensuring the observations continuity and widening the observation areas, CNES answers the wish of the oceanography community by bringing a description:

- for the meso-scale in open ocean,
- in coastal areas,
- for the seasonal forecast,
- for the hydrology,
- for the climate studies.

AltiKa data thus contributes, along with data from others altimetry missions, to the development of operational oceanography, to our climate understanding and to the development of forecasting capabilities through data assimilation methods improvement in coupled ocean-atmosphere coupling models, bio-chemistry models, etc.

## 2.2.2. Mission objectives

SARAL/AltiKa main scientific objective is to provide data products to oceanographic research user community in studies leading to improve our knowledge of the **ocean meso-scale variability**, thanks to the improvement in spatial and vertical resolution brought by SARAL/AltiKa.

Ocean meso-scale variability is defined as a class of high-energy processes, with wave lengths within a 50km to 500km range, and with periods of a few days to one year. Kinetic energy of meso-scale variability is one order of magnitude more than mean circulation's one. Description of meso-scale is thus essential for understanding ocean dynamics, including mean circulation and its climatic effects (through interactions of meso-scale turbulence with the mean flow).

SARAL/AltiKa main scientific objective is divided in sub-themes including:

- intrinsic scientific studies of ocean at meso-scale dynamics: observations, theoretical analyses, modelling, **data assimilation**, parameterization, ...
- improvement of our understanding of the oceanic component in the **climate system**: investigation of local processes at small or medium scale poorly known and understood at present, but which have an impact on the modelling of climate variability at large spatial and temporal scales.
- contribution to the study of **coastal dynamic processes**, especially small or medium scale phenomena, whose retrieval will enable to anticipate many downstream applications.



- contribution to **operational oceanography** which is seeking large amounts of *in situ* and space observation data.

SARAL/AltiKa secondary objectives are notably the monitoring of the main **continental waters level** (lakes, rivers, closed seas), the monitoring of **mean sea level** variations, the observation of **polar oceans**, the analysis and forecast of **wave and wind fields**, the study of **continental ices** (thanks to improved performances of Ka-band) and **sea ices**, the access to **low rains** climatology (enabled in counterpart to the sensitivity of Ka-band to clouds and low rains) and the **marine biogeochemistry** (notably through the role of the meso and sub-meso-scale physics).

Further details on science and applications of SARAL/AltiKa data products can be found in the **ISRO-CNES SARAL/AltiKa Joint Science Plan** document [AD2].

## 2.3. SARAL/AltiKa Mission

The SARAL/AltiKa mission is built on the heritage of T/P and Jason-1/2, with two driving ambitions:

- Ensuring continuity of high quality measurements for ocean science
- Providing operational products for assimilation and forecasting applications

The SARAL mission has been set forth as a cooperation between CNES and ISRO. The sharing of responsibilities between CNES and ISRO, as defined in the SARAL MoU, is as follow :

→ CNES responsibilities :

- Project Management: responsibility shared with ISRO
- Overall SARAL system engineering
- Integrated Payload Module (PIM), including
  - AltiKa mission payload
  - ARGOS-3 mission payload
- Support for SARAL Payload Module integration and test
- Ground System & Operations
  - Polar X-band network stations
  - Compatibility of L-band stations network required for the ARGOS-3/SARAL mission
  - Data communication network
  - AltiKa Mission Centre
  - NRT and OFL product processing software development, installation, training and support to operations (ISRO and EUMETSAT)
  - NRT product processing, archiving, distribution to users outside India, with the support of EUMETSAT
  - OFL product processing and distribution to users outside India
  - DORIS product processing and distribution
  - Data providing to the ARGOS Global Processing Centers
  - Archiving of all telemetry and products, and auxiliary data
- User services



- AltiKa System Coordination with other altimetry missions in the frame of the SALP service ; expertise and long term CALVAL

→ ISRO responsibilities :

- Project Management : responsibility shared with CNES
- SARAL satellite engineering
- SSB Platform
- PSLV Launch vehicle and services
- SSB Platform
- SARAL Satellite integration and test
- Ground System & Operations
  - Satellite Control Centre
  - S-band network stations
  - X-band Hyderabad Shadnagar station (TBCnot necessarily on an operational basis)
  - Data communication network
  - NRT and OFL products processing and distribution to users within India
  - Archiving of all telemetry and products, and auxiliary data
- User services

→ EUMETSAT responsibilities : EUM is the CNES support for processing, archiving and dissemination of near real-time OGDR products to users (except Indian users who are served by MOSDAC).

The SARAL satellite is planned to operate for a nominal period of five (5) years, with an objective at 7 years. However, the operations will be conducted throughout the whole SARAL satellite lifetime.

SARAL/AltiKa was launched on **February 25<sup>th</sup> 2013, at 12:31 GMT by a PSLV vehicle (C20) supplied by ISRO, from the main ISRO launch base, the Satish Dhawan Space Centre, SHAR SRIHARIKOTA, 100 km North from Chennai.** It reached its nearly nominal repetitive orbit on March 13<sup>th</sup> 2013. The start of cycle 0 on occurred on March 13<sup>th</sup> 2013 at 06:36 GMT. The start of cycle 1 occurred on March 14<sup>th</sup> 2013 at 05:39 GMT, the pass 1 began at 06:05 GMT (ascending node #1, long 0.13°, lat 0°).

## 2.4. SARAL/AltiKa Requirements

The major elements of the mission include:

- **An Earth orbiting satellite carrying an altimetric system** for measuring the height of the satellite above the sea surface
- **A precision orbit determination system** for referring the altimetric measurements to geodetic coordinates
- **A data analysis and distribution system** for processing the satellite data, verifying their accuracy, and making them available to the scientific community
- **A Principal Investigator program** for feedback from operational applications and scientific studies based on the satellite observations

The sea-surface height measurement must be made with an accuracy of 4.2 cm or better (at 1 Hz) in order to meet the mission objectives. The SARAL/AltiKa satellite is specified and designed to



fulfill the mission objectives (see AD 1) and to take over from the Jason-1/2 mission. As for Jason-1/2, distribution of altimetric products (non-validated) in near real time is implemented. The interim (IGDR) and definitive (GDR) science products are delivered later (within 1.5 days for IGDR and within 40 days for GDR), following the model used for Jason-1 and Jason-2.

To ensure that science and mission goals are accomplished by the SARAL/AltiKa mission, the following requirements were established.

### 2.4.1. Accuracy of Sea-level Measurements

Generally speaking SARAL/AltiKa has been specified based on the Jason-2 state of the art, including improvements in payload technology, data processing and algorithms or ancillary data (e.g: precise orbit determination and meteorological model accuracy). The sea-surface height shall be provided with a globally averaged RMS accuracy of 4.2 cm (1 sigma), or better, assuming 1 second averages.

The instrumental and environmental corrections are provided with the appropriate accuracy to meet this requirement. In addition to these requirements, a set of measurement-system goals was established based on the anticipated impact of off-line ground processing improvements. These improvements are expected to enable reduction of sea-surface height errors to 3.2 cm RMS. Knowledge of the stability of the system is especially important to the goal of monitoring the change in the global mean sea level, hence a specification on the system drift with a 1 mm/year goal.

The following table provides a summary of the preliminary error budget.

( for 1s average, 2m SWH, 1dB σ0)	OGDR 3 Hours	IGDR 1.5 days	GDR 40 days	GOALS
Altimeter noise <sup>1</sup>	1.5 cm	1.5 cm	1.5 cm	1 cm
Ionosphere	0.6 cm	0.3 cm	0.3 cm	0.3 cm
Sea state bias	2 cm	2 cm	2 cm	2
Dry troposphere	1.5 cm	0.7 cm	0.7 cm	0.7 cm
Wet Troposphere	1.2 cm	1.2 cm	1.2 cm	1 cm
Altimeter range after corrections (RSS)	3.2 cm	2.9 cm	2.9 cm	2.6 cm
Orbit (Radial component) (RMS)	Req : 30 cm Goal : 10 cm	Req : 4 cm Goal : 2.5 cm	Req : 3 cm Goal : 2 cm	2 cm
Total RSS Sea Surface Height	Req : 30.2 cm	Req : 4.9 cm	Req : 4.2 cm	3.2 cm
Significant Wave Height (H1/3) <sup>2</sup>	6.3 cm	6.3 cm	6.3 cm	3.9 cm

<sup>1</sup> Note that an altimeter noise of 1 cm has been measured during instrument testing.

<sup>2</sup> Note that SWH noise of 5 cm has been measured during instrument testing.



Wind speed	2 m/s	1.7 m/s	1.7 m/s	<b>1 m/s</b>
------------	-------	---------	---------	--------------

**Table 3.** Preliminary AltiKa Data Products error budget

→ Estimation of in-flight performance:

The noise figures on the 3 geophysical parameters (range, SWH and sigma\_naught) have been computed with the SARAL AltiKa altimeter flight data in March 2013. This demonstrates the very good data quality provided by this instrument. In addition, we have compared those figures to the requirements and/or with the ground test performed during integration, as depicted in the table below the performances are very good and exceeding the mission requirements.

Altimeter parameter	Specifications	Measured on ground	In-flight data
1Hz range	1.5 cm	0.9 cm	0.9 cm
1Hz SWH	6.3 cm	5.7 cm	5 cm
1Hz sigma-0	0.2 dB*	NA	0.012 dB

\* includes the noise and the non-calibrated drift error

**Table 4.** SARAL/AltiKa noise figures measured in orbit

### 2.4.2. Sampling Strategy

As for Jason-1 and Jason-2, sea level shall be measured along a fixed grid of subsatellite tracks such that it is possible to investigate and minimize the spatial and temporal aliases of surface geostrophic currents and to minimize the influence of the geoid on measurements of the time-varying topography.

### 2.4.3. Tidal Aliases

On the SARAL orbit, the main tidal signals have aliases as described below:

Wave	Period (day)	Aliased period (day)
S1	1	Infinite
S2	0.5	infinite
K1	0.99727	365.24
K2	0.498635	182.62
M2	0.517525	94.49
N2	0.527431	97.39
P1	1.002745	365.25
O1	1.075806	75.07
Q1	1.119515	132.81
Mf	13.660791	79.92
Mm	27.554551	129.53
Ssa	182.621095	182.62
Sa	365.2594	365.26

**Table 5.** SARAL main tides signals aliases





Please note that the sun-synchronous orbit implies that S1 and S2 waves cannot be resolved.

## 2.4.4. Duration and coverage

Sea level shall be measured for a minimum of three years, with the potential to extend this period for an additional two years.


The SARAL/AltiKa satellite shall overfly the reference ENVISAT ground tracks.

## 2.5. Mission Description

SARAL/AltiKa uses an Earth orbiting satellite equipped with a radar altimeter and other instruments to directly measure sea-surface elevation along the fixed grid of sub-satellite ground tracks traced out by the ERS1/2 and ENVISAT satellites. In so doing, SARAL/AltiKa continues the data collection started with ERS1/2 and followed by ENVISAT. The sea-surface height measurement must be made with an accuracy of 4.2 cm or better (at 1 Hz) in order to meet the mission objectives. The SARAL/AltiKa satellite was specified and designed to fulfill the mission objectives and was launched in 2013 to take over for ENVISAT mission.

The ocean topography is obtained through three basic measurements:

- 1) the satellite range above the sea surface derived from the altimeter,
- 2) the tropospheric range delay measured by the radiometer to correct the altimeter range,
- 3) the altitude of the satellite above the reference ellipsoid derived from precise orbit determination.

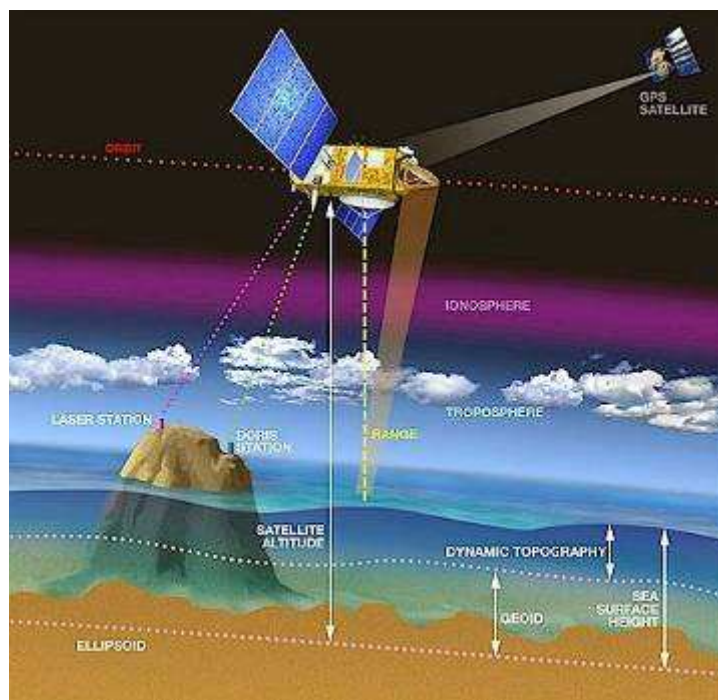

**Figure 2.** Geometry of the sea surface height measurement by altimetry

The altimeter uses radar pulses to determine precisely the distance between the satellite and the ocean surface by measuring the time taken by the emitted pulse to return. The shape and the amplitude of the echo enable the estimation of wave height and wind speed respectively. Geophysical corrections are then applied to compensate for the measurement errors introduced by propagation through the troposphere and ionosphere and errors induced by sea state.



---

Further information and details about radar altimetry principles and processing can be found on the following link : [http://www.altimetry.info/html/alti/welcome\\_en.html](http://www.altimetry.info/html/alti/welcome_en.html)

## 2.6. Satellite Description

---

The 405 kg satellite consists of a **SSB/ IMS-2 platform** and a **SARAL/AltiKa specific payload module**. The platform provides all housekeeping functions including propulsion, electrical power, command and data handling, telecommunications, and attitude control. The payload module provides mechanical, electrical, thermal, and dynamical support to the SARAL/AltiKa instruments.

The SARAL satellite is mainly composed of:

- a **spacecraft bus IMS-2** (Small Satellite Bus). This platform, developed by **ISRO**, is designed for satellites in the range of about 500 kg at launch.
- a **payload** developed by **CNES**.

The SARAL payload (see Figure 3) includes the following components:

- An **Altimeter**, provided by **CNES** - the main mission instrument and a dual frequency microwave **radiometer**, provided by **CNES** - to correct the altimeter measurement for atmospheric range delays induced by water vapor.

The **AltiKa** instrument consists of a Ka-band altimeter and an embedded dual frequency radiometer.

- The radio positioning **DORIS system**, provided by **CNES** - for precision orbit determination using dedicated ground stations
- A **Laser Reflector Array (LRA)**, provided by **CNES** - to calibrate the orbit determination system.

And the **ARGOS-3** instrument (and associated components) that has its own mission on-board the SARAL satellite as part of the ARGOS system.

Details about the satellite description can be found at: <http://smc.cnes.fr/SARAL/index.htm>.



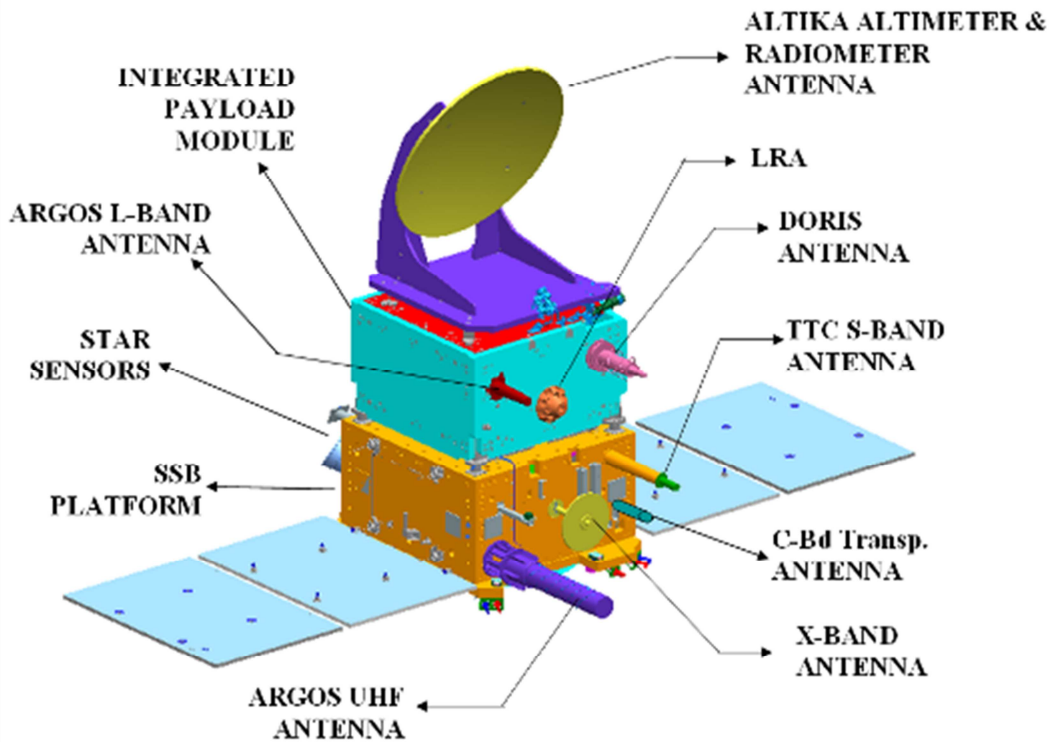


Figure 3 : AltiKa & Argos-3 payloads accommodation on SSB platform : SARAL satellite.

### 2.6.1. Satellite Characteristics

The main features of the SARAL/AltiKa satellite are summed up in the following table.

Satellite mass	405 kg
Satellite power	570 W
Platform mass	250 kg
Platform power	205 W
Payload mass	160 kg
Payload power	250 W
Altimeter mass	55 kg
Altimeter power	78 W
Launch Vehicle	PSLV
Launch Site	Satish Dhawan Space Center, SHAR SRIHARIKOTA

Table 6. Main features of the SARAL/AltiKa satellite

### 2.6.2. Sensors

#### 2.6.2.1. AltiKa Altimeter

The mono-frequency Ka-band (35.75 GHz) radar altimeter is the main part of AltiKa instrument. Its functions are based on proven concepts and already developed sub-systems, as it inherits from Siral (CRYOSAT mission) and Poseidon3 (Jason-2 mission).

The use of a single frequency is possible because ionosphere effects are small at such high frequencies (proportionality to the inverse of the squared frequency and of the order of 3 centimeters).



The main advantage of this higher frequency (Ka versus classical Ku/C altimeters) is the reduced altimeter footprint that leads to a better spatial resolution. The added advantage of AltiKa is due to its enhanced bandwidth (500 MHz), which leads to higher vertical resolution and an higher PRF which provides twice more elementary data than Jason-2. Thus, globally, an error budget improvement is encountered.

However, Ka-band has also drawbacks, mainly linked to its higher sensitivity to rainy and cloudy conditions.

The altimeter antenna is a fixed offset paraboloid (1 meter diameter), directed toward nadir of the satellite and located on the top of the satellite.

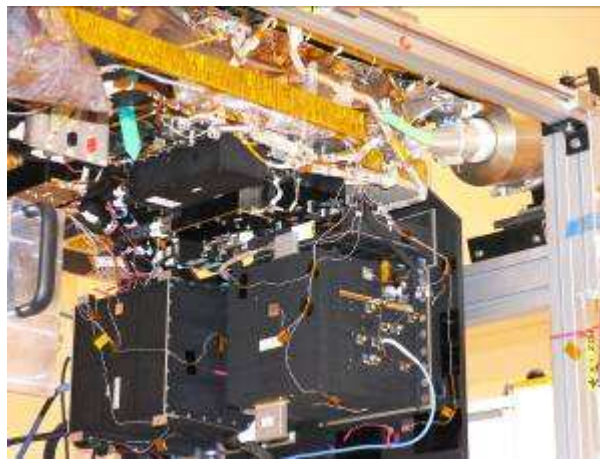


Figure 4 : SARAL/AltiKa Instrument

### 2.6.2.2. Dual frequency microwave radiometer

The bi-frequency (23.8 GHz / 37 GHz) radiometer is used to correct altimetry measurements from wet troposphere crossing effects. The 23.8 GHz channel is the primary water vapor sensing channel, meaning higher water vapor concentrations will lead to larger 23.8 GHz brightness temperature values. The addition of the 37 GHz channel, which has less sensitivity to water vapor, facilitate the removal of the contributions from cloud liquid water, which also act to increase the 23.8 GHz brightness temperature.

The antenna, shared with the altimeter, is fed by a two frequency coaxial corrugated horn feed.

A corrugated cold sky horn is used for the gain calibration of the 2 radiometer channels.


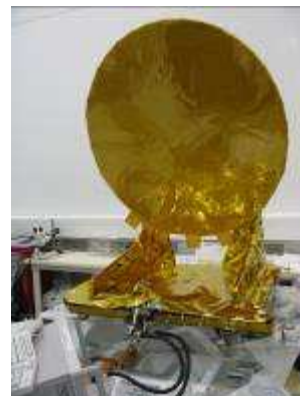


Figure 5 : SARAL/AltiKa radiometer Instrument and antenna (shared with altimeter)

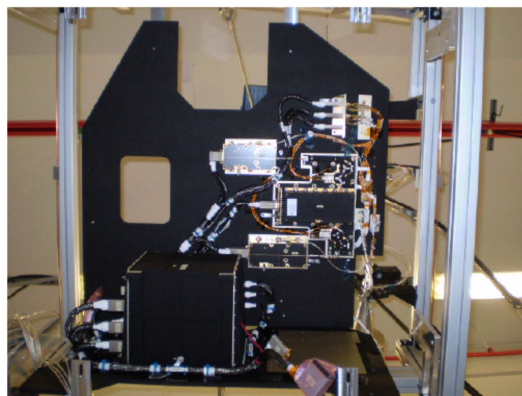

### 2.6.2.3. DORIS System

The complete DORIS system includes the DORIS on-board package, a network of approximately 60 beacons located around the world and a ground system.

The on-board package includes the electronic box hosting the receiver itself and the ultra stable oscillator and an omnidirectional antenna.

The DORIS on-board package is of the same version as the one embarked on Jason-2. It includes a 7-beacon receiving capability and an on-board real time function (DIODE for « Détermination Immédiate d'Orbite par DORIS Embarqué ») to compute the orbit ephemeris in real time.

The DORIS on-board package is dual string (in cold redundancy), each DORIS chain is automatically connected to the single antenna through a switching box inside the DORIS unit. Each receiver is connected to its own ultra-stable oscillator.

The DORIS antenna is located on the Earth panel of the satellite.

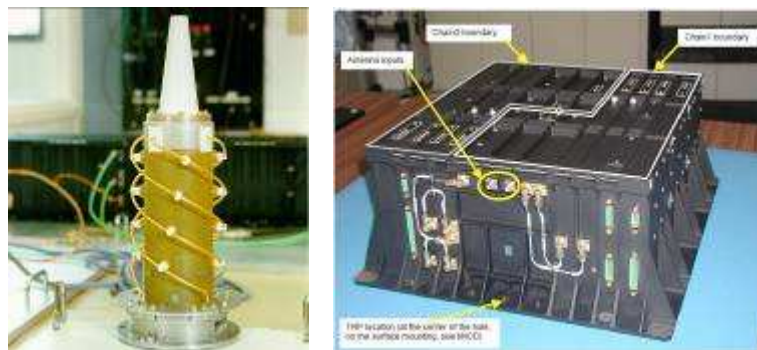


Figure 6 : SARAL/AltiKa DORIS Receiver Antenna and Instrument

### 2.6.2.4. Laser Reflector Array (LRA)

It is used for precise calibration of other POD instruments, through analysis of laser shots from the ground then reflected by the LRA mirrors.

The laser reflector array is placed on the nadir face of the satellite. It consists of several quartz corner cubes arrayed as a truncated cone with one in the center and the others distributed azimuthally around the cone.

The LRA is provided by CNES.



Figure 7 : SARAL/AltiKa Laser Reflector Array

### 2.6.2.5. ARGOS-3 Instrument

ARGOS is a **Data Collection and Localization System dedicated to environmental applications** (more than 18000 active platforms). This is a CNES / EUMETSAT / NOAA cooperation and ISRO will join the ARGOS Program with SARAL. Now in its 3rd generation of instruments embarked on



EUMETSAT/Metop and NOAA/POES (NOAA-N'), ARGOS-3 on SARAL will fill the 3<sup>rd</sup> orbit (@ 18h00) of ARGOS-3 system.



Figure 8 : Applications of the ARGOS system

ARGOS-3 UHF and L band antennas are located on the Earth face of the satellite.



Figure 9 : SARAL UHF antenna



Figure 10 : SARAL ARGOS-3 reception instrument

### 2.6.3. Orbit

The SARAL/AltiKa satellite flies on the same ground-track as ENVISAT with a 501-orbit, 1002-pass, 35-day exact repeat cycle. Orbital characteristics and the equator crossing longitudes for SARAL/AltiKa are given in orbit tables below.

At the beginning of the mission, the orbit was NOT exactly on the ENVISAT repetitive ground track. A deviation of the order of 2.5 km at high latitudes was observed. It has been corrected by several inclination maneuvers performed by ISRO. The nominal ENVISAT repetitive ground has been reached only late October 2013.






To locate a pass on the Earth, Google Earth can be used. More information are given on the AVISO Website about the pass locator:

<http://www.aviso.oceanobs.com/en/data/tools/pass-locator/index.html> (new address in Feb.2014:  
<http://www.aviso.altimetry.fr/en/data/tools/pass-locator/index.html>)

Figure below is a plot of the ground track on a world map (as there are 501 ground tracks, they are represented as ascending and descending passes).

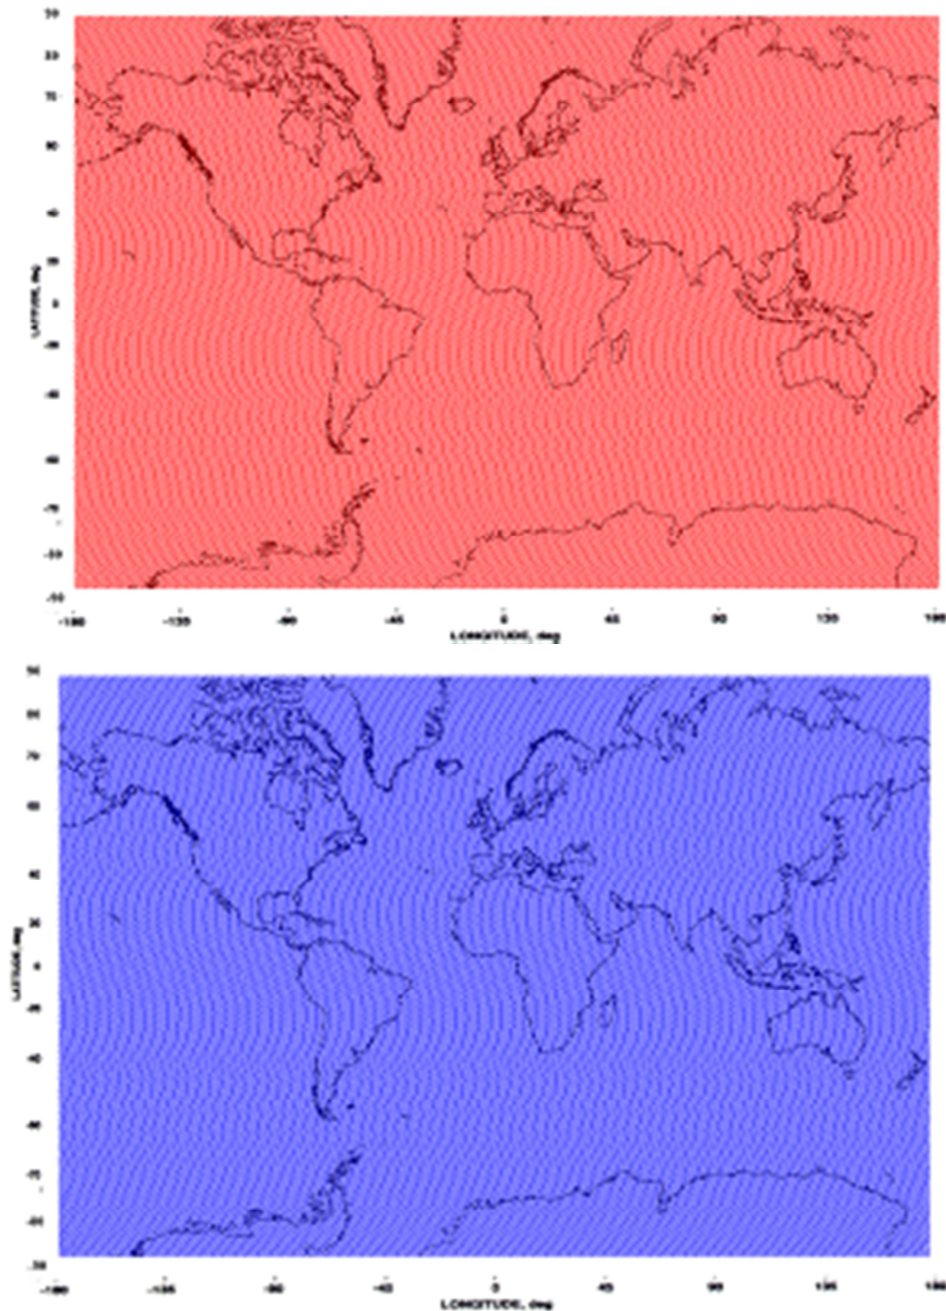

**Figure 11** : ENVISAT and SARAL/AltiKa ground track coverage every 35 days (ascending and descending passes)



The main characteristics of SARAL Sun-Synchronous Orbit are:

→ The mean classical orbit elements are given in the table below.

Orbit element	Value
Repeat period	35 days
Number of revolution within a cycle	501
Apogee altitude	814 km
Perigee altitude	786 km
Inclination	98.55 deg
Argument of perigee	90.0 deg
Local time at ascending node	06:00
Earth Longitude of equator ascending crossing of pass1	0.1335 deg
Ground track control band	+/- 1 km

**Table 7.** Mean classical orbit elements

→ The orbit auxiliary data are given in the table below.

Auxiliary Data	Values
Semi major axis	7159.496 km
Eccentricity	$1.165 \cdot 10^{-3}$
Nodal period	100.59 mn
Number of orbits per day	14+11/35
Equatorial cross track separation	75 km
Inertial nodal rate	0.9856 deg/day
Mean Orbital speed	7.47 km/s

**Table 8.** Orbit auxiliary data

This orbit overflies two verification sites funded by CNES and ISRO. The prime CNES verification site is located at Cape Senetosa on the island of Corsica (8°48' E, 41°34' N, ascending pass 85).

A satellite orbit slowly decays due to air drag, and has long-period variability because of the inhomogeneous gravity field of Earth, solar radiation pressure, and smaller forces. Periodic maneuvers are required to keep the satellite in its orbit. The frequency of maneuvers depends primarily on the solar flux as it affects the Earth's atmosphere, and there are expected to be one maneuver (or series of maneuvers) every 15 to 30 days.

Each orbit maintenance maneuver is performed using only one thrust to minimize impacts on the ground orbit solution. Orbit computation is optimized to minimize the orbit error during such periods. Science data are taken during orbit maintenance maneuvers and are distributed (an orbit state flag is provided in the products).



### 2.6.3.1. Equator Crossing Longitudes (in order of Pass Number)

Pass	Long (°)	Pass	Long (°)	Pass	Long (°)	Pass	Long (°)	Pass	Long (°)	Pass	Long (°)
1	0.13	40	49.73	80	266.74	120	123.74	160	340.75	200	197.75
2	167.58	41	217.14	81	74.14	121	291.15	161	148.16	201	5.16
3	334.98	42	24.58	82	241.59	122	98.59	162	315.60	202	172.61
4	142.43	43	191.99	83	48.99	123	266.00	163	123.01	203	340.01
5	309.83	44	359.43	84	216.44	124	73.45	164	290.45	204	147.46
6	117.28	45	166.84	85	23.84	125	240.85	165	97.86	205	314.86
7	284.68	46	334.28	86	191.29	126	48.30	166	265.30	206	122.31
8	92.13	47	141.69	87	358.70	127	215.70	167	72.71	207	289.71
9	259.54	48	309.13	88	166.14	128	23.15	168	240.15	208	97.16
10	66.98	49	116.54	89	333.55	129	190.55	169	47.56	209	264.56
11	234.39	50	283.98	90	140.99	130	358.00	170	215.00	210	72.01
12	41.83	51	91.39	91	308.40	131	165.40	171	22.41	211	239.41
13	209.24	52	258.83	92	115.84	132	332.85	172	189.85	212	46.86
14	16.68	53	66.24	93	283.25	133	140.25	173	357.26	213	214.26
15	184.09	54	233.68	94	90.69	134	307.70	174	164.70	214	21.71
16	351.53	55	41.09	95	258.10	135	115.10	175	332.11	215	189.11
17	158.94	56	208.53	96	65.54	136	282.55	176	139.55	216	356.56
18	326.38	57	15.94	97	232.95	137	89.95	177	306.96	217	163.96
19	133.79	58	183.38	98	40.39	138	257.40	178	114.40	218	331.41
20	301.23	59	350.79	99	207.80	139	64.80	179	281.81	219	138.81
21	108.64	60	158.24	100	15.24	140	232.25	180	89.25	220	306.26
22	276.08	61	325.64	101	182.65	141	39.65	181	256.66	221	113.67
23	83.49	62	133.09	102	350.09	142	207.10	182	64.10	222	281.11
24	250.93	63	300.49	103	157.50	143	14.50	183	231.51	223	88.51
25	58.34	64	107.94	104	324.94	144	181.95	184	38.95	224	255.96
26	225.78	65	275.34	105	132.35	145	349.35	185	206.36	225	63.36
27	33.19	66	82.79	106	299.79	146	156.80	186	13.80	226	230.81
28	200.63	67	250.19	107	107.20	147	324.20	187	181.21	227	38.21
29	8.04	68	57.64	108	274.64	148	131.65	188	348.65	228	205.66
30	175.48	69	225.04	109	82.05	149	299.05	189	156.06	229	13.07
31	342.89	70	32.49	110	249.49	150	106.50	190	323.50	230	180.51
32	150.33	71	199.89	111	56.90	151	273.91	191	130.91	231	347.92
33	317.74	72	7.34	112	224.34	152	81.35	192	298.35	232	155.36
34	125.18	73	174.74	113	31.75	153	248.76	193	105.76	233	322.77
35	292.59	74	342.19	114	199.19	154	56.20	194	273.20	234	130.21
36	100.03	75	149.59	115	6.60	155	223.61	195	80.61	235	297.62
37	267.44	76	317.04	116	174.04	156	31.05	196	248.05	236	105.06
38	74.88	77	124.44	117	341.45	157	198.46	197	55.46	237	272.47
39	242.29	78	291.89	118	148.89	158	5.90	198	222.90	238	79.91
40	49.73	79	99.29	119	316.30	159	173.31	199	30.31	239	247.32





Pass	Long (°)	Pass	Long (°)	Pass	Long (°)	Pass	Long (°)	Pass	Long (°)	Pass	Long (°)
240	54.76	280	271.77	320	128.77	360	345.78	400	202.78	440	59.79
241	222.17	281	79.17	321	296.18	361	153.19	401	10.19	441	227.20
242	29.61	282	246.62	322	103.62	362	320.63	402	177.64	442	34.64
243	197.02	283	54.02	323	271.03	363	128.04	403	345.04	443	202.05
244	4.46	284	221.47	324	78.47	364	295.48	404	152.49	444	9.49
245	171.87	285	28.87	325	245.88	365	102.89	405	319.89	445	176.90
246	339.31	286	196.32	326	53.33	366	270.33	406	127.34	446	344.34
247	146.72	287	3.72	327	220.73	367	77.74	407	294.74	447	151.75
248	314.16	288	171.17	328	28.18	368	245.18	408	102.19	448	319.19
249	121.57	289	338.58	329	195.58	369	52.59	409	269.59	449	126.60
250	289.01	290	146.02	330	3.02	370	220.03	410	77.04	450	294.04
251	96.42	291	313.43	331	170.43	371	27.44	411	244.45	451	101.45
252	263.86	292	120.87	332	337.88	372	194.88	412	51.89	452	268.89
253	71.27	293	288.28	333	145.28	373	2.29	413	219.30	453	76.30
254	238.71	294	95.72	334	312.73	374	169.73	414	26.74	454	243.74
255	46.12	295	263.13	335	120.13	375	337.14	415	194.15	455	51.15
256	213.56	296	70.57	336	287.58	376	144.58	416	1.59	456	218.59
257	20.97	297	237.98	337	94.98	377	311.99	417	169.00	457	26.00
258	188.41	298	45.42	338	262.43	378	119.43	418	336.44	458	193.44
259	355.82	299	212.83	339	69.83	379	286.84	419	143.85	459	0.85
260	163.26	300	20.27	340	237.28	380	94.28	420	311.29	460	168.29
261	330.67	301	187.68	341	44.68	381	261.69	421	118.70	461	335.70
262	138.11	302	355.12	342	212.13	382	69.13	422	286.14	462	143.14
263	305.52	303	162.53	343	19.53	383	236.54	423	93.55	463	310.55
264	112.96	304	329.97	344	186.98	384	43.98	424	260.99	464	117.99
265	280.37	305	137.38	345	354.38	385	211.39	425	68.39	465	285.40
266	87.82	306	304.82	346	161.83	386	18.83	426	235.84	466	92.85
267	255.22	307	112.23	347	329.23	387	186.24	427	43.24	467	260.25
268	62.67	308	279.67	348	136.68	388	353.68	428	210.69	468	67.70
269	230.07	309	87.08	349	304.08	389	161.09	429	18.10	469	235.10
270	37.52	310	254.52	350	111.53	390	328.53	430	185.54	470	42.55
271	204.92	311	61.93	351	278.94	391	135.94	431	352.95	471	209.95
272	12.37	312	229.37	352	86.38	392	303.38	432	160.39	472	17.40
273	179.77	313	36.78	353	253.79	393	110.79	433	327.80	473	184.80
274	347.22	314	204.22	354	61.23	394	278.23	434	135.24	474	352.25
275	154.62	315	11.63	355	228.64	395	85.64	435	302.65	475	159.65
276	322.07	316	179.07	356	36.08	396	253.08	436	110.09	476	327.10
277	129.47	317	346.48	357	203.49	397	60.49	437	277.50	477	134.50
278	296.92	318	153.92	358	10.93	398	227.93	438	84.94	478	301.95
279	104.32	319	321.33	359	178.34	399	35.34	439	252.35	479	109.35



---

Pass	Long (°)	Pass	Long (°)	Pass	Long (°)	Pass	Long (°)	Pass	Long (°)	Pass	Long (°)
480	276.80	520	133.80	560	350.81	600	207.82	640	64.82	680	281.83
481	84.20	521	301.21	561	158.22	601	15.22	641	232.23	681	89.23
482	251.65	522	108.65	562	325.66	602	182.67	642	39.67	682	256.68
483	59.05	523	276.06	563	133.07	603	350.07	643	207.08	683	64.08
484	226.50	524	83.51	564	300.51	604	157.52	644	14.52	684	231.53
485	33.90	525	250.91	565	107.92	605	324.92	645	181.93	685	38.93
486	201.35	526	58.36	566	275.36	606	132.37	646	349.37	686	206.38
487	8.76	527	225.76	567	82.77	607	299.77	647	156.78	687	13.79
488	176.20	528	33.21	568	250.21	608	107.22	648	324.22	688	181.23
489	343.61	529	200.61	569	57.62	609	274.63	649	131.63	689	348.64
490	151.05	530	8.06	570	225.06	610	82.07	650	299.07	690	156.08
491	318.46	531	175.46	571	32.47	611	249.48	651	106.48	691	323.49
492	125.90	532	342.91	572	199.91	612	56.92	652	273.92	692	130.93
493	293.31	533	150.31	573	7.32	613	224.33	653	81.33	693	298.34
494	100.75	534	317.76	574	174.76	614	31.77	654	248.77	694	105.78
495	268.16	535	125.16	575	342.17	615	199.18	655	56.18	695	273.19
496	75.60	536	292.61	576	149.61	616	6.62	656	223.62	696	80.63
497	243.01	537	100.01	577	317.02	617	174.03	657	31.03	697	248.04
498	50.45	538	267.46	578	124.46	618	341.47	658	198.47	698	55.48
499	217.86	539	74.86	579	291.87	619	148.88	659	5.88	699	222.89
500	25.30	540	242.31	580	99.31	620	316.32	660	173.33	700	30.33
501	192.71	541	49.71	581	266.72	621	123.73	661	340.73	701	197.74
502	0.15	542	217.16	582	74.16	622	291.17	662	148.18	702	5.18
503	167.56	543	24.56	583	241.57	623	98.58	663	315.58	703	172.59
504	335.00	544	192.01	584	49.01	624	266.02	664	123.03	704	340.03
505	142.41	545	359.41	585	216.42	625	73.43	665	290.43	705	147.44
506	309.85	546	166.86	586	23.86	626	240.87	666	97.88	706	314.88
507	117.26	547	334.27	587	191.27	627	48.28	667	265.28	707	122.29
508	284.70	548	141.71	588	358.71	628	215.72	668	72.73	708	289.73
509	92.11	549	309.12	589	166.12	629	23.13	669	240.14	709	97.14
510	259.55	550	116.56	590	333.57	630	190.57	670	47.58	710	264.58
511	66.96	551	283.97	591	140.97	631	357.98	671	214.98	711	71.99
512	234.40	552	91.41	592	308.42	632	165.42	672	22.43	712	239.43
513	41.81	553	258.82	593	115.82	633	332.83	673	189.83	713	46.84
514	209.25	554	66.26	594	283.27	634	140.27	674	357.28	714	214.28
515	16.66	555	233.67	595	90.67	635	307.68	675	164.68	715	21.69
516	184.10	556	41.11	596	258.12	636	115.12	676	332.13	716	189.13
517	351.51	557	208.52	597	65.52	637	282.53	677	139.54	717	356.54
518	158.95	558	15.96	598	232.96	638	89.97	678	306.98	718	163.98
519	326.36	559	183.37	599	40.37	639	257.38	679	114.39	719	331.39



---

Pass	Long (°)	Pass	Long (°)	Pass	Long (°)	Pass	Long (°)	Pass	Long (°)	Pass	Long (°)
720	138.83	760	355.84	800	212.85	840	69.85	880	286.86	920	143.86
721	306.24	761	163.25	801	20.25	841	237.26	881	94.26	921	311.27
722	113.68	762	330.69	802	187.70	842	44.70	882	261.71	922	118.71
723	281.09	763	138.10	803	355.10	843	212.11	883	69.11	923	286.12
724	88.54	764	305.54	804	162.55	844	19.55	884	236.56	924	93.56
725	255.94	765	112.95	805	329.95	845	186.96	885	43.96	925	260.97
726	63.39	766	280.39	806	137.40	846	354.40	886	211.41	926	68.42
727	230.79	767	87.80	807	304.80	847	161.81	887	18.81	927	235.82
728	38.24	768	255.24	808	112.25	848	329.25	888	186.26	928	43.27
729	205.64	769	62.65	809	279.65	849	136.66	889	353.67	929	210.67
730	13.09	770	230.09	810	87.10	850	304.10	890	161.11	930	18.12
731	180.49	771	37.50	811	254.51	851	111.51	891	328.52	931	185.52
732	347.94	772	204.94	812	61.95	852	278.95	892	135.96	932	352.97
733	155.34	773	12.35	813	229.36	853	86.36	893	303.37	933	160.37
734	322.79	774	179.79	814	36.80	854	253.80	894	110.81	934	327.82
735	130.19	775	347.20	815	204.21	855	61.21	895	278.22	935	135.22
736	297.64	776	154.64	816	11.65	856	228.65	896	85.66	936	302.67
737	105.04	777	322.05	817	179.06	857	36.06	897	253.07	937	110.07
738	272.49	778	129.49	818	346.50	858	203.50	898	60.51	938	277.52
739	79.89	779	296.90	819	153.91	859	10.91	899	227.92	939	84.92
740	247.34	780	104.34	820	321.35	860	178.35	900	35.36	940	252.37
741	54.74	781	271.75	821	128.76	861	345.76	901	202.77	941	59.77
742	222.19	782	79.19	822	296.20	862	153.21	902	10.21	942	227.22
743	29.59	783	246.60	823	103.61	863	320.61	903	177.62	943	34.62
744	197.04	784	54.05	824	271.05	864	128.06	904	345.06	944	202.07
745	4.44	785	221.45	825	78.46	865	295.46	905	152.47	945	9.47
746	171.89	786	28.90	826	245.90	866	102.91	906	319.91	946	176.92
747	339.30	787	196.30	827	53.31	867	270.31	907	127.32	947	344.32
748	146.74	788	3.74	828	220.75	868	77.76	908	294.76	948	151.77
749	314.15	789	171.15	829	28.16	869	245.16	909	102.17	949	319.17
750	121.59	790	338.60	830	195.60	870	52.61	910	269.61	950	126.62
751	289.00	791	146.00	831	3.01	871	220.01	911	77.02	951	294.02
752	96.44	792	313.45	832	170.45	872	27.46	912	244.46	952	101.47
753	263.85	793	120.85	833	337.86	873	194.86	913	51.87	953	268.88
754	71.29	794	288.30	834	145.30	874	2.31	914	219.31	954	76.32
755	238.70	795	95.70	835	312.71	875	169.71	915	26.72	955	243.73
756	46.14	796	263.15	836	120.15	876	337.16	916	194.16	956	51.17
757	213.55	797	70.55	837	287.56	877	144.56	917	1.57	957	218.58
758	20.99	798	238.00	838	95.00	878	312.01	918	169.01	958	26.02
759	188.40	799	45.40	839	262.41	879	119.42	919	336.42	959	193.43



---

Pass	Long (°)	Pass	Long (°)
960	0.87	1000	217.87
961	168.28	1001	25.28
962	335.72	1002	192.72
963	143.13		
964	310.57		
965	117.98		
966	285.42		
967	92.83		
968	260.27		
969	67.68		
970	235.12		
971	42.53		
972	209.97		
973	17.38		
974	184.82		
975	352.23		
976	159.67		
977	327.08		
978	134.52		
979	301.93		
980	109.37		
981	276.78		
982	84.22		
983	251.63		
984	59.07		
985	226.48		
986	33.92		
987	201.33		
988	8.77		
989	176.18		
990	343.62		
991	151.03		
992	318.47		
993	125.88		
994	293.33		
995	100.73		
996	268.17		
997	75.58		
998	243.02		
999	50.43		

**Table 9.** Equator Crossing Longitudes (in order of Pass Number)



### 2.6.3.2. Equator Crossing Longitudes (in order of Longitude)

Pass	Long(°)	Pass	Long(°)	Pass	Long(°)	Pass	Long(°)	Pass	Long(°)	Pass	Long(°)
1	0.13	186	13.8	328	28.18	470	42.55	612	56.92	754	71.29
502	0.15	143	14.5	285	28.87	427	43.24	569	57.62	711	71.99
459	0.85	644	14.52	786	28.9	928	43.27	68	57.64	210	72.01
960	0.87	601	15.22	743	29.59	885	43.96	25	58.34	167	72.71
917	1.57	100	15.24	242	29.61	384	43.98	526	58.36	668	72.73
416	1.59	57	15.94	199	30.31	341	44.68	483	59.05	625	73.43
373	2.29	558	15.96	700	30.33	842	44.7	984	59.07	124	73.45
874	2.31	515	16.66	657	31.03	799	45.4	941	59.77	81	74.14
831	3.01	14	16.68	156	31.05	298	45.42	440	59.79	582	74.16
330	3.02	973	17.38	113	31.75	255	46.12	397	60.49	539	74.86
287	3.72	472	17.4	614	31.77	756	46.14	898	60.51	38	74.88
788	3.74	429	18.1	571	32.47	713	46.84	855	61.21	997	75.58
745	4.44	930	18.12	70	32.49	212	46.86	354	61.23	496	75.6
244	4.46	887	18.81	27	33.19	169	47.56	311	61.93	453	76.3
201	5.16	386	18.83	528	33.21	670	47.58	812	61.95	954	76.32
702	5.18	343	19.53	485	33.9	627	48.28	769	62.65	911	77.02
659	5.88	844	19.55	986	33.92	126	48.3	268	62.67	410	77.04
158	5.9	801	20.25	943	34.62	83	48.99	225	63.36	367	77.74
115	6.6	300	20.27	442	34.64	584	49.01	726	63.39	868	77.76
616	6.62	257	20.97	399	35.34	541	49.71	683	64.08	825	78.46
573	7.32	758	20.99	900	35.36	40	49.73	182	64.1	324	78.47
72	7.34	715	21.69	857	36.06	999	50.43	139	64.8	281	79.17
29	8.04	214	21.71	356	36.08	498	50.45	640	64.82	782	79.19
530	8.06	171	22.41	313	36.78	455	51.15	597	65.52	739	79.89
487	8.76	672	22.43	814	36.8	956	51.17	96	65.54	238	79.91
988	8.77	629	23.13	771	37.5	913	51.87	53	66.24	195	80.61
945	9.47	128	23.15	270	37.52	412	51.89	554	66.26	696	80.63
444	9.49	85	23.84	227	38.21	369	52.59	511	66.96	653	81.33
401	10.19	586	23.86	728	38.24	870	52.61	10	66.98	152	81.35
902	10.21	543	24.56	685	38.93	827	53.31	969	67.68	109	82.05
859	10.91	42	24.58	184	38.95	326	53.33	468	67.7	610	82.07
358	10.93	1001	25.28	141	39.65	283	54.02	425	68.39	567	82.77
315	11.63	500	25.3	642	39.67	784	54.05	926	68.42	66	82.79
816	11.65	457	26	599	40.37	741	54.74	883	69.11	23	83.49
773	12.35	958	26.02	98	40.39	240	54.76	382	69.13	524	83.51
272	12.37	915	26.72	55	41.09	197	55.46	339	69.83	481	84.2
229	13.07	414	26.74	556	41.11	698	55.48	840	69.85	982	84.22
730	13.09	371	27.44	513	41.81	655	56.18	797	70.55	939	84.92
687	13.79	872	27.46	12	41.83	154	56.2	296	70.57	438	84.94
186	13.8	829	28.16	971	42.53	111	56.9	253	71.27	395	85.64



Pass	Long(°)	Pass	Long(°)	Pass	Long(°)	Pass	Long(°)	Pass	Long(°)	Pass	Long(°)
896	85.66	36	100.03	178	114.4	320	128.77	462	143.14	604	157.52
853	86.36	995	100.73	135	115.1	277	129.47	419	143.85	561	158.22
352	86.38	494	100.75	636	115.12	778	129.49	920	143.86	60	158.24
309	87.08	451	101.45	593	115.82	735	130.19	877	144.56	17	158.94
810	87.1	952	101.47	92	115.84	234	130.21	376	144.58	518	158.95
767	87.8	909	102.17	49	116.54	191	130.91	333	145.28	475	159.65
266	87.82	408	102.19	550	116.56	692	130.93	834	145.3	976	159.67
223	88.51	365	102.89	507	117.26	649	131.63	791	146	933	160.37
724	88.54	866	102.91	6	117.28	148	131.65	290	146.02	432	160.39
681	89.23	823	103.61	965	117.98	105	132.35	247	146.72	389	161.09
180	89.25	322	103.62	464	117.99	606	132.37	748	146.74	890	161.11
137	89.95	279	104.32	421	118.7	563	133.07	705	147.44	847	161.81
638	89.97	780	104.34	922	118.71	62	133.09	204	147.46	346	161.83
595	90.67	737	105.04	879	119.42	19	133.79	161	148.16	303	162.53
94	90.69	236	105.06	378	119.43	520	133.8	662	148.18	804	162.55
51	91.39	193	105.76	335	120.13	477	134.5	619	148.88	761	163.25
552	91.41	694	105.78	836	120.15	978	134.52	118	148.89	260	163.26
509	92.11	651	106.48	793	120.85	935	135.22	75	149.59	217	163.96
8	92.13	150	106.5	292	120.87	434	135.24	576	149.61	718	163.98
967	92.83	107	107.2	249	121.57	391	135.94	533	150.31	675	164.68
466	92.85	608	107.22	750	121.59	892	135.96	32	150.33	174	164.7
423	93.55	565	107.92	707	122.29	849	136.66	991	151.03	131	165.4
924	93.56	64	107.94	206	122.31	348	136.68	490	151.05	632	165.42
881	94.26	21	108.64	163	123.01	305	137.38	447	151.75	589	166.12
380	94.28	522	108.65	664	123.03	806	137.4	948	151.77	88	166.14
337	94.98	479	109.35	621	123.73	763	138.1	905	152.47	45	166.84
838	95	980	109.37	120	123.74	262	138.11	404	152.49	546	166.86
795	95.7	937	110.07	77	124.44	219	138.81	361	153.19	503	167.56
294	95.72	436	110.09	578	124.46	720	138.83	862	153.21	2	167.58
251	96.42	393	110.79	535	125.16	677	139.54	819	153.91	961	168.28
752	96.44	894	110.81	34	125.18	176	139.55	318	153.92	460	168.29
709	97.14	851	111.51	993	125.88	133	140.25	275	154.62	417	169
208	97.16	350	111.53	492	125.9	634	140.27	776	154.64	918	169.01
165	97.86	307	112.23	449	126.6	591	140.97	733	155.34	875	169.71
666	97.88	808	112.25	950	126.62	90	140.99	232	155.36	374	169.73
623	98.58	765	112.95	907	127.32	47	141.69	189	156.06	331	170.43
122	98.59	264	112.96	406	127.34	548	141.71	690	156.08	832	170.45
79	99.29	221	113.67	363	128.04	505	142.41	647	156.78	789	171.15
580	99.31	722	113.68	864	128.06	4	142.43	146	156.8	288	171.17
537	100.01	679	114.39	821	128.76	963	143.13	103	157.5	245	171.87





Pass	Long(°)	Pass	Long(°)	Pass	Long(°)	Pass	Long(°)	Pass	Long(°)	Pass	Long(°)
746	171.89	888	186.26	28	200.63	170	215	312	229.37	454	243.74
703	172.59	845	186.96	987	201.33	127	215.7	269	230.07	411	244.45
202	172.61	344	186.98	486	201.35	628	215.72	770	230.09	912	244.46
159	173.31	301	187.68	443	202.05	585	216.42	727	230.79	869	245.16
660	173.33	802	187.7	944	202.07	84	216.44	226	230.81	368	245.18
617	174.03	759	188.4	901	202.77	41	217.14	183	231.51	325	245.88
116	174.04	258	188.41	400	202.78	542	217.16	684	231.53	826	245.9
73	174.74	215	189.11	357	203.49	499	217.86	641	232.23	783	246.6
574	174.76	716	189.13	858	203.5	1000	217.87	140	232.25	282	246.62
531	175.46	673	189.83	815	204.21	957	218.58	97	232.95	239	247.32
30	175.48	172	189.85	314	204.22	456	218.59	598	232.96	740	247.34
989	176.18	129	190.55	271	204.92	413	219.3	555	233.67	697	248.04
488	176.2	630	190.57	772	204.94	914	219.31	54	233.68	196	248.05
445	176.9	587	191.27	729	205.64	871	220.01	11	234.39	153	248.76
946	176.92	86	191.29	228	205.66	370	220.03	512	234.4	654	248.77
903	177.62	43	191.99	185	206.36	327	220.73	469	235.1	611	249.48
402	177.64	544	192.01	686	206.38	828	220.75	970	235.12	110	249.49
359	178.34	501	192.71	643	207.08	785	221.45	927	235.82	67	250.19
860	178.35	1002	192.72	142	207.1	284	221.47	426	235.84	568	250.21
817	179.06	959	193.43	99	207.8	241	222.17	383	236.54	525	250.91
316	179.07	458	193.44	600	207.82	742	222.19	884	236.56	24	250.93
273	179.77	415	194.15	557	208.52	699	222.89	841	237.26	983	251.63
774	179.79	916	194.16	56	208.53	198	222.9	340	237.28	482	251.65
731	180.49	873	194.86	13	209.24	155	223.61	297	237.98	439	252.35
230	180.51	372	194.88	514	209.25	656	223.62	798	238	940	252.37
187	181.21	329	195.58	471	209.95	613	224.33	755	238.7	897	253.07
688	181.23	830	195.6	972	209.97	112	224.34	254	238.71	396	253.08
645	181.93	787	196.3	929	210.67	69	225.04	211	239.41	353	253.79
144	181.95	286	196.32	428	210.69	570	225.06	712	239.43	854	253.8
101	182.65	243	197.02	385	211.39	527	225.76	669	240.14	811	254.51
602	182.67	744	197.04	886	211.41	26	225.78	168	240.15	310	254.52
559	183.37	701	197.74	843	212.11	985	226.48	125	240.85	267	255.22
58	183.38	200	197.75	342	212.13	484	226.5	626	240.87	768	255.24
15	184.09	157	198.46	299	212.83	441	227.2	583	241.57	725	255.94
516	184.1	658	198.47	800	212.85	942	227.22	82	241.59	224	255.96
473	184.8	615	199.18	757	213.55	899	227.92	39	242.29	181	256.66
974	184.82	114	199.19	256	213.56	398	227.93	540	242.31	682	256.68
931	185.52	71	199.89	213	214.26	355	228.64	497	243.01	639	257.38
430	185.54	572	199.91	714	214.28	856	228.65	998	243.02	138	257.4
387	186.24	529	200.61	671	214.98	813	229.36	955	243.73	95	258.1



Pass	Long(°)	Pass	Long(°)	Pass	Long(°)	Pass	Long(°)	Pass	Long(°)	Pass	Long(°)
596	258.12	738	272.49	880	286.86	20	301.23	162	315.6	304	329.97
553	258.82	695	273.19	837	287.56	979	301.93	119	316.3	261	330.67
52	258.83	194	273.2	336	287.58	478	301.95	620	316.32	762	330.69
9	259.54	151	273.91	293	288.28	435	302.65	577	317.02	719	331.39
510	259.55	652	273.92	794	288.3	936	302.67	76	317.04	218	331.41
467	260.25	609	274.63	751	289	893	303.37	33	317.74	175	332.11
968	260.27	108	274.64	250	289.01	392	303.38	534	317.76	676	332.13
925	260.97	65	275.34	207	289.71	349	304.08	491	318.46	633	332.83
424	260.99	566	275.36	708	289.73	850	304.1	992	318.47	132	332.85
381	261.69	523	276.06	665	290.43	807	304.8	949	319.17	89	333.55
882	261.71	22	276.08	164	290.45	306	304.82	448	319.19	590	333.57
839	262.41	981	276.78	121	291.15	263	305.52	405	319.89	547	334.27
338	262.43	480	276.8	622	291.17	764	305.54	906	319.91	46	334.28
295	263.13	437	277.5	579	291.87	721	306.24	863	320.61	3	334.98
796	263.15	938	277.52	78	291.89	220	306.26	362	320.63	504	335
753	263.85	895	278.22	35	292.59	177	306.96	319	321.33	461	335.7
252	263.86	394	278.23	536	292.61	678	306.98	820	321.35	962	335.72
209	264.56	351	278.94	493	293.31	635	307.68	777	322.05	919	336.42
710	264.58	852	278.95	994	293.33	134	307.7	276	322.07	418	336.44
667	265.28	809	279.65	951	294.02	91	308.4	233	322.77	375	337.14
166	265.3	308	279.67	450	294.04	592	308.42	734	322.79	876	337.16
123	266	265	280.37	407	294.74	549	309.12	691	323.49	833	337.86
624	266.02	766	280.39	908	294.76	48	309.13	190	323.5	332	337.88
581	266.72	723	281.09	865	295.46	5	309.83	147	324.2	289	338.58
80	266.74	222	281.11	364	295.48	506	309.85	648	324.22	790	338.6
37	267.44	179	281.81	321	296.18	463	310.55	605	324.92	747	339.3
538	267.46	680	281.83	822	296.2	964	310.57	104	324.94	246	339.31
495	268.16	637	282.53	779	296.9	921	311.27	61	325.64	203	340.01
996	268.17	136	282.55	278	296.92	420	311.29	562	325.66	704	340.03
953	268.88	93	283.25	235	297.62	377	311.99	519	326.36	661	340.73
452	268.89	594	283.27	736	297.64	878	312.01	18	326.38	160	340.75
409	269.59	551	283.97	693	298.34	835	312.71	977	327.08	117	341.45
910	269.61	50	283.98	192	298.35	334	312.73	476	327.1	618	341.47
867	270.31	7	284.68	149	299.05	291	313.43	433	327.8	575	342.17
366	270.33	508	284.7	650	299.07	792	313.45	934	327.82	74	342.19
323	271.03	465	285.4	607	299.77	749	314.15	891	328.52	31	342.89
824	271.05	966	285.42	106	299.79	248	314.16	390	328.53	532	342.91
781	271.75	923	286.12	63	300.49	205	314.86	347	329.23	489	343.61
280	271.77	422	286.14	564	300.51	706	314.88	848	329.25	990	343.62
237	272.47	379	286.84	521	301.21	663	315.58	805	329.95	947	344.32





Pass	Long (°)	Pass	Long(°)
446	344.34	588	358.71
403	345.04	545	359.41
904	345.06	44	359.43
861	345.76		
360	345.78		
317	346.48		
818	346.5		
775	347.2		
274	347.22		
231	347.92		
732	347.94		
689	348.64		
188	348.65		
145	349.35		
646	349.37		
603	350.07		
102	350.09		
59	350.79		
560	350.81		
517	351.51		
16	351.53		
975	352.23		
474	352.25		
431	352.95		
932	352.97		
889	353.67		
388	353.68		
345	354.38		
846	354.4		
803	355.1		
302	355.12		
259	355.82		
760	355.84		
717	356.54		
216	356.56		
173	357.26		
674	357.28		
631	357.98		
130	358		
87	358.7		

Table 10 : Equator Crossing Longitudes (in order of Longitude)



### 2.6.4. The SARAL/AltiKa Project Phases

The satellite mission has two main phases (verification and operational).

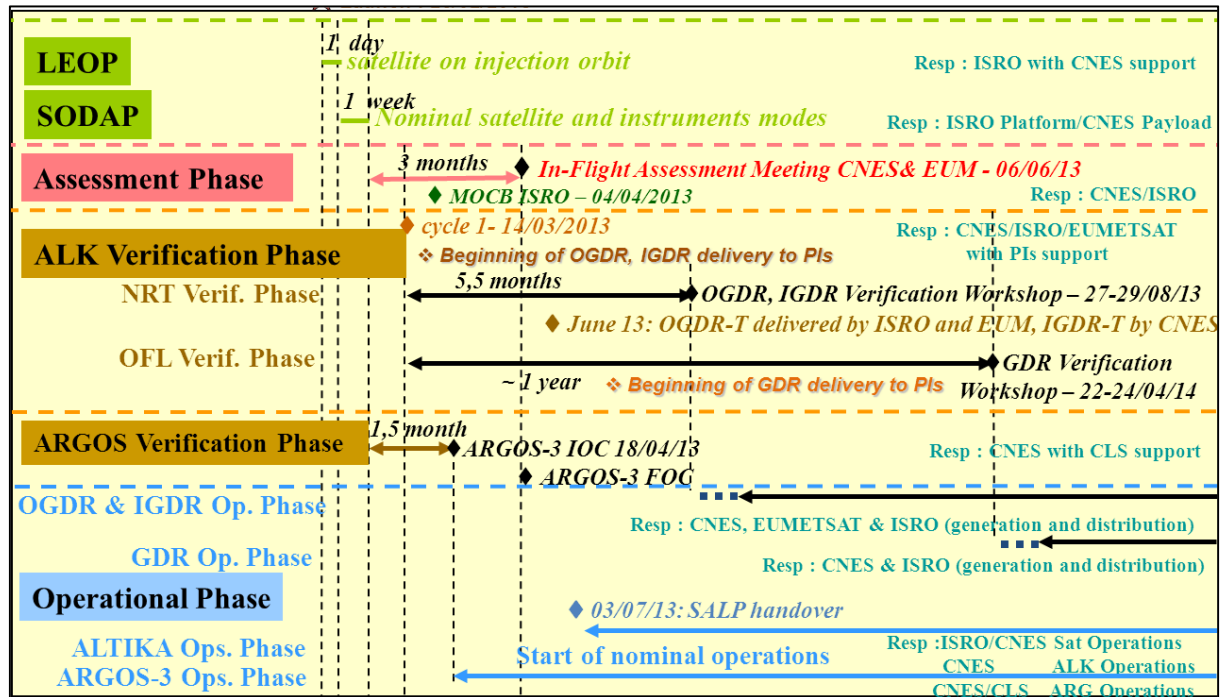


Figure 12 : SARAL Mission Phases and associated responsibilities

#### 2.6.4.1. The verification phase

The verification phase (9 -10 months since beginning of cycle 1) began shortly after launch, when the satellite reached the operational (nominal repetitive) orbit and the satellite and sensor systems were functioning normally. This phase continued until the data received from the sensors were satisfactorily calibrated and verified.

During this calibration/validation phase, the quality control is achieved through many steps as a series of quality controls designed to ensure a continuous supply of data : regular cyclic data product analysis (complete parameter analysis and diagnostics, missions/edited measurements, crossovers and along-track analysis, orbit analysis, ...), cross-calibration with other altimeters (Jason-2,...), instrumental expertise for altimeter and radiometer monitoring, and by performing absolute calibration at dedicated *in situ* calibration sites.

This verification phase is divided in 2 phases which overlap:

1. One dedicated to the validation of the near real time products (OGDRs).
2. The second phase dedicated to the validation of the off-line products (IGDR and GDR).

#### 2.6.4.2. The operational (routine and long-term CALVAL activities)

The operational phase begins after the successful validation of each product type, and when all necessary algorithm and processing changes are implemented to have SARAL/AltiKa performances at the same level as other altimetric satellites. Beyond the CALVAL phase, it is necessary to perform regular long-term CALVAL in order to monitor biases and drifts of AltiKa overall system: in addition to previously mentioned analysis, comparison of SARAL/AltiKa data with global and regional networks of *in situ* data (tide gauges, T/S profiles, ...) will be performed as soon as enough *in situ* data are available (~1 year after launch). These different analysis will also be implemented in order to calibrate and validate new ground processing algorithms that could be proposed and implemented during the CALVAL phase.



Considering the specificities of SARAL/AltiKa mission, particular attention will be given to evaluate and monitor the mission performances over coastal and inland water areas, over polar oceans and ice surfaces, as well as under rainy/cloudy conditions, with respect to previous and other in-flight altimetry missions.

## 2.7. Data Processing and Distribution

Processing centers perform functions such as science data processing, data verification and orbit determination.

There are three levels of processed data:

- Telemetry data (raw data or level0)
- Sensor Data Records (engineering units or level1)
- Geophysical Data Records (geophysical units or level2)

There are two kinds of data processing and distribution:

- **Real-time processing and distribution** (EUMETSAT and ISRO/NRSC)

The operational geophysical data record (OGDR) is available with a latency of 3-5 hours. Note that this is a non-validated product that uses orbits computed by the on-board DORIS Navigator (DIODE) and that does not contain all the environmental/geophysical corrections such as Mog2D correction (HF ocean dealiasing correction).

- **Delayed-mode processing and distribution** (CNES and ISRO/SAC)

The interim geophysical data record (IGDR) is available per pass with a latency of less than 1.5 days. Note that this is not a fully validated product, although it uses a preliminary orbit and includes all the environmental/geophysical corrections (preliminary for some of them). This product is generated by CNES only.

The geophysical data record (GDR) is a fully validated product that uses a precise orbit and the best environmental/geophysical corrections. This product is available per repeat cycle with a latency of 40 days. Validation is performed by CNES teams to ensure in depth validation. GDR products are generated both by CNES and ISRO/SAC.

Geophysical data records are disseminated to users as they become available, as well as ingested in two main archives (at CNES and ISRO), ISRO being in charge of data dissemination to Indian community and CNES to the rest of the scientific community.

The NRT and offline data are provided through different sources and means as discussed below. Note that the telemetry acquisition strategy, designed to minimize the risk of science data loss, sometimes results in files containing data which overlaps in time. The NRT ground processing does not remove these overlaps, so it is possible to encounter two or more OGDR products which have overlapping start and stop sensing times. CNES-EUMETSAT-ISRO centers are disseminating SARAL/AltiKa products according to the interagency agreement.

- **CNES via AVISO data service:** <http://www.aviso.oceanobs.com> (new address in Feb.2014: <http://www.aviso.altimetry.fr>)

“Archiving, Validation and Interpretation of Satellite Oceanographic data” is the French multi-satellite data distribution center dedicated to space oceanography, developed by CNES.

AVISO distributes and archives SARAL/AltiKa delayed-time data (IGDR, GDR).

- **EUMETSAT:** <http://www.eumetsat.int>

EUMETSAT is the European Organisation for the Exploitation of Meteorological Satellites. Its role is to deliver weather and climate-related satellite data, images and products- 24 hours a day, 365 days a year.



---

EUMETSAT distributes operational data (OGDR).

- ISRO: <http://www.isro.org>

The objective of ISRO is to develop space technology and its application to various national tasks.

ISRO distributes (at national level) operational data (OGDR) and archives and disseminates delayed-time data (GDR).

### 2.7.1. Access to NRT data

The OGDR and OGDR-SSHA files are produced at ISRO and EUMETSAT. OGDR-BUFR files are produced at EUMETSAT.

Telemetry data downlinked to CNES's polar X-band ground stations at Kiruna (Sweden) and Inuvik (Canada) are used to produce OGDR products.

In near real time, ISRO disseminates the complete set of OGDR files via ftp and EUMETSAT disseminates the complete set of OGDR files on EUMETCast. The complete set of OGDR files consists of OGDR, OGDR-SSHA and OGDR-BUFR.

The OGDR-BUFR data are additionally available in near real-time from the Global Telecommunications System (GTS).

Details on data dissemination services from ISRO and EUMETSAT agencies are described below.

Note that, for user convenience, CNES distributes OGDR products (native and reduced) from EUM on its AVISO ftp server. CNES declines any responsibility in case of products latency or gaps happening on the ftp server.

### 2.7.2. Access to off-line data

The IGDR families are produced solely by CNES while GDR families are produced by CNES and ISRO. They are available for French and foreign users on the AVISO ftp server (<http://www.aviso.oceanobs.com>, <http://www.aviso.altimetry.fr> from Feb. 2014). For Indian users, off line GDR products are available on MOSDAC (<http://www.mosdac.gov.in/login.jsp>). Both of these archival facilities also provide a variety of auxiliary files used to produce the O/I/GDR datasets, and ISRO also provides the OGDR family of datasets.

Data dissemination services from ISRO and CNES agencies are described below.

### 2.7.3. Documentation and Sample Reader Software

This SARAL/AltiKa User's Handbook document describes only the native product format. A description of the O/I/GDR product format and contents is provided in the CNES document "SALP-ST-M-EA-15839-CN: SALP Products Specification - Volume 20 : AltiKa / SARAL User Products" (see RD 4). All documents are available through the data dissemination services.

Tools such as sample reading routines in Fortran-90, C, and IDL are also available through the data dissemination services on the AVISO website and on **the ISRO website (TBC by ISRO)**. The toolbox BRAT is also recommended to read and study AltiKa data (see 6.4.3).

A BUFR reading software library can be obtained from:  
<http://www.ecmwf.int/products/data/software/bufr.html>

---

## 2.8. Access to data via ISRO

### 2.8.1. Access to NRT data

**TBD by ISRO**



## 2.8.2. Access to off line data

TBD by ISRO

## 2.9. Access to data via EUMETSAT

### 2.9.1. NRT data access

Operational users requiring near real-time access (within a few hours of acquisition) can receive data via EUMETCast, which is the prime dissemination mechanism for EUMETSAT satellite data and meteorological products. EUMETCast is also used to deliver data supplied by several external data providers.

EUMETCast is an environmental data and product dissemination system based on standard Digital Video Broadcast (DVB) technology. It uses commercial telecommunication geostationary satellites to broadcast data and products to a wide user community. EUMETSAT operates three EUMETCast broadcasts: EUMETCast Europe in Ku-band via Hotbird-6 EUMETCast Africa in C-band via AtlanticBird-3 and EUMETCast South America in C-band via NewSkies-806. The coverage zones of these broadcasts are shown in Figure below. The SARAL/AltiKa products are currently disseminated over all beams.

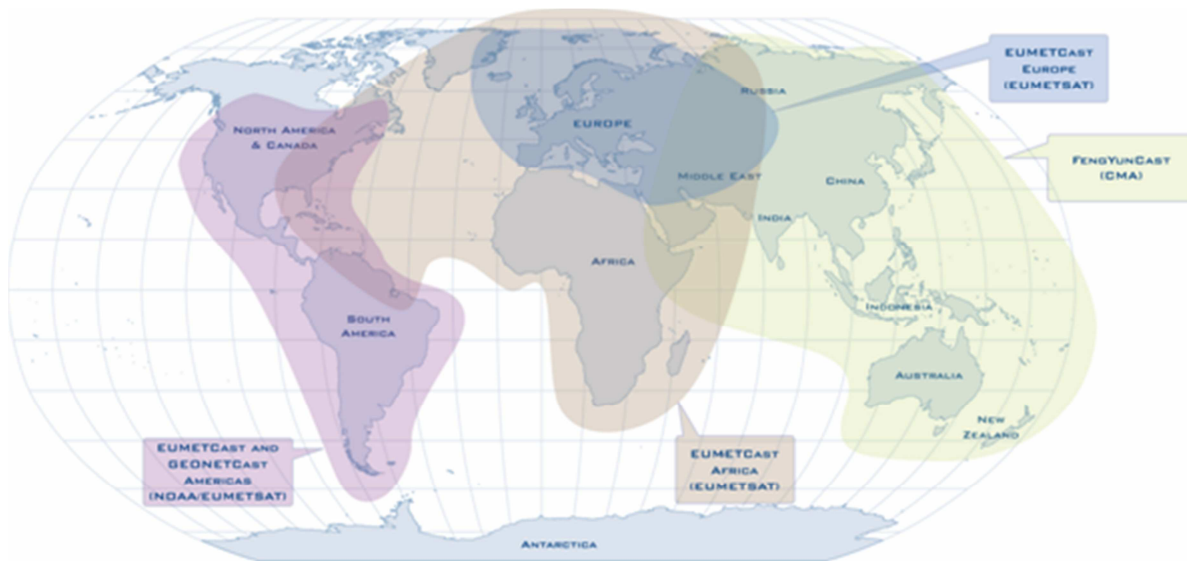


Figure 11 : GEONETCast Coverage Zones

EUMETCast is part of a wider data dissemination cooperation network known as GEONETCast, defined as a global network of satellite based data dissemination systems providing environmental data to a world-wide user community. The current partners within the GEONETCast initiative include the National Oceanic and Atmospheric Administration (NOAA), the World Meteorological Organization (WMO) and EUMETSAT, as well as many prospective data provider partners.

EUMETCast is a multi-service dissemination mechanism and other environmental data streams and products are also delivered via EUMETCast :

- Space-based observations from the Meteosat, Metop, GOES, MT-SAT and FY2 satellites - at their most frequent, these data are delivered to Users within 5-minutes of processing
- MODIS level 1 and 2 products covering selective geographical regions



- 
- Numerical Weather Forecasts
  - In-situ observational data
  - Land application products covering Europe, Africa and South America
  - Marine meteorological and ocean surface products covering the Atlantic, Mediterranean Sea and Yellow Sea
  - Atmospheric chemistry products

EUMETCast has an installed user base of over 2500 stations worldwide.

A typical EUMETCast reception station comprises a standard PC with DVB card inserted and a satellite off-set antenna fitted with a digital universal V/H LNB. All components of the reception station are commercially available. The hardware costs for a single PC station for EUMETCast Europe (Ku-band) reception start at around €1,500. In addition, EUMETCast Client Software package is required for handling the incoming DVB and storing it as data files. This package is available directly from EUMETSAT at a one of fee of €100 and forms part of any registration process.

Further information on EUMETCast can be found on the EUMETSAT Web site at:

[http://www.eumetsat.int/Home/Main/What\\_We\\_Do/EUMETCast/index.htm](http://www.eumetsat.int/Home/Main/What_We_Do/EUMETCast/index.htm) or alternatively follow the links to 'What We Do'-'EUMETCast'. Note that the coverage of EUMETCast is achieved through different beams, and the user location will determine the technical requirements of the EUMETCast reception station equipment.

The SARAL/AltiKa products available via EUMETCast are the EUMETSAT and ISRO injected OGDR, OGDR-SSHA and OGDR-BUFR. To access these on EUMETCast, users are requested to register online via the EUMETSAT Web site, or to contact the EUMETSAT User Service Helpdesk. As for Jason-2 near real-time products, already disseminated by EUMETSAT via EUMETCast, the SARAL/AltiKa products will be disseminated on all EUMETCast channels (Europe, Americas and Africa).

All enquiries related to EUMETCast can be addressed to the EUMETSAT User Helpdesk, email [ops@eumetsat.int](mailto:ops@eumetsat.int), who will be happy to assist with information on reception station manufacturers, reception station setup and data access registration to the SARAL/AltiKa service, or indeed to other near real-time EUMETSAT data services.

## 2.9.2. Access to archived data

The SARAL/AltiKa products generated and distributed by EUMETSAT in near real-time (i.e., OGDR, OGDR-SSHA and OGDR-BUFR) are also archived in the multi-mission EUMETSAT Archive. Any user can access SARAL/AltiKa data from the EUMETSAT archive upon registration. Information on registration, the archive itself and how to use it can be found at <http://archive.eumetsat.org/umarf> or follow the links to 'Access to Data' and then 'Archive Service'. Data delivery media include, among others, direct ftp push to a provided IP address, including the possibility of establishing standing orders, or download by the user from an html page. Note however that this is not a near real-time data access, but that it can take up to several hours and occasionally even days to get the data.

## 2.10. Access to data on GTS

---

### 2.10.1.1. GTS access for OGDR-BUFR files

All of the OGDR-BUFR data, injected by EUMETSAT, will appear on the World Meteorological Organization's GTS network. End users with a GTS presence (typically large meteorological agencies) can retrieve the data by keying on the WMO/GTS headers specific to the SARAL/AltiKa data: 'ISZX02 EUMS' for EUMETSAT OGDR-BUFR files. The original files are comprised of approximately 15 minute BUFR 'messages' which will appear separately on the GTS.





---

## 2.11. CNES data distribution

---

### 2.11.1. Details of off line data access via CNES

Users have access to SARAL/AltiKa public data through a dedicated AVISO ftp server with an anonymous account (nevertheless, please note that users shall be registered before downloading products in order to be identified by AVISO helpdesk and to receive altimetric news. Registration form is available at: <http://www.aviso.oceanobs.com/en/data/registration-form/>). The address will become: <http://www.aviso.altimetry.fr/en/data/registration-form/> after Feb.2014.

Off line IGDR and GDR products are available on the following server:

- IP address / server name : avisoftp.cnes.fr
- User account : anonymous
- Home directory : /AVISO/pub/saral

With the following ftp server directory tree:

documentation	→	directory containing product spec, product handbook, reading tools, ...
ogdr_t <sup>3</sup>	→	directory containing OGDR native products
ssha_ogdr_t	→	directory containing OGDR reduced products
igdr_t	→	directory containing IGDR native products (with a sub directory for each cycle and sub directory containing the latest data)
sigdr_t	→	directory containing S-IGDR (with a unique sub directory containing the latest data)
ssha_igdr_t	→	directory containing IGDR reduced products (with a sub directory for each cycle and a sub directory containing the latest data)
gdr_t_p2	→	directory containing GDR native products (with a sub directory for each cycle)
sgdr_t	→	directory containing S-GDR (with a sub directory for each cycle)
ssha_gdr_t	→	directory containing GDR reduced products (with a sub directory for each cycle)
gdr_t_validation_report	→	directory containing GDR validation reports

For any questions on SARAL/AltiKa data dissemination on AVISO servers please contact the user helpdesk: [aviso@oceanobs.com](mailto:aviso@oceanobs.com) (the user helpdesk e-mail will be [aviso@altimetry.fr](mailto:aviso@altimetry.fr) after Feb.2014)

## 3. Product evolution history

---

<sup>3</sup> « \_t » stands for “test version” when products are disseminated during commissioning phase.





### 3.1. Models and Standards History

The version of the data produced during the Cal/Val phase of the mission is identified by the version letter “T” in the name of the data products. This “T” calibration/validation version will be extensively validated by PIs during the verification phase.

The current product version adopts models and standards that are consistent with version “d” of the Jason-1 and Jason-2 (I)GDR products (see RD 1).

The table below summarizes the models and standards that are adopted in this version of the SARAL/AltiKa (O)(I)GDRs.

Model	Product Version “T” and “d”
Orbit	Based on Doris on-board navigator solution for OGDRS. DORIS tracking data for IGDRs DORIS+SLR tracking data for GDRs.
Altimeter Retracking	<p><u>“Ocean” retracking</u> MLE4 fit from 2<sup>nd</sup> order Brown analytical model : MLE4 simultaneously retrieves the 4 parameters that can be inverted from the altimeter waveforms:</p> <ul style="list-style-type: none"> <li>- Epoch (tracker range offset) ⇒ altimeter range</li> <li>- Composite Sigma ⇒ SWH</li> <li>- Amplitude ⇒ Sigma0</li> <li>- Square of mispointing angle</li> </ul> <p><u>“Ice 1” retracking</u> Geometrical analysis of the altimeter waveforms, which retrieves the following parameters:</p> <ul style="list-style-type: none"> <li>- Epoch (tracker range offset) ⇒ altimeter range</li> <li>- Amplitude ⇒ Sigma0</li> </ul> <p><u>“Ice 2” retracking</u> The aim of the ice2 retracking algorithm is to make the measured waveform coincide with a return power model, according to Least Square estimators. Retrieval of the following parameters:</p> <ul style="list-style-type: none"> <li>- Epoch ⇒ altimeter range</li> <li>- Width of the leading edge</li> <li>- Amplitude ⇒ Sigma0</li> <li>- Slope of the logarithm of the waveform at the trailing edge ⇒ Mispointing angle</li> <li>- the thermal noise level (to be removed from the waveform samples)</li> </ul> <p><u>“Sea Ice” retracking</u> In this algorithm, waveform parameterisation based on peak threshold retracking is applied to the Ka-band waveform. From this parameterisation, a tracking offset and backscatter estimate are determined. Tests are made on the extent of the tracking offset, and extreme values are flagged as retracking failures. The sea-ice waveform amplitude is determined by finding the maximum value of the waveform samples and the tracking offset is determined by finding the point on the waveform (by interpolation) where the waveform amplitude exceeds a threshold determined from the above sea-ice amplitude. A tracking offset is determined. The Centre Of</p>



Model	Product Version "T" and "d"
	Gravity offset correction must be included in the range measurement as the correction is not available separately in the L2 product. <ul style="list-style-type: none"> <li>- Amplitude <math>\Rightarrow</math> Sigma0</li> <li>- Tracking offset <math>\Rightarrow</math> altimeter range</li> <li>- Centre Of Gravity offset correction <math>\Rightarrow</math> correction to altimeter range measurement</li> </ul> <p style="color: #00b050;">N.B.: Please note that ice1 and sea ice retrackings have been lightly validated and that these algorithms should be tuned to Ka-band.</p>
Altimeter Instrument Corrections	Consistent with MLE4 retracking algorithm
SARAL/AltiKa Radiometer Parameters	Wet troposphere range correction from AltiKa radiometer is based on the brightness temperatures measured and a neural network"
Dry Troposphere Range Correction	From ECMWF atmospheric pressures and model for S1 and S2 atmospheric tides
Wet Troposphere Range Correction from Model	From ECMWF model
Ionosphere correction	Based on Global Ionosphere TEC Maps from JPL
Sea State Bias	Empirical solution fitted on 6 months of SARAL GDR_C data (from NOAA Laboratory for Satellite Altimetry)
Mean Sea Surface	MSS_CNES-CLS11
Mean Dynamic Topography	MDT_CNES-CLS09
Geoid	EGM96
Bathymetry Model	DTM2000.1
Inverse Barometer Correction	Computed from ECMWF atmospheric pressures after removing S1 and S2 atmospheric tides
Non-tidal High-frequency Dealiasing Correction	Mog2D High Resolution ocean model on (I)GDRs. None for OGDRs. Ocean model forced by ECMWF atmospheric pressures after removing S1 and S2 atmospheric tides
Tide Solution 1	GOT4.8 (from GSFC)
Tide Solution 2	FES2012 (from LEGOS/NOVELTIS/CNES/CLS)
Equilibrium long-period ocean tide model	From tidal potential of "Cartwright and Edden [1973] Corrected tables of tidal harmonics - J. Geophys. J. R. Astr. Soc., 33, 253-264." ;
Non-equilibrium long-period ocean tide model	Mm, Mf, Mtm, and Ssa from FES2012
Solid Earth Tide Model	From tidal potential of "Cartwright and Edden [1973] Corrected tables of tidal harmonics - J. Geophys. J. R. Astr. Soc., 33, 253-264." ;
Pole Tide Model	Equilibrium model
Wind Speed from Model	ECMWF model
Altimeter Wind Speed Model	One-dimensional model, as a function of backscatter, tuned to AltiKa's backscatter measurements. John Lillibridge and co [2013] - One and Two-Dimensional Wind Speed Models for Ka-band Altimetry - JTECH-D-13-00167.1
Trailing edge variation Flag	Derived from Matching Pursuit algorithm (from J. Tournadre, IFREMER)
Ice Flag	Derived from comparison of the model wet tropospheric correction to a dual-frequency wet tropospheric correction retrieved from radiometer brightness temperatures, with a default value issued from a climatology table

Table 11 : Models and standards



### 3.2. Models and Editing on Version "d" Products

#### 3.2.1. Orbit models

SARAL/AltiKa orbit standards are based on Jason-2 GDR-D standards.

Those are summarized below, the previous standard used on Jason-1/Jason-2 and ENVISAT missions (GDR\_C) is also recalled :

	GDR-C	GDR-D
<b>Gravity model</b>	<p>EIGEN-GL04S-ANNUAL (2008)</p> <p>Non-tidal TVG : drifts in degree 2,3,4 zonal coeffs, C21/S21; Annual and semi-annual terms up to deg/ord 50</p> <p>Solid Earth Tides: from IERS2003 conventions</p> <p>Ocean tides FES2004</p> <p>Atmospheric gravity : 6hr NCEP pressure fields + tides from Horwitz-Cowley model</p> <p>Pole Tide: solid Earth and ocean from IERS2003 conventions</p> <p>Third bodies: Sun, Moon, Venus, Mars and Jupiter</p>	<p>EIGEN-GRGS_RL02bis_MEAN-FIELD (2011)</p> <p>Non-tidal TVG : Annual, Semi-annual, and drifts up to deg/ord 50</p> <p>Solid Earth Tides: from IERS2003 conventions</p> <p>Ocean tides FES2004</p> <p>Atmospheric gravity : 6hr NCEP pressure fields + tides from Biancale-Bode model</p> <p>Pole Tide: solid Earth and ocean from IERS2010 conventions</p> <p>Third bodies: Sun, Moon, Venus, Mars and Jupiter</p>
<b>Surface forces</b>	<p>Radiation Pressure model: thermo-optical coefficient from pre-launch box and wing model, with smoothed Earth shadow model</p> <p>Earth Radiation : Knocke-Ries albedo and IR satellite model</p> <p>Atmospheric density model : DTM-94 for Jason, and MSIS-86 for Envisat</p>	<p>Unchanged</p>
<b>Estimated dynamical parameters</b>	<p>Drag coefficient every 2 or 3 revolutions</p> <p>Along-track and Cross-track 1/rev per day or every 12 hours</p>	<p>Unchanged</p>
<b>Satellite reference</b>	<p>Mass and Center of gravity: Post-Launch values + variations generated by Control Center</p> <p>Attitude Model :</p> <p>For Jason-1 and Jason-2 : Quaternions and Solar Panel orientation from control center, completed by nominal yaw steering law when necessary</p> <p>For Envisat: nominal attitude law</p>	<p>Unchanged</p>
<b>Displacement of reference points</b>	<p>Earth tides: IERS2003 conventions</p> <p>Ocean Loading: FES2004</p> <p>Pole tide : solid earth pole tides</p> <p>(Pole tide and ocean loading applied to both SLR stations and DORIS beacons)</p> <p>Reference GPS constellation: JPL solution</p>	<p>Earth tides: IERS2003 conventions</p> <p>Ocean Loading: FES2004</p> <p>Pole tide : solid earth pole tides</p> <p>(Pole tide and ocean loading applied to both SLR stations and DORIS beacons)</p> <p>Reference GPS constellation: JPL solution</p>



	GDR-C	GDR-D
	at IGS (orbits and clocks) , consistent with IGS05; before GPS week 1400, JPL solution has been aligned with IGS05; IGS00 clocks are unchanged	at IGS (orbits and clocks) - <b>fully consistent with IGS08</b>
<b>Terrestrial Reference Frame</b>	Extended ITRF2005 (SLRF/LPOD2005, DPOD2005, IGS05)	<b>Extended ITRF2008 (SLRF/ITRF2008, DPOD2008, IGS08)</b>
<b>Earth orientation</b>	Consistent with IERS2003 conventions and ITRF2005	<b>Consistent with IERS2010 conventions and ITRF2008</b>
<b>Propagations delays</b>	SLR Troposphere correction: Mendes-Pavlis SLR range correction: constant 5.0 cm range correction for Envisat, elevation dependent range correction for Jason DORIS Troposphere correction : CNET model GPS PCO/PCV (Emitter and Receiver) consistent with constellation orbits and clocks (IGS05 Antex after GPS week 1400) GPS : Phase wind-up correction	SLR Troposphere correction: Mendes-Pavlis SLR range correction: constant 5.0 cm range correction for Envisat, elevation dependent range correction for Jason <b>DORIS Troposphere correction : GPT/GMF model</b> GPS PCO/PCV (Emitter and Receiver) consistent with constellation orbits and clocks ( <b>IGS08 Antex</b> ) GPS : Phase wind-up correction
<b>Estimated measurement parameters</b>	DORIS: 1 Frequency bias per pass, 1 troposphere zenith bias per pass SLR : bias per arc solved for a few stations, bias per pass for a few stations GPS: Floating ambiguity per pass, receiver clock adjusted per epoch	Unchanged
<b>Tracking Data corrections</b>	Jason-1 Doris data: South Atlantic Anomaly Model (JM Lemoine et al.) applied before and after DORIS instrument change DORIS datation bias for Envisat and Jason aligned with SLR before and after instrument change	Unchanged
<b>Doris Weight</b>	1.5 mm/s (1.5 cm over 10 sec) For Jason-1 , Doris Weight is reduced by a factor 10 before Doris instrument change	Unchanged
<b>SLR Weight</b>	10 cm	<b>15 cm</b>
<b>GPS Weight</b>	10 cm (phase) / 10 m (code)	<b>2 cm (phase) / 2 m (code)</b>

**Table 12 : GDR-C/GDR-D orbit standard**




### 3.2.2. Mean Sea Surface

The MSS\_CNES-CLS11 model is computed from 16 years of satellite altimetry data from a variety of missions. Its main characteristics are the following :

<b>Name</b>	MSS_CNES-CLS11
<b>Reference ellipsoid</b>	T/P
<b>Referencing time period</b>	1993-2009 (16 years)
<b>Spatial coverage</b>	Global (80°S to 84°N) - Oceanwide where altimetric data are available. EIGEN_GRACE_5C geoid elsewhere and on continents.
<b>Spatial resolution</b>	Regular grid with a 1/30° (2 minutes) spacing (i.e. ~4 km)
<b>Grid</b>	10801 points in longitude / 4921 points in latitude
<b>MSS determination technique</b>	Local least square collocation method on a 6' grid where altimetric data in a 200-km radius are selected. Estimation on a 2' grid based on SSH-geoid values (remove/restore technique to recover the full signal). The inverse method uses local anisotropic covariance functions that witness the MSS wavelength content.
<b>Estimation error level</b>	YES (in cm) - The Optimal Interpolation method provides a calibrated formal error
<b>Altimetric dataset</b>	T/P 10 years mean profile (first orbit), T/P tandem 3 years profile ERS-2 8 years mean profile, 1 year ERS-1 (geodetic phase) GFO, 7 years mean profile Jason-1, 7 years mean profile Envisat, 7 years mean profile

**Table 13 : MSS\_CNES-CLS11 model characteristics**

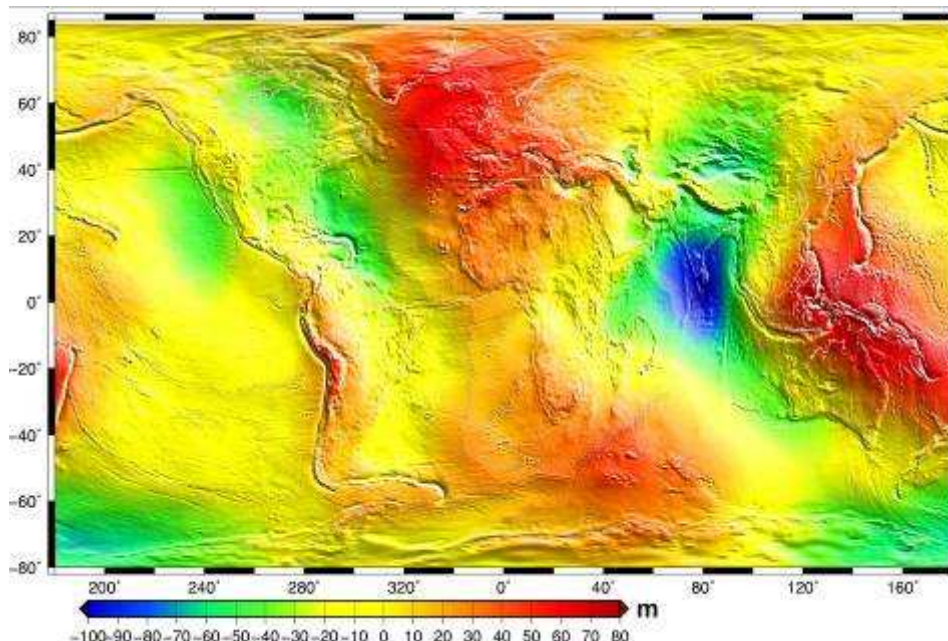

**Figure 13 : Mean Sea Surface MSS\_CNES-CLS11.**

Refer to <http://www.aviso.oceanobs.com/en/data/products/auxiliary-products/mss/index.html> for more details on this model (after Feb. 2014: <http://www.aviso.altimetry.fr/en/data/products/auxiliary-products/mss/index.html>)

### 3.2.3. Mean Dynamic Topography

The MDT\_CNES-CLS09 model is computed from satellite altimetry data from a variety of missions. Its main characteristics are the following :





Name	MDT_CNES-CLS09
Referencing time period	1993-1999 (7 years)
Domain	Global (78.25°S to 81.25°N)
Spatial resolution	Regular grid with a 1/4° (15 minutes) spacing (i.e. ~30 km)
Grid	720 points in longitudes / 320 points in latitude
MDT determination technique	Reference of the altimeter Sea Level Anomalies, computed relative to a 7 years (1993-1999) mean profile, in order to obtain absolute measurements of the ocean dynamic topography. Combined product based on 4.5 years of GRACE data, 15 years of altimetry and in situ data (hydrologic and drifters data)

Table 14 : MDT\_CNES-CLS09 model characteristics

This sea surface height (mean sea surface height above geoid) corresponds to mean geostrophic currents and its changes.

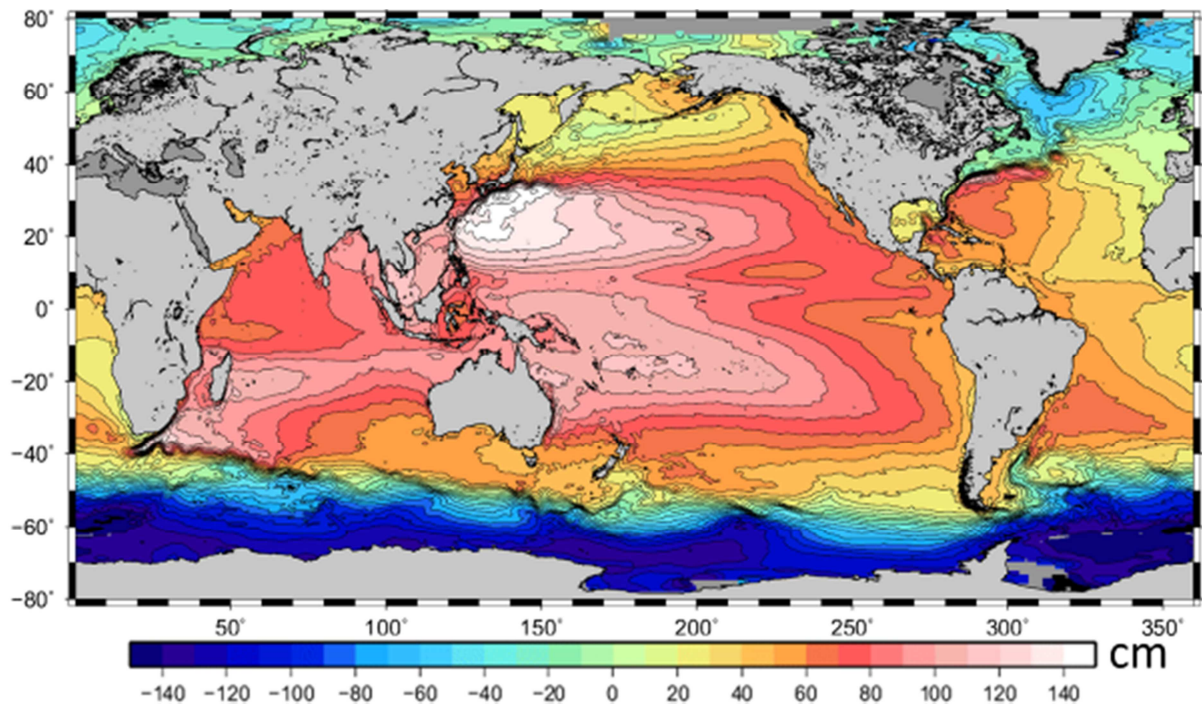


Figure 14 : Mean Dynamic Topography MDT\_CNES-CLS09

Refer to <http://www.aviso.oceanobs.com/en/data/products/auxiliary-products/mdt/index.html> for more details on this model.

### 3.2.4. Geoid

SARAL/AltiKa (O)(I)GDRs use the EGM96 geopotential to compute the geoid [Lemoine et al., 1998]. The EGM96 geopotential model has been used to calculate point values of geoid undulation on a 0.25 x 0.25 degree grid that spans the latitude range +85.0 deg. to -85.0 deg. The EGM96 model is complete to spherical harmonic degree and order 360, and has been corrected appropriately so as to refer to the mean tide system as far as the permanent tide is concerned [Rapp et al., 1991]. The  $k_2$  Love number used in this conversion was 0.3. The geoid undulations are given with respect to an ideal geocentric mean Earth ellipsoid, whose semi-major axis remains undefined (i.e., there is no zero-degree term in the spherical harmonic series of these geoid undulations). The flattening of this reference ellipsoid is  $f=1/298.257$  so that values are consistent with constants adopted for T/P.



Since the geoid undulations have been computed from an expansion to degree 360, the resolution of the undulations will be on the order of 50km. Data used to derived the EGM96 model include surface gravity data from different regions of the globe, altimeter derived gravity anomalies from the GEOSAT Geodetic Mission, altimeter derived gravity anomalies from ERS-1, direct satellite altimetry from T/P, ERS-1 and GEOSAT, and satellite tracking to over 20 satellites using satellite laser ranging, GPS, DORIS, the Tracking and Data Relay Satellite System (TDRSS), and TRANET.

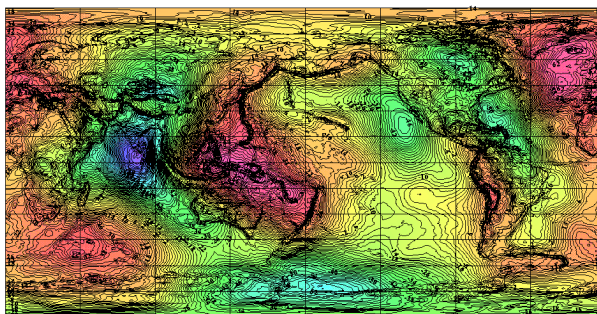


Figure 15 : EGM96 geoid

More information on EGM96 can be found at <http://cddisa.gsfc.nasa.gov/926/egm96/egm96.html>

### 3.2.5. Bathymetry

The value of this parameter is determined from the DTM2000.1 model from N. Pavlis and J. Saleh [personal communication, 2000] of the Raytheon ITSS/Goddard Space Flight Center. The model is provided globally with a 2' resolution. The heritage of DTM2000.1 goes back to the OSUJAN98 database [Pavlis and Rapp, 1990] and the JGP95E database [Chapter 2 of Lemoine et al., 1998]. The bathymetric information in DTM2000.1 (originating from Smith and Sandwell's [1994] global sea floor topography) has significant differences with the ETOPO5 bathymetric model. The mean and standard deviation of these differences is 10 m and 270 m, respectively.

### 3.2.6. Ocean Tides

The two geocentric tide values provided on the SARAL/AltiKa (O)(I)GDR, ocean\_tide\_sol1 and ocean\_tide\_sol2, are computed with diurnal and semidiurnal ocean and load tide values predicted by the GOT4.8 and FES2012 models, respectively.

Both geocentric ocean tide fields (ocean\_tide\_sol1 and ocean\_tide\_sol2) also include the load tides from load\_tide\_sol1 and load\_tide\_sol2 fields, and the equilibrium long-period ocean tide (ocean\_tide\_equil). Note that the two load tide fields (load\_tide\_sol1 and load\_tide\_sol2) include the load tides from the GOT4.8 model as no loading tide is available for FES2012 tidal model. The GOT4.8 model includes the M4 non-linear ocean tide and FES2012 includes several non-linear waves : M4, M6, M8, MN4, MS4, MKS2, N4, S4, MSf.

Both models are interpolated to provide the geocentric ocean and load tides at the location of the altimeter measurement, and an interpolation quality flag is provided on the (O)(I)GDRs to indicate the quality of this interpolation (see interp\_flag\_ocean\_tide\_sol1 and interp\_flag\_ocean\_tide\_sol2).

#### 3.2.6.1. GOT4.8 Ocean Tide Model

Solution GOT4.8 [Ray 1999; Ray, personal communication], is the last version of GOT models developed by R. Ray.

This model is identical to 4.7 in all constituents except S2.

GOT4.7 used the following data:

- 364 cycles of T/P





- 
- 114 cycles of T/P on the interlaced orbit
  - 117 cycles of ERS1 and ERS2
  - 126 cycles of GFO

None Jason data has been used in this solution.

The solution consists of independent near-global estimates of 10 constituents (K1, K2, M2, M4, N2, O1, P1, Q1, S1, S2). An a priori model was used that consisted of the hydrodynamic model FES 2004 [Lyard et al. 2006], and several other local hydrodynamic models, GOT4.8 implement the fixed-up dry troposphere correction for TP where the air tide wasn't being handled correctly (whereas it is in Jason GDRs), and this affects S2 mostly.

Another difference between GOT4.7 and GOT4.8 is that 4.7 had not applied the TP Cg correction, while 4.8 did use the Cg.



---

### 3.2.6.2. FES2012 Ocean Tide Model

FES2012 is the last version of the FES (Finite Element Solution) tide model developed in 2012. It is a fully revised version of the global hydrodynamic tide solutions initiated by the works of Christian Le Provost in the early nineties. The new model has been developed, implemented and validated by the LEGOS, NOVELTIS and CLS, within a CNES funded project.

FES2012 takes advantage of longer altimeter time series, improved modelling and data assimilation techniques, and more accurate ocean bathymetry. Special efforts have been dedicated to address the major non-linear tides issue and to the determination of accurate tidal currents.

FES2012 is based on the resolution of the tidal barotropic equations (T-UGO model) in a spectral configuration.

A new original high resolution global bathymetry was built, and a new global finite element grid (~1.5 million nodes) is used leading to a twice more accurate 'free' solution (independent of in situ and remote-sensing data) than the FES2004 version. Then the accuracy of this 'free' solution was improved by assimilating long-term altimetry data (Topex/ Poseidon, Jason-1, Jason-2, ERS-1, ERS-2 and ENVISAT) through an improved representer assimilation method. Final FES2012 solution shows strong improvement compared to FES2004 and GOT4V8, particularly in coastal and shelf regions and although none tidal gauge has been assimilated.

See <http://www.avisioceanobs.com/en/data/products/auxiliary-products/global-tide-fes2004-fes99/description-fes2012.html> (after Feb. 2014: <http://www.avisioceanobs.com/en/data/products/auxiliary-products/global-tide-fes2004-fes99/description-fes2012.html>).

### 3.2.7. Sea Surface Height Bias Recommendation

The estimate of the absolute bias in the SARAL/AltiKa sea-surface height measurements (SSH) is one of the goals of the Cal/Val phase and is therefore not fully consolidated at this time.

The Sea State Bias (SSB) can be defined as the difference between the apparent sea level as "seen" by the altimeter and the actual mean sea level. It is composed of: the Electromagnetic bias (EMB), and skewness and tracker biases that affect the accuracy of altimeter measurements and are all dependent on SWH. The EMB (main contributor) results from the fact that the radar senses an average sea surface lower than the true average sea surface, due to amplification from wave troughs. This bias can be expressed as a percentage of SWH, with the percentage being a complex function of the sea-surface slope and elevation statistical distribution.

A consolidated SSB solution is available to interpolate the SSB value bilinearly from a table (empirical model derived from analyses of the altimeter data) as a function of SWH and wind speed.

It should be noted that the bias reflects the combination of the mean errors from all of the corrections that are used to compute sea surface height.



### 3.2.8. Data Editing Criteria

The following editing criteria are a recommended guideline for finding good records from the (O)(I)GDR version “d” to calculate the sea level anomaly from the Ku band range. The user should review these criteria before using them and may wish to modify them!

First, check the following conditions to retain only ocean data and remove any bad, missing, or flagged data:

Parameter	Value	Meaning
surface_type	0	Open oceans or semi-enclosed seas
ice_flag	0	Use with caution in current product version

Table 15 : Recommended editing criteria

Then, filter the data as follows to retain only the most valid data :

Parameter	Validity conditions
range_numval	$20 \leq x$
range_rms	$0 \leq x \text{ (mm)} \leq 200$
altitude - range	$-130\ 000 \leq x \text{ (mm)} \leq 100\ 000$
model_dry_tropo_corr	$-2\ 500 \leq x \text{ (mm)} \leq -1\ 900$
rad_wet_tropo_corr	$-500 \leq x \text{ (mm)} \leq -20$
iono_corr_alt	$-100 \leq x \text{ (mm)} \leq 40$
sea_state_bias	$-500 \leq x \text{ (mm)} \leq 0$
ocean_tide_sol1	$-5\ 000 \leq x \text{ (mm)} \leq 5\ 000$
solid_earth_tide	$-1\ 000 \leq x \text{ (mm)} \leq 1\ 000$
pole_tide	$-150 \leq x \text{ (mm)} \leq 150$
swh	$0 \leq x \text{ (mm)} \leq 11\ 000$
sig0	$3 \leq x \text{ (dB)} \leq 30$
wind_speed_alt	$0 \leq x \text{ (m/s)} \leq 30$
off_nadir_angle_wf	$-0.2 \leq x \text{ (deg}^2\text{)} \leq 0.64$
sig0_rms	$x \text{ (dB)} \leq 1$
sig0_numval	$20 < x$

Table 16 : Recommended filtering criteria

To restrict studies to deep water, apply a limit, e.g., water depth of 1000m or greater, using the bathymetry parameter (ocean depth in meters.)

These data editing criteria are valid for open ocean studies only. Recommendations for the use of SARAL/AltiKa data in coastal and hydrological areas may be provided to users later.



## 4. Using the (O)(I)GDR data

### 4.1. Overview

This section gives the reader a guide to the use of the SARAL/AltiKa (O)(I)GDR data. While this handbook tries to be correct and complete, note that nothing can replace the information to be gained at conferences and other meetings from those using these data. The reader must proceed with caution and at his or her own risk. Further information is also available on the web servers provided in Annex C, please direct questions and comments to the contacts given there.

The instruments on SARAL/AltiKa make direct observations of the following quantities: altimeter range, ocean significant wave height, ocean radar backscatter cross-section (which can be related to wind speed) and tropospheric water content. Ground based laser station and DORIS station measurements of the satellite location and speeds are used in precision orbit determination (POD). All of these measurements are useful in themselves, but they are made primarily to derive the sea surface height with the highest possible accuracy. Such a computation also needs external data (not collected aboard SARAL/AltiKa), e.g., atmospheric pressure, etc. In addition, instrument health and calibration data are collected onboard and used to make corrections to the main measurements and to monitor the instrument stability in the long term.

This (O)(I)GDR contains all relevant corrections needed to calculate the sea surface height (the calculation of SSHA has already been done in reduced dataset). For the other "geophysical variables" in the (O)(I)GDR: ocean significant wave height, tropospheric water content and wind speed, the needed instrument and atmospheric corrections have already been applied.

The following sections explain the rationale for how the corrections should be applied.

### 4.2. Typical computation from altimetry data

In this section references are made to specific (O)(I)GDR parameters by name using the name of the variable as described in the NetCDF data sets.

#### WARNING

Default values are given to data when computed values are not available (See section 6.1.2.4) so you must screen parameters to avoid using those with default values. Also you must check flag values. The related flags are given in the description of each variable (See section 6.1.2.4) although some discussion of flags appears in this section.

#### 4.2.1. Corrected Altimeter Range

The main data of the (O)(I)GDR are the altimeter ranges. The (O)(I)GDR provides ranges measured at Ka band. The given range is corrected for instrumental effects (`net_instr_corr_range_ka`). The given range must be corrected for path delay in the atmosphere through which the radar pulse passes and the nature of the reflecting sea surface. All range corrections are defined and they should be ADDED to the range. The corrected (Ka band) range is given by :

$$\begin{aligned} \text{Corrected Range} = & \text{Range} + \text{Wet Troposphere Correction} \\ & + \text{Dry Troposphere Correction} \\ & + \text{Ionosphere Correction} \\ & + \text{Sea State Bias Correction} \end{aligned}$$

#### Wet Troposphere Correction :

Use radiometer correction (`rad_wet_tropo_corr`).

#### Dry Troposphere Correction :



Use model correction (model\_dry\_tropo\_corr).

#### Ionosphere Correction :

Use model ionosphere correction (iono\_corr\_gim).

#### Sea State Bias Correction :

Use sea state bias correction (sea\_state\_bias).

**N.B:** Please note that range, sig0 and swh are subject to modeled instrumental errors corrections (modeled\_instr\_corr\*). These corrections are given in Look-Up-Tables updated with real measurements instead of ground measurements.

### 4.2.2. Sea Surface Height and Sea Level Anomaly

Sea surface height (SSH) is the height of the sea surface above the reference ellipsoid. It is calculated by subtracting the corrected range from the Altitude:

$$\text{Sea Surface Height} = \text{Altitude} - \text{Corrected Range}$$

The sea level anomaly (SLA), also referred to as Residual Sea Surface, is defined here as the sea surface height minus the mean sea surface and minus known geophysical effects, namely tidal and inverse barometer. It is given by:

$$\begin{aligned} \text{Sea Level Anomaly} = & \text{Sea Surface Height} \\ & - \text{Mean Sea Surface} \\ & - \text{Solid Earth Tide Height} \\ & - \text{Geocentric Ocean Tide Height} \\ & - \text{Pole Tide Height} \\ & - \text{Inverted Barometer Height Correction} \\ & - \text{HF Fluctuations of the Sea Surface Topography} \end{aligned}$$

The SLA contains information about:

- Real changes in ocean topography related to ocean currents
- Dynamic response to atmospheric pressure (after removal of the high frequency aliased part)
- Differences between actual tides and the tide models
- Differences between the mean sea surface model and the true mean sea surface at the SARAL/AltiKa location
- Unmodeled or mismodeled measurement effects (skewness, sea state bias, altimeter errors, tropospheric corrections, ionospheric correction, etc.)
- Orbit errors

There is naturally also random measurement noise. Understanding the first four items as a function of space and time is the purpose of SARAL/AltiKa.

#### Altitude :

Orbit altitude (see parameter altitude)

#### Corrected Range :

See section 4.2.1.

#### Tide effects (solid earth tide height, geocentric ocean tide height, pole tide height) :

See sections 4.2.2.1 and 5.9.

#### Inverted Barometer Height Correction :



Use `inv_bar_corr` (see also section 5.10).

#### HF Fluctuations of the Sea Surface Topography :

Use `hf_fluctuations_corr` (see also section 5.10).

#### Mean Sea Surface :

See sections 4.2.2.2 and 5.4.

#### 4.2.2.1. Tide Effects

The total tide effect on the sea surface height is the sum of three values from the (O)(I)GDR:

$$\text{Tide Effect} = \text{Geocentric Ocean Tide} + \text{Solid Earth Tide} + \text{Pole Tide}$$

(See also section 5.9 and subsections)

#### Geocentric Ocean Tide :

The geocentric ocean tide provided in the (O)(I)GDR is actually the sum total of the ocean tide with respect to the ocean bottom, and the loading tide height of the ocean bottom.

$$\text{Geocentric Ocean Tide} = \text{Ocean Tide} + \text{Load Tide}$$

The (O)(I)GDR provides a choice of two geocentric ocean tide values, `ocean_tide_sol1` and `ocean_tide_sol2`. Each uses a different model for the sum total of the ocean tide and loading tide heights from the diurnal and semidiurnal tides, but both include an equilibrium representation of the long-period ocean tides at all periods except for the zero frequency (permanent tide) term. Note that the (O)(I)GDR also explicitly provides the loading tide height from each of the two models that are used to determine the two geocentric ocean tide values, `load_tide_sol1`, `load_tide_sol2`. Obviously, the geocentric ocean tide values and loading tide values should not be used simultaneously, since the loading tide height would be modeled twice.

#### Solid Earth Tide :

Use `solid_earth_tide`

NOTE: Zero frequency (permanent tide) term also not included in this parameter.

#### Pole Tide :

Use `pole_tide`

The tide values all have the same sign/sense in that positive numbers indicate that the surface is farther from the center of the Earth.

#### 4.2.2.2. Geophysical Surface - Mean Sea Surface or Geoid

The geophysical fields Geoid (geoid) - actually geoid undulation, but called simply geoid - and Mean Sea Surface (`mean_sea_surface`) are distances above the reference ellipsoid, as is the Sea Surface Height. These values are for the location indicated by latitude and longitude. If the values of these fields are needed at a different location within the current frame, along-track interpolation may be done using the high rate (40/second) range and altitude values.

As the geoid is derived from the mean sea surface, the latter is the better-known quantity. The residual surface with respect to the geoid is sometimes called the "dynamic topography" of the ocean surface.

See also discussions of mean sea surface and geoid in sections 5.3 and 5.4.

#### 4.2.3. Mean Sea Surface and Adjustment of the Cross Track Gradient

In order to study sea level changes between two dates, it is necessary to difference sea surface heights from different cycles at the exact same latitude-longitude, so that the not well-known



time-invariant geoid cancels out. However, the (O)(I)GDR samples are not given at the same latitude-longitude on different cycles. They are given approximately every 1 sec along the pass (about 6 km, the time difference and distance vary slightly with satellite height above the surface), and the satellite ground track is allowed to drift by  $\pm 1$  km. This introduces a problem: on different cycles the satellite will sample a different geoid profile. This effect is the so-called cross-track geoid gradient, and *Brenner and Koblinsky* [1990] estimated it at about 2 cm/km over most of the ocean, larger over continental slopes, reaching 20 cm/km at trenches. Even if the passes repeated exactly, one would have to interpolate along the pass (say, to a fixed set of latitudes) because a 3 km mismatch in along pass position would cause approximately a 6 cm difference in the geoid, which would mistakenly be interpreted as a change in oceanographic conditions.

Both problems are simultaneously solved if the quantity one interpolates along a given pass is the difference :

Residual Height - Mean Sea Surface

Then the real geoid changes across the track are automatically accounted for (to the extent the MSS model is close to the true geoid) because the MSS is spatially interpolated to the actual satellite latitude-longitude in the (O)(I)GDR. The residual height term above is the residual sea surface height after applying all the tidal, atmospheric and ionospheric corrections, etc. Otherwise, those need to be interpolated separately.

One possible approach is to interpolate along track to a set of common points, a "reference" track. The reference could be:

- An actual pass with maximum data and/or minimum gaps, or
- A specially constructed fixed track (see below).

The procedure is the following:

- For each common point, find neighboring points in the pass of interest (POI).
- In the POI, interpolate along track to the common point, using longitude as the independent variable, for each quantity of interest - sea surface height (see above), mean sea surface, geoid, tides, etc.
- As stated above, the quantity to compare at each common point is :

$$\Delta\text{SSH} = \text{Interpolated POI SSH} - \text{Interpolated POI MSS}$$

- Other geophysical corrections must be applied to  $\Delta\text{SSH}$ , depending on the type of investigation

The geoid model in the (O)(I)GDR could substitute the MSS model, but its use will result in reduced accuracy in the interpolation because the resolution of the geoid undulation is lower than that of the MSS.

Desirable features of a fixed reference track include:

- Equal spacing of points (good for FFT)
- Independent variable = (point longitude - pass equator crossing longitude)
- Equator is a point (simplifies calculation)
- Point density similar to original data density

With these specifications, it is possible to make only two fixed tracks, one ascending and one descending, which will serve for all passes. The template pass is then shifted by the equator crossing longitude (global attribute of the product, see 6.2) of each pass. Recall that the equator longitude is from a predicted orbit (not updated during GDR processing). Improved accuracy can be obtained by interpolating in the latitude, longitude values. When one interpolates to the reference





---

track, it is good practice to check that the interpolated latitude from the data records used is close to the latitude on the reference track.

#### 4.2.4. Range Compression

Each 1Hz frame of the AltiKa Ka band range measurement (see range parameter) is derived from the linear regression of the respective valid 40 Hz range measurements (see range\_40hz parameter).

An iterative outlier detection scheme is adopted in this linear regression and the resulting 40 Hz measurements are identified by setting the corresponding bit in the parameters (range\_used\_40hz) to 1. Measurements not considered as outliers have the parameters (range\_used\_40hz) set to 0.

The number of valid 40 Hz measurements that are used to derive each of the 1 Hz measurements is provided on the (O)(I)GDRs (see range\_numval parameter), as are the root-mean-square of the differences between the valid 40 Hz measurements and the derived 1 Hz measurement (see range\_rms parameter). **N.B.:** Please note that a threshold of  $2,3 \cdot 10^{-3}$  is applied on this MQE<sup>4</sup> used to create 1 Hz data from 40 Hz data.

Specialized applications, such as over land, ice, lakes or rivers, may require that the users perform their own compression algorithm on the 40 Hz measurements.

---

<sup>4</sup> MQE : Mean Quadratic Error



## 5. Altimetric data

This section presents a short discussion of the main quantities on the (O)(I)GDR.

An excellent overview of the theoretical and practical effects of radar altimetry is the “Satellite Altimetry” Chapter by *Chelton et al* [2001].

### 5.1. Precise Orbits

CNES has the responsibility for producing the orbit ephemeris for the SARAL/AltiKa data products. The SARAL/AltiKa OGDRs provide a navigator orbit that has radial accuracies better than 3 cm (rms), the IGDRs provide a preliminary orbit that has radial accuracies better than 2 cm (rms), while the GDRs provide a precise orbit that has radial accuracies better than 2 cm (rms).

### 5.2. Altimeter Range

An altimeter operates by sending out a short pulse of radiation and measuring the time required for the pulse to return from the sea surface. This measurement, called the altimeter range, gives the distance between the instrument and the sea surface, provided that the velocity of the propagation of the pulse and the precise arrival time are known. The mono frequency altimeter on SARAL/AltiKa performs only range measurements at Ka band frequencies (see range parameter).

The range reported on the SARAL/AltiKa (O)(I)GDR has already been corrected for a variety of calibration and instrument effects, including calibration errors, center of gravity motion, and terms related to the altimeter acceleration such as Doppler shift and oscillator drift. The sum total of these corrections also appears on the (O)(I)GDR for Ka band range (see net\_instr\_corr\_range parameter).

**N.B:** After analysis of the altimeter flight calibration stability, the calibrations are averaged over a 7 days window for the low pass filter (identical to Jason-2) and 3 days for the internal path delay and total power (not used on Jason-2). This slightly decreases the daily noise observed in the altimeter calibration data.

### 5.3. Geoid

The geoid is an equipotential surface of the Earth's gravity field that is closely associated with the location of the mean sea surface. The reference ellipsoid is a bi-axial ellipsoid of revolution. The center of the ellipsoid is ideally at the center of mass of the Earth although the center is usually placed at the origin of the reference frame in which a satellite orbit is calculated and tracking station positions given. The separation between the geoid and the reference ellipsoid is the geoid undulation (see geoid parameter).

The geoid undulation, over the entire Earth, has a root mean square value of 30.6 m with extreme values of approximately 83 m and -106 m. Although the geoid undulations are primarily long wavelength phenomena, short wavelength changes in the geoid undulation are seen over seamounts, trenches, ridges, etc., in the oceans. The calculation of a high resolution geoid requires high resolution surface gravity data in the region of interest as well as a potential coefficient model that can be used to define the long and medium wavelengths of the Earth's gravitational field. Surface gravity data are generally only available in certain regions of the Earth and spherical harmonic expansions of the Earth's gravitational potential are usually used to define the geoid globally. Currently, such expansions are available to degree 360 and in some cases higher.

For ocean circulation studies, it is important that the long wavelength part of the geoid be accurately determined.



---

## 5.4. Mean Sea Surface

---

A Mean Sea Surface (MSS) represents the position of the ocean surface averaged over an appropriate time period to remove annual, semi-annual, seasonal, and spurious sea surface height signals. A MSS is given as a grid with spacing consistent with the altimeter and other data used in the generation of the grid values. The MSS grid can be useful for data editing purposes, for the calculation of along track and cross track geoid gradients, for the calculation of gridded gravity anomalies, for geophysical studies, for a reference surface to which sea surface height data from different altimeter missions can be reduced, etc. The SARAL/AltiKa (O)(I)GDR provides a global MSS model that is generated from multiple satellite altimetry missions (see `mean_sea_surface` parameter).

Longer time spans of data that become available in the future, geodetic altimeter ground track (like Jason-1 in 2012 and CryoSat orbit) along with dedicated geodetic missions like GRACE and GOCE and improved data handling techniques will improve the current MSS models. Care must be given to the retention of high frequency signal and the reduction of high frequency noise.

---

## 5.5. Mean Dynamic Topography

---

A Mean Dynamic Topography (MDT) represents the Mean Sea Surface referenced to a geoid and corrected from geophysical effects. A MDT is given as a grid with spacing consistent with the altimeter and other data used in the generation of the grid values. The MDT provides the absolute reference surface for the ocean circulation. The SARAL/AltiKa (O)(I)GDR provides a global MDT model (see `mean_topography` parameter) that is a combined product recovering several years based on GRACE mission, altimetry and in situ data (hydrologic and drifters data).

---

## 5.6. Geophysical Corrections

---

The atmosphere and ionosphere slow the velocity of radio pulses at a rate proportional to the total mass of the atmosphere, the mass of water vapor in the atmosphere, and the number of free electrons in the ionosphere. In addition, radio pulses do not reflect from the mean sea level but from a level that depends on wave height and wind speed. The errors due to these processes cannot be ignored and must be removed. Discussions of these effects are given in *Chelton et al.* [2001].

### 5.6.1. Dry Troposphere

The propagation velocity of a radio pulse is slowed by the "dry" gases and the quantity of water vapor in the Earth's troposphere. The "dry" gas contribution is nearly constant and produces height errors of approximately -2.3 m. The water vapor in the troposphere is quite variable and unpredictable and produces a height calculation error of -6 cm to -40 cm. However, these effects can be measured or modeled as discussed below.

The gases in the troposphere contribute to the index of refraction. In detail, the refractive index depends on pressure and temperature. When hydrostatic equilibrium and the ideal gas law are assumed, the vertically integrated range delay is a function only of the surface pressure, see *Chelton et al.* [2001]. The dry meteorological tropospheric range correction is principally equal to the surface pressure multiplied by -2.277mm/mbar, with a small adjustment also necessary to reflect a small latitude dependence (see `model_dry_tropo_corr` parameter).

$$\text{model\_dry\_tropo\_corr} = -2.277 * P_{\text{atm}} * [1 + 0.0026 * \cos(2 * \text{phi})]$$

where  $P_{\text{atm}}$  is surface atmospheric pressure in mbar,  $\text{phi}$  is latitude, and `model_dry_tropo_corr` is the dry troposphere correction in mm. There is no straightforward way of measuring the nadir surface pressure from a satellite, so it is determined from the European Center for Medium Range Weather Forecasting (ECMWF) numerical weather prediction model using the surface pressure fields. For OGDR processing, predicted ECMWF  $P_{\text{surf}}$  fields are used and for (I)GDR processing analyzed fields are used.



### 5.6.2. Wet Troposphere

The amount of water vapor present along the path length contributes to the index of refraction of the Earth's atmosphere. Its contribution to the delay of the radio pulse, the wet tropospheric delay, can be estimated by measuring the atmospheric brightness near the water vapor line at 22.2356 GHz and providing suitable removal of the background. The SARAL/AltiKa dual frequency radiometer measures the brightness temperatures in the nadir path at 23.8 and 37.0 GHz: the water vapor signal is sensed by the 23.8 GHz channel, while the 37 GHz channel removes other atmospheric contributions (surface emission, cloud cover influence) [Keihm *et al.*, 1995]. Measurements are combined to obtain the path delay in the satellite range measurement due to the water vapor content (see `rad_wet_tropo_corr` parameter).

**N.B:** A linear relation has been computed between the measured brightness temperatures and the simulated ones before they enter the neural network algorithm to retrieve the wet tropospheric correction. Since launch, the neural network coefficients have also been adjusted.

The ECMWF numerical weather prediction model provides also a value for the wet tropospheric delay. An interpolated value from this model is included in the (O)(I)GDR, as a backup to the measurement from the radiometer (see `model_wet_tropo_corr` parameter). This backup will prove useful when sun glint, land contamination, or anomalous sensor behavior makes the radiometer measurement of the wet tropospheric delay unusable.

The ECMWF meteorological fields are interpolated to provide the model dry and wet tropospheric corrections at the time and location of the altimeter measurement (see `model_dry_tropo_corr` and `model_wet_tropo_corr`) and an interpolation quality flag is provided on the (O)(I)GDR to indicate the quality of this interpolation (see `interp_flag_meteo`).

### 5.6.3. Ionosphere

The group velocity of the altimeter radar pulses is slowed by the presence of free electrons in the Earth's ionospheric layer. As the Total Electronic Content (TEC) is highly variable in time (diurnal, seasonal, solar cycle variations) and in space (latitude dependent), accurate measurement of the resulting delay requires generally fine sampling coincident with the radar measurements. The ionospheric dispersion being linear, the delay is usually computed by combining the dual-frequency measurements of the radar altimeter (e.g. for T/P, Jason-1 and 2 : Ku and C bands).

In the case of AltiKa, only one frequency is available (Ka), which prevents from using such a classical dual frequency approach. However, it is shown that ionosphere correction ( $= 40300 \times \text{TEC} / \text{frequency}^2$ ) is an order of magnitude smaller in Ka-band than in Ku-band (actually divided by 7). For amplitudes of the ionosphere correction in Ku-band in the range 2-25 cm, equivalent effect in Ka-band is only 0.3-3.6 cm.

Thus, for AltiKa, external ancillary data are used to compute ionosphere correction, in the form of TEC grids computed from GPS-based observations and ionosphere model (the JPL Global Ionosphere Maps - GIM - model). Other auxiliary data such as solar activity coefficients (within IRI95) are used to correct for the difference between the SARAL satellite altitude and the GPS constellation one's.

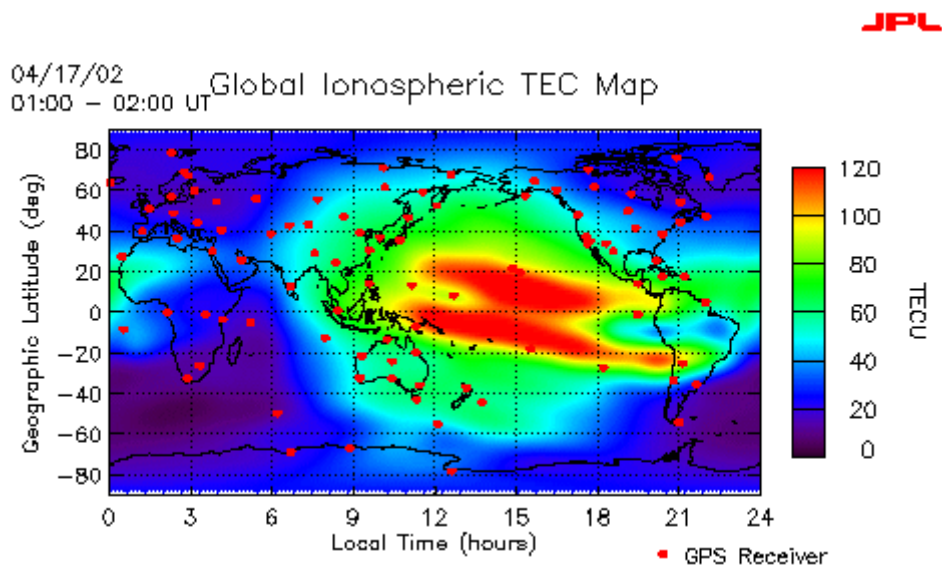


Figure 16. Example of Global Ionosphere Maps from JPL

GIM model has been validated through comparisons with T/P, Jason-1, Jason-2 and ENVISAT dual frequency ionosphere corrections.

As GIM fields are distributed with a 24 hours latency, the correct fields will not be available on time for OGDR processing. In that case, the last GIM field available will be used, as well as an extrapolated MOE orbit, in order to compute in advance the ionosphere correction for OGDR.

#### 5.6.4. Ocean Waves (sea state bias)

Unlike the preceding effects, sea-state effects are an intrinsic property of the large footprint radar measurements. The surface scattering elements do not contribute equally to the radar return; troughs of waves tend to reflect altimeter pulses better than do crests. Thus the centroid of the mean reflecting surface is shifted away from mean sea level towards the troughs of the waves. The shift, referred to as the electromagnetic (EM) bias, causes the altimeter to overestimate the range (see Rodriguez et al., [1992]). In addition, a skewness bias also exists from the assumption in the onboard algorithms that the probability density function of heights is symmetric, while in reality it is skewed. Finally, there is a tracker bias, which is a purely instrumental effect. The sum of EM bias, skewness bias, and tracker bias is called 'sea state bias' (see sea\_state\_bias parameter).

The accuracy of sea state bias models remains limited and continues to be a topic of research. The current most accurate estimates are obtained using empirical models derived from analyses of the altimeter data. The sea state bias is computed from a bilinear interpolation of a table of sea state biases versus significant wave height and wind speed, based on empirical fits (Labroue [2004]).

### 5.7. Trailing edge variation flag

#### 5.7.1. Introduction : Rain & Cloud effect on SARAL/AltiKa

Ka-band is highly sensitive to rainy and cloudy conditions. It means that an overall assessment of rain effect on SARAL/AltiKa data availability and quality should be performed during the verification phase in order to monitor global percentage and spatio-temporal evolution of lost data due to rain and cloud effect, and thus give a consolidated budget for data loss due to rain attenuation and waveform distortion.



---

Attenuation by rain is expected to be much more significant at Ka-band than Ku-band, although even in the tropics, actual data loss is only expected to be 5-10% (Tournadre et al., 2009). The in-flight data unavailability measured since launch and due to rain is about 4-5%. However, the reliable detection and flagging of rain-contaminated data is important for the quality of the overall altimeter product.

### 5.7.2. SARAL/AltiKa Trailing edge variation flag

Due to the mono-frequency characteristic of the SARAL/AltiKa altimeter, the rain flags used for T/P and Jason-1&2 altimeters can not be used as they rely on the differential attenuation by rain of the signal at Ku and C band. Furthermore, the use of Ka band implies that not only rain can significantly alter the altimeter measurement but also dense cloud, that is why we prefer using “trailing edge variation effect” instead of “rain effect”.

A new “trailing edge variation flag” based on the analysis of the along-track variation of the off-nadir angle estimate (the so-called “Matching Pursuit” algorithm) has been defined and tested using Jason-1 data (Tournadre et al., 2009) and is used operationally to detect the data potentially affected by atmospheric liquid water. This new approach to altimeter data rain flagging has been validated and calibrated during the commissioning phase.

### 5.7.3. Limitations

Please note that the `trailing_edge_variation_flag` parameter should be used carefully. In fact, as mentioned above, this flag detects changes caused by rain, sigma-blooms, cloud, etc. The meaning of the flag is: non short scale variation/short scale variation. To be considered only as a rain flag users should correlate this flag with water vapor content or liquid water content (see `rad_water_vapor` and `rad_liquid_water` parameter). [This auxiliary information comes from the radiometer measurements. Thresholds for these auxiliary parameters should be defined and provided to users.](#)

## 5.8. Ice Flag

---

The range measurement from the altimeter is likely to have larger errors when the pulse is reflected off ice surfaces. The ice surface is not at sea level, but at some unknown distance above it. For this reason the SARAL/ALTIKA (O)(I)GDR provides an ice flag (see `ice_flag` parameter) to indicate when the data point is likely to be over ice.

The ice flag is set if the absolute value of the difference between the model wet tropospheric correction and the dual frequency wet tropospheric correction retrieved from 23.8 GHz and 37.0 GHz brightness temperatures exceeds a specified threshold, OR if the number of valid 40-Hz altimeter range of the processed measurement is smaller than a specified threshold. If the corresponding computations cannot be performed, then the ice flag is set if a climatological map predicts ice at the given location, and if the wind speed derived from the altimeter measurement is less than 1 m/s, i.e., the backscatter is larger than normally expected from the ocean.





---

## 5.9. Tides

---

Tides are a significant contributor to the observed sea surface height [LeProvost, 2001]. While they are of interest in themselves, they have more variation than all other time-varying ocean signals. Since they are highly predictable, they are removed from the data in order to study ocean circulation.

There are several contributions to the tidal effect: the ocean tide, the load tide, the solid earth tide and the pole tide. The ocean tide, load tide and solid earth tide are all related to luni-solar forcing of the earth, either directly as is the case of the ocean and solid earth tide, or indirectly as is the case with the load tide since it is forced by the ocean tide. The pole tide is due to variations in the earth's rotation and is unrelated to luni-solar forcing.

SARAL/AltiKa (O)(I)GDRs do not explicitly provide values for the pure ocean tide, but instead provide values for a quantity referred to as the geocentric ocean tide, which is the sum total of the ocean tide and the load tide. Values of the load tide that were used to compute the geocentric ocean tide are also explicitly provided, so the pure ocean tide can be determined by subtracting the load tide value from the geocentric ocean tide value. Note that the permanent tide is not included in either the geocentric ocean tide or solid earth tide corrections that are provided on the SARAL/AltiKa (O)(I)GDRs.

### 5.9.1. Geocentric Ocean Tide

As mentioned above, the geocentric ocean tide is a quantity sometimes used to refer to the sum total of the ocean tide and the load tide. The SARAL/AltiKa (O)(I)GDR provides two choices for the geocentric ocean tide, `ocean_tide_sol1` and `ocean_tide_sol2`, each of which is computed as the sum total of the diurnal and semidiurnal ocean and load tides as predicted by a particular model, and an equilibrium representation of the long-period ocean tides at all periods except for the zero frequency (constant) term. The two load tide values provided on the GDR, `load_tide_sol1` and `load_tide_sol2`, provide the respective load tide values that were used to compute `ocean_tide_sol1` and `ocean_tide_sol2`.

### 5.9.2. Long period Ocean Tide

The long-period ocean tides are a subject of continuing investigation. To first order, they can be approximated by an equilibrium representation. However, the true long-period ocean tide response is thought to have departures from an equilibrium response that increase with decreasing period. The two principal long-period ocean tide components,  $M_f$  and  $M_m$ , with fortnightly and monthly periods respectively, are known to have departures from an equilibrium response with magnitudes less than 1-2 cm.

The SARAL/AltiKa (O)(I)GDR explicitly provides a value for an equilibrium representation of the long-period ocean tide that includes all long-period tidal components excluding the permanent tide (zero frequency) component (see parameter `ocean_tide_equil`). Note that both geocentric ocean tide values on the (O)(I)GDR (`ocean_tide_sol1` and `ocean_tide_sol2`) already include the equilibrium long-period ocean tide and should therefore not be used simultaneously.

The SARAL/AltiKa (O)(I)GDR provides a parameter for a non-equilibrium representation of the long-period ocean tides (see parameter `ocean_tide_non_equil`). This parameter is provided as a correction to the equilibrium long-period ocean tide model so that the total non-equilibrium long period ocean tide is formed as a sum of `ocean_tide_equil` and `ocean_tide_non_equil`.

### 5.9.3. Solid Earth Tide

The solid Earth responds to external gravitational forces similarly to the oceans. The response of the Earth is fast enough that it can be considered to be in equilibrium with the tide generating forces. Then, the surface is parallel with the equipotential surface, and the tide height is proportional to the potential. The two proportionality constants are the so-called Love numbers. It





should be noted that the Love numbers are largely frequency independent, an exception occurs near a frequency corresponding to the K1 tide constituents due to a resonance in the liquid core [Wahr, 1985 and Stacey, 1977].

The SARAL/AltiKa (O)(I)GDR computes the solid earth tide, or body tide, as a purely radial elastic response of the solid Earth to the tidal potential (see parameter `solid_earth_tide`.) The adopted tidal potential is the *Cartwright and Taylor* [1971] and *Cartwright and Edden* [1973] tidal potential extrapolated to the 2000 era, and includes degree 2 and 3 coefficients of the tidal potential. The permanent tide (zero frequency) term is excluded from the tidal potential that is used to compute the solid earth tide parameter for the SARAL/AltiKa (O)(I)GDR. The elastic response is modeled using frequency independent Love numbers. The effects of the resonance in the core are accounted for by scaling the tide potential amplitude of the K1 tidal coefficient and some neighboring nodal terms by an appropriate scale factor.

### 5.9.4. Pole Tide

The pole tide is a tide-like motion of the ocean surface that is a response of both the solid Earth and the oceans to the centrifugal potential that is generated by small perturbations to the Earth's rotation axis. These perturbations primarily occur at periods of 433 days (called the Chandler wobble) and annual. These periods are long enough for the pole tide displacement to be considered to be in equilibrium with the forcing centrifugal potential. The SARAL/AltiKa (O)(I)GDR provides a single field for the radial geocentric pole tide displacement of the ocean surface (see `pole_tide` parameter), and includes the radial pole tide displacement of the solid Earth and the oceans.

The pole tide is easily computed as described in Wahr [1985]. Modeling the pole tide requires knowledge of proportionality constants, the so-called Love numbers, and a time series of perturbations to the Earth's rotation axis, a quantity that is now measured routinely with space techniques. Note that the pole tide on the IGDR and GDR may differ, since the pole tide on the GDR is computed with a more accurate time series of the Earth's rotation axis.

## 5.10. Inverse Barometer Effect

---

### 5.10.1. Inverted Barometer Correction

As atmospheric pressure increases and decreases, the sea surface tends to respond hydrostatically, falling or rising respectively. Generally, a 1-mbar increase in atmospheric pressure depresses the sea surface by about 1 cm. This effect is referred to as the inverse barometer (IB) effect.

The instantaneous IB effect on sea surface height in millimeters (see parameter `inv_bar_corr`) is computed from the surface atmospheric pressure,  $P_{atm}$  in mbar:

$$\text{inv\_bar\_corr} = -9.948 * (P_{atm} - P)$$

where  $P$  is the time varying mean of the global surface atmospheric pressure over the oceans.

The scale factor 9.948 is based on the empirical value [Wunsch, 1972] of the IB response at mid latitudes. Some researchers use other values. Note that the surface atmospheric pressure is also proportional to the dry tropospheric correction, and so the parameter `inv_bar_corr` approximately changes by 4 to 5 mm as `model_dry_tropo_corr` changes by 1 mm (assuming a constant mean global surface pressure). The uncertainty of the ECMWF atmospheric pressure products is somewhat dependent on location. Typical errors vary from 1 mbar in the northern Atlantic Ocean to a few mbars in the southern Pacific Ocean. A 1-mbar error in pressure translates into a 10 mm error in the computation of the IB effect.

Note that the time varying mean global pressure over the oceans,  $P$ , during the first eight years of the T/P mission had a mean value of approximately 1010.9 mbar, with an annual variation around this mean of approximately 0.6 mbar. However, the T/P data products provided a static inverse barometer correction referenced to a constant mean pressure of 1013.3 mbar.



---

$$IB(T/P) = -9.948 * (P_{atm} - 1013.3)$$

Sea surface heights that are generated after applying an inverse barometer correction referenced to a mean pressure of 1013.3 mbar are therefore approximately  $-9.948 * (1010.9 - 1013.3) = 23.9$  mm lower than those that are generated after applying an inverse barometer correction referenced to a time varying global mean pressure, and the difference between the two sea surface heights has an annual variation of approximately  $9.948 * 0.6 = 6$  mm.

### 5.10.2. Barotropic/Baroclinic Response to Atmospheric Forcing

The High Frequency Wind and Pressure Response correction, `hf_fluctuations_corr`, complements the Inverted Barometer (IB) correction. Like both tides and IB, the ocean response to wind and pressure (after removing the IB part) has energy at periods higher than 20 days. This correction can be thought of as a departure from the IB response to pressure, although strictly it is the difference between the response to wind and pressure minus the IB. The model output is filtered in time to pass frequencies shorter than 20 days. See also *Stammer et al.* [1999] and *Tierney et al.* [2000].

The parameter `hf_fluctuations_corr` is provided in the (I)GDR products as a correction to the inverse barometer correction `inv_bar_corr`.

### 5.11. Sigma 0

---

The backscatter coefficient, `sigma0 Ka` values (see parameters `sig0`), reported on the (O)(I)GDR are corrected for atmospheric attenuation given by radiometer measurements using `atmos_corr_sig0`. Note that "unbiased" `sigma0` values are recorded on the SARAL/AltiKa data products.

**Disclaimer :** the SARAL altimeter uses a Ka band which is new for nadir altimeter. It is worth recalling that Ka band is highly sensitive to the rain and cloud attenuation. It was not possible to assess precisely the impact on the sigma naught before launch. User are so advised to use this parameter with care.

### 5.12. Wind Speed

---

The model functions developed for AltiKa altimeter wind speed is a one-dimensional model, as a function of backscatter, tuned to AltiKa's backscatter measurements. The performance of these new Ka-band altimeter wind speed models is assessed through validation with independent ocean buoy wind speeds. More information available in "One- and Two-Dimensional Wind Speed Models for Ka-band Altimetry" by John Lillibridge, Remko Scharroo, Saleh Abdalla, and Doug Vandemark [Journal of Atmospheric and Oceanic Technology, 2013].

Note that for the calculation of wind speed, we use a table based on `sigma_0` values limited between 5 and 25dB.

A 10-meter (above surface) wind vector (in east-west and north-south directions) is also provided on the SARAL/AltiKa (O)(I)GDR (see parameters `wind_speed_model_u` and `wind_speed_model_v`). This wind speed vector is determined from an interpolation of the ECMWF model. The best accuracy for the wind vector varies from about 2 m/s in magnitude and 20 degrees in direction in the northern Atlantic Ocean, to more than 5 m/s and 40 degrees in the southern Pacific Ocean.

### 5.13. Bathymetry Information

---

The SARAL/AltiKa (O)(I)GDR provides a parameter bathymetry that gives the ocean depth or land elevation of the data point. Ocean depths have negative values, and land elevations have positive values. This parameter is given to allow users to make their own "cut" for ocean depth.



## 6. Data description

The main characteristics of (O)(I)GDR products are summarized in the following table.

Features	OGDR	IGDR	GDR
<b>Primary Goal</b>	To provide wind/wave data to meteorological users. Also designed to provide altimeter range, environmental and geophysical corrections together with a real-time orbit in order to make NRT SSHA available to ocean users	To provide sea surface height data to operational oceanography users (with a more accurate orbit and additional environmental / geophysical corrections w.r.t. OGDR)	To fulfill the project science objectives (AD 2)
<b>Content</b>	Geophysical level 2 product (Altimeter/radiometer), including waveforms retracking		
	+ available environmental and geophysical corrections	+ all the environmental and geophysical corrections (preliminary for some of them)	+ all the environmental and geophysical corrections (precise)
<b>Orbit</b>	Req: 30 cm DORIS navigator Measured: 3.3 cm rms	Req: 4 cm MOE (processed DORIS data) Measured: 2 cm rms	Req: 3 cm POE (processed DORIS and laser data) Measured: 2 cm rms
<b>Delivery delay (after data acquisition)</b>	Near-Real Time	Off-Line	Off-Line
	3-5 hours	1.5 calendar days	40 days
<b>Validation</b>	Not fully validated (elementary and automatic controls only)		Fully validated (in depth validation performed on a cycle basis before delivery)
<b>Validation by Experts</b>	No		Yes (CNES/SALP)
<b>Structure</b>	Segment	Pole to pole pass	
<b>Ground Processing Centre</b>	EUMETSAT and ISRO	CNES	CNES and ISRO

**Table 17 : Main characteristics of (O)(I)GDR products**

The differences between Auxiliary Data used for OGDR, IGDR and GDR products is given in section 1.1. The main fields recomputed for GDR with respect to IGDR are the following:

- Due to the update of orbit data:
  - Latitude (“latitude”)
  - Longitude (“longitude”)
  - Altitude (“alt”, “orb\_state\_flag\_rest”, “alt\_40hz”)
  - Orbital altitude rate (“orb\_alt\_rate”)
  - Sum of the instrumental corrections (“net\_instr\_corr\_range”)
  - Corrected ground retracked altimeter ranges (“range”)
  - Ionospheric correction (“iono\_corr\_gim”)
- Due to the update of platform data:



- Distance antenna-COG correction (“cog\_corr”)
- Sum of the instrumental corrections (“net\_instr\_corr\_range”)
- Corrected ground retracked altimeter ranges (“range”)
- Ionospheric correction (“iono\_corr\_gim”)
- Due to the update of pole locations:
  - Pole tide height (“pole\_tide”)
- Due to the update of Mog2D data:
  - High frequency dealiasing correction (“hf\_fluctuations\_corr”)
- Due to Long-Term Monitoring calibration used for processing

## 6.1. Data format

SARAL/AltiKa OGDR, IGDR and GDR products have the same information and format. The only difference is related to the auxiliary data used (orbit, meteo files, calibrations, ... ).

Accounting for Jason-2 heritage, products are split into three data sets :

- “SSHA” data set : One file close to Jason-2 NRT-SSHA, limited to 1Hz sampling values
- “GDR” data set : One file close to Jason-2 IGDR, containing 1Hz and 40Hz values
- “SGDR” data set : One file close to Jason-2 SGDR, containing 1Hz, 40hz and waveforms values

The following figure shows the data sets available for each kind of product.

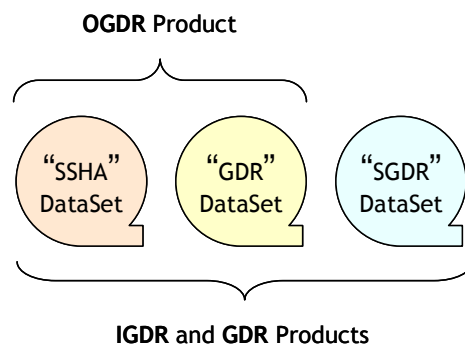


Figure 17 : Data set availability per product

OGDR products are also available in BUFR-formatted dataset for distribution via the World Meteorological Organization (WMO) Global Tele-communication System (GTS).

### 6.1.1. NetCdf format and CF convention

The [netCDF](#) data format has been chosen to store the different data sets (one file per data set). This format is extremely flexible, self describing and has been adopted as a de-facto standard for many operational oceanography systems. What’s more, the files follow the Climate and Forecast NetCDF conventions CF-1.1 because these conventions provide a practical standard for storing.



## 6.1.2. The NetCDF Data Model

A netCDF file contains **dimensions**, **variables**, and **attributes**, which all have both a name by which they are identified. These components can be used together to capture the meaning of data and relations among data fields in an array-oriented data set.

### 6.1.2.1. Dimensions

A dimension may be used to represent a real physical dimension, for example, time, latitude, longitude, or height. A dimension might also be used to index other quantities (waveforms index for example). The following dimensions are used in the SARAL/AltiKa product files:

Dimension Name	Value	SSHA Data Set	GDR Data Set	SGDR Data Set
time	Number of measurements in the file	X	X	X
meas_ind	40 (number of elementary measurements)		X	X
wvf_ind	128 (number of waveform samples)			X

Table 18 - Dimensions used in the SARAL/AltiKa data sets

### 6.1.2.2. Variables

Variables are used to store the bulk of the data in a netCDF file. A variable represents an array of values of the same type. A scalar value is treated as a 0-dimensional array. A variable has a name, a data type, and a shape described by its list of dimensions specified when the variable is created. A variable may also have associated attributes, which may be added, deleted or changed after the variable is created.

A variable data type is one of a small set of netCDF types. In this document the variable types will be represent as follows:

Variable type	Description
char	characters
byte	8-bit data signed
short	16-bit signed integer
int	32-bit signed integer
float	IEEE single precision floating point (32 bits)
double	IEEE double precision floating point (64 bits)

Table 19 - netCDF variable type

### 6.1.2.3. Coordinate variables and auxiliary coordinate variables

A variable with the same name as a dimension is called a **coordinate variable**. It typically defines a physical coordinate corresponding to that dimension. In accordance with the Climate and Forecast conventions, we must declare a coordinate variable for each dimension. What's more, missing values are not allowed in coordinate variables and they must be strictly monotonic.

An **auxiliary coordinate variable** is a netCDF variable that contains coordinates data but is not a coordinate variable as defined above. Unlike coordinate variables, there is no relationship between the name of an auxiliary coordinate variable and the name(s) of its dimension(s).

### 6.1.2.4. Attributes

NetCDF attributes are used to store data about the data (ancillary data or metadata), similar in many ways to the information stored in data dictionaries and schema in conventional database systems. Most attributes provide information about a specific variable. These are identified by the name of that variable, together with the name of the attribute.



Some attributes provide information about the data set as a whole. They are called **global attributes** - similar to the header of the Jason-1 products.

The following table shows the variable attributes used in the SARAL/AltiKa product. There are no mandatory attributes.

Attribute	Description
_FillValue	A default value used to represent missing or undefined data
add_offset	If present, this number is to be added to the data after it is read by an application. If both <i>scale_factor</i> and <i>add_offset</i> attributes are present, the data are first scaled before the offset is added
calendar	Reference time calendar
comment	Miscellaneous information about the data or the methods used to produce it
coordinates	Identified auxiliary coordinates variables
flag_meanings	Use in conjunction with <i>flag_values</i> to provide descriptive words or phrase for each flag value
flag_values	Provide a list of the flag values. Use in conjunction with <i>flag_meanings</i>
institution	Institution which provides the data
leap_second	UTC time at which a leap second occurs
long_name	A descriptive name that indicates a variable's content. This name is not standardized
quality_flag	Name of the variable(s) (quality flag) representing the quality of the current variable
scale_factor	If present, the data are to be multiplied by this factor after the data are read by an application. See also <i>add_offset</i> attribute
source	Data source (model features, or observation)
standard_name	A standard name that references a description of a variables content in the <a href="#">standard name table</a>
tai_tuc_difference	Difference between TAI and UTC reference time
units	Unit of a variable's content. The value of this attribute must be a string that can be recognized by the <a href="#">UNIDATA's Udunits package</a>
valid_max	Largest theoretical valid value of a variable (this is not the maximum of actual data)
valid_min	Smallest theoretical valid value of a variable (this is not the minimum of actual data)

Table 20 - Variable's attributes

### 6.1.3. The Common Data Language

The Common Data Language (CDL) is used to describe the content of a data set.

The CDL is textual notation that described the netCDF object and it is human readable. The netCDF utility **ncdump** converts netCDF objects binary to CDL text. The netCDF utility **ncgen** creates netCDF binary file from CDL text file.

A CDL description of a netCDF data set takes the form:

```
netCDF name {
  dimension: ...
  variables: ...
  data: ...
}
```

where the name is used only as a default in constructing file names by the ncgen utility. The CDL description consists of three optional parts, introduced by the keywords dimensions variables and data. NetCDF dimension declarations appear after the dimensions keyword, netCDF variables and attributes are defined after the variables keyword and variable data assignments appears after the data keyword. CDL statement are terminated by a semicolon. Spaces, tabs and newlines can be used freely for readability. Comments in CDL follow the characters '//' on any line.

#### Example



```
netcdf example {
dimensions:
    time = 3213 ;                // dimensions name are declared first
    meas_ind = 40 ;
variables:
double time(time) ;            // variable <type> <name>(<dimension>)
    time:long_name = "time (sec. since 2000-01-01)" ; // variable attributes
    time:standard_name = "time" ;
    time:calendar = "gregorian" ;
    time:tai_utc_difference = -34. ;
    time:leap_second = "0000-00-00 00:00:00" ;
    time:units = "seconds since 2000-01-01 00:00:00.0" ;
    time:comment = "[tai_utc_difference] is the difference between TAI and UTC reference
time (seconds) for the first measurement of the data set. [leap_second] is the UTC time at which a leap
second occurs in the data set, if any. After this UTC time, the tai_utc_difference is increased by 1
second." ;

byte meas_ind(meas_ind) ;
    meas_ind:long_name = "elementary measurement index" ;
    meas_ind:units = "count" ;
    meas_ind:comment = "Set to be compliant with the CF-1.1 convention" ;

double time_40hz(time, meas_ind) ;
    time_40hz:_FillValue = 1.84467440737096e+19 ;
    time_40hz:long_name = "time 40 Hz (sec. since 2000-01-01)" ;
    time_40hz:standard_name = "time" ;
    time_40hz:calendar = "gregorian" ;
    time_40hz:tai_utc_difference = -34. ;
    time_40hz:leap_second = "0000-00-00 00:00:00" ;
    time_40hz:units = "seconds since 2000-01-01 00:00:00.0" ;
    time_40hz:comment = "[tai_utc_difference] is the difference between TAI and UTC
reference time (seconds) for the first measurement of the data set. [leap_second] is the UTC time at
which a leap second occurs in the data set, if any. After this UTC time, the tai_utc_difference is
increased by 1 second." ;

int lat(time) ;
    lat:long_name = "latitude" ;
    lat:standard_name = "latitude" ;
    lat:units = "degrees_north" ;
    lat:quality_flag = "orb_state_flag_rest" ;
    lat:scale_factor = 1.e-06 ;
    lat:comment = "Positive latitude is North latitude, negative latitude is South latitude. See
SARAL User Handbook" ;

int lon(time) ;
    lon:long_name = "longitude" ;
    lon:standard_name = "longitude" ;
    lon:units = "degrees_east" ;
    lon:quality_flag = "orb_state_flag_rest" ;
    lon:scale_factor = 1.e-06 ;
    lon:comment = "East longitude relative to Greenwich meridian. See SARAL User
Handbook" ;

byte surface_type(time);
    surface_type:long_name = "surface type";
    surface_type:_FillValue = 127b;
    surface_type:flag_values = 0b, 1b, 2b, 3b ;
    surface_type:flag_meanings = "ocean lake_enclosed_sea ice land";
    surface_type:coordinates = "lon lat";
    surface_type:comment = "Computed using a DTM2000 file: 0 = open oceans or semi-enclosed seas; 1
= enclosed seas or lakes; 2 = continental ice; 3 = land. See AltiKa User Handbook";

int alt(time) ;
    alt:_FillValue = 2147483647 ;
    alt:long_name = "1 Hz altitude of satellite" ;
    alt:standard_name = "height_above_reference_ellipsoid" ;
    alt:units = "m" ;
    alt:quality_flag = "orb_state_flag_rest" ;
```





---

```
alt:add_offset = 800000. ;  
alt:scale_factor = 0.0001 ;  
alt:coordinates = "lon lat" ;  
alt:comment = "Altitude of satellite above the reference ellipsoid" ;
```

- time is a coordinate variable
- surface\_type is a flag fully described by the flag\_meanings and flag\_values attributes:

surface_type	= 0	-> ocean
surface_type	= 1	-> lake or enclosed sea
surface_type	= 2	-> ice
surface_type	= 3	-> land

If surface\_type is not computed, it will take the value 127 (\_FillValue attribute).

- alt\_time is packed. The data are stored in 32-bit integers (long). The value of the altitude of the satellite can be recovered using:

$$\text{alt} = (\text{alt}_{\text{long}} * \text{scale\_factor}) + \text{add\_offset}$$



## 6.2. Global attributes

Global attributes (the equivalent of header parameters for Jason-2 products) may be displayed from a SSHA/GDR/SGDR data set file using “ncdump -h” command.

A list (not necessarily exhaustive) of the global attributes available in these data sets is given below (attribute name and description).

Attributes	Description	Example
convention	netCDF convention followed	CF-1.1
title_reduced	A descriptive title for the data set	Reduced dataset
title_standard	A descriptive title for the data set	Standard
title_expertise	A descriptive title for the data set	Expertise dataset
contact		CNES aviso@oceanobs.com, ISRO <b>TBC</b>
reference_document		SARAL/ALTIKA Products Handbook, SALP-MU-M-OP-15984-CN
mission_name		SARAL
altimeter_sensor_name		ALTIKA
altimeter_sensor_institution		CNES
radiometer_sensor_name		ALTIKA_RAD
radiometer_sensor_institution		CNES
doris_sensor_name		DGXX
mto_fields_source		European Center for Medium Range Weather Forecasting (ECMWF)
mto_fields_institution		ECMWF
altimeter_ssb_source		Empirical solution fitted on 6 months of SARAL GDR_C data
altimeter_ssb_institution		NOAA Laboratory for Satellite Altimetry
ocean_tide_sol1_source		GOT4.8
ocean_tide_sol1_institution		GSFC
ocean_tide_sol2_source		FES2012
ocean_tide_sol2_institution		LEGOS/NOVELTIS/CNES/CLS
ocean_tide_eq_source		Cartwright and Taylor tidal potential
ocean_tide_eq_institution		TBD
ocean_tide_neq_source		FES2012
ocean_tide_neq_institution		LEGOS/NOVELTIS/CNES/CLS
tidal_loading_sol1_source		GOT4.8
tidal_loading_sol1_institution		GSFC
tidal_loading_sol2_source		GOT4.8
tidal_loading_sol2_institution		GSFC
solid_earth_tide_source		Cartwright and Edden tidal potential
solid_earth_tide_institution		TBD
geoid_source		EGM96
geoid_institution		GSFC
mean_sea_surface_source		MSS-CNES-CLS-2011
mean_sea_surface_institution		CNES/CLS
bathy_topo_source		DTM2000.1
bathy_topo_institution		GSFC
mdt_source		MDT-CNES-CLS-2009
mdt_institution		CNES
pole_tide_source		Wahr [1985]
pole_tide_institution		TBD
mog2D_institution		LEGOS/CLS/CNES
GIM_institution		NASA/JPL



## Conventions

<b>title</b>	A descriptive title for the data set
<b>institution</b>	The name of the data producer
<b>source</b>	The method of production of original data
<b>history</b>	Date and Product Create Time
<b>contact</b>	A text giving the primary contact for information about the data set
<b>references</b>	The version of the altimetric library used to produce the data set
<b>processing_center</b>	Name of the processing center
<b>reference_document</b>	Name of the reference document describing the products
<b>mission_name</b>	Name of the mission
<b>altimeter_sensor_name</b>	Name of the altimeter sensor
<b>radiometer_sensor_name</b>	Name of the radiometer sensor
<b>doris_sensor_name</b>	Name of the DORIS sensor
<b>acq_station_name</b>	Identification of the acquisition station
<b>cycle_number</b>	Cycle number
<b>absolute_rev_number</b>	Absolute number of revolution
<b>pass_number</b>	Pass number in the cycle (relative pass number)
<b>absolute_pass_number</b>	Absolute pass number (since the beginning of the mission)
<b>equator_time</b>	UTC time of equator crossing
<b>equator_longitude</b>	Longitude of equator crossing
<b>altimeter_level1</b>	Name of the altimeter level 1.0 product
<b>radiometer_level1</b>	Name of the radiometer level 1.0 product
<b>altimeter_chacterisation</b>	Name of the altimeter characterization data file
<b>altimeter_ltm</b>	Name of the altimeter Long Term Monitoring data file
<b>radiometer_temp</b>	Name of the file containing the antenna temperature coefficients
<b>doris_uso</b>	Name of the file containing the DORIS-derived USO frequency
<b>orbit_data</b>	Name of the file containing the orbit ephemeris
<b>pf_data</b>	Name of the file containing the platform data
<b>pole_location</b>	Name of the file containing the pole location data
<b>orf_data</b>	Name of the Orbit Revolution File used to create the pass file
<b>altimeter_instr_corr</b>	Generic name of the altimeter instrumental corrections files
<b>radiometer_mbt_coeff</b>	Name of the radiometer main beam brightness temperature coefficients file
<b>radiometer_ave_coeff</b>	Name of the radiometer along track averaging coefficients file
<b>radiometer_surf_coeff</b>	Name of the radiometer surface type coefficients file
<b>radiometer_level2_coeff</b>	Name of the radiometer level 2 coefficients file
<b>land_sea_mask_map</b>	Name of the land / sea mask map



---

### 6.3. Data Sets

---

Variables attributes are identified in section 6.1.2.4 they may be displayed from a SSHA/GDR/SGDR data set file using “ncdump -h” command.

Some examples (not necessarily fully up to date) are given below:

```
double time(time) ;
    time:long_name = "time (sec. since 2000-01-01)" ;
    time:standard_name = "time" ;
    time:calendar = "gregorian" ;
    time:tai_utc_difference = -34. ;
    time:leap_second = "0000-00-00 00:00:00" ;
    time:units = "seconds since 2000-01-01 00:00:00.0" ;
    time:comment = "[tai_utc_difference] is the difference between TAI and UTC reference
time (seconds) for the first measurement of the data set. [leap_second] is the UTC time at which a leap
second occurs in the data set, if any. After this UTC time, the tai_utc_difference is increased by 1
second." ;
```

```
byte meas_ind(meas_ind) ;
    meas_ind:long_name = "elementary measurement index" ;
    meas_ind:units = "count" ;
    meas_ind:comment = "Set to be compliant with the CF-1.1 convention" ;
```

```
double time_40hz(time, meas_ind) ;
    time_40hz:_FillValue = 1.84467440737096e+19 ;
    time_40hz:long_name = "time 40 Hz (sec. since 2000-01-01)" ;
    time_40hz:standard_name = "time" ;
    time_40hz:calendar = "gregorian" ;
    time_40hz:tai_utc_difference = -34. ;
    time_40hz:leap_second = "0000-00-00 00:00:00" ;
    time_40hz:units = "seconds since 2000-01-01 00:00:00.0" ;
    time_40hz:comment = "[tai_utc_difference] is the difference between TAI and UTC
reference time (seconds) for the first measurement of the data set. [leap_second] is the UTC time at
which a leap second occurs in the data set, if any. After this UTC time, the tai_utc_difference is
increased by 1 second." ;
```

```
short ssha(time);
    ssha:long_name = "sea surface height anomaly";
    ssha:standard_name = "sea_surface_height_above_sea_level";
    ssha:source = [altimeter_sensor_name];
    ssha:institution = [altimeter_sensor_institution];
    ssha:_FillValue = 32767;
    ssha:units = "m";
    ssha:scale_factor = 1.00e-03;
    ssha:coordinates = "lon lat";
    ssha:comment = "= altitude of satellite (alt) - corrected altimeter range (range) - gim ionospheric
correction (iono_cor_gim) - model dry tropospheric correction (model_dry_tropo_corr) - radiometer wet
tropospheric correction (rad_wet_tropo_corr) - sea state bias correction (sea_state_bias) - solid earth
tide height (solid_earth_tide) - geocentric ocean tide height solution 1 (ocean_tide_sol1) - geocentric
pole tide height (pole_tide) - inverted barometer height correction (inv_bar_corr) - high frequency
fluctuations of the sea surface topography (hf_fluctuations_corr for I/GDR off line products only) - mean
sea surface (mean_sea_surface). Calculated even if iono_corr_gim is at default value";
```



---

## 6.4. Software

---

This section lists some software that may be used to browse and use data from SSHA, GDR and SGDR data sets.

### 6.4.1. Software provided with netCDF : “ncdump”

« ncdump » converts netCDF files to ASCII form (CDL)

See <http://www.unidata.ucar.edu/software/netcdf/docs/ncdump-man-1.html>

The main options are the following :

- h Show only the header information in the output, that is the declarations of dimensions, variables, and attributes but no data values for any variables
- c Show the values of coordinate variables (variables that are also dimensions) as well as the declarations of all dimensions, variables, and attribute values
- v *var1,...,varn* The output will include data values for the specified variables, in addition to the declarations of all dimensions, variables, and attributes
- x *var1,...,varn* Output XML (NcML) instead of CDL. The NcML does not include data values

### 6.4.2. Additional general software

#### 6.4.2.1. ncbrowse

“ncBrowse” is a Java application that provides flexible, interactive graphical displays of data and attributes from a wide range of netCDF data file conventions.

See <http://www.epic.noaa.gov/java/ncBrowse/>

#### 6.4.2.2. netCDF Operator (NCO)

The netCDF Operators, or “NCO”, are a suite of programs known as **operators**. Each operator is a standalone, command line program which is executed at the UNIX shell-level, like, e.g., `ls` or `mkdir`. The operators take netCDF files as input, then perform a set of operations (e.g., deriving new data, averaging, hyperslabbing, or metadata manipulation) and produce a netCDF file as output. The operators are primarily designed to aid manipulation and analysis of gridded scientific data. The single command style of NCO allows users to manipulate and analyze files interactively and with simple scripts, avoiding the overhead (and some of the power) of a higher level programming environment.

See <http://nco.sourceforge.net/>

### 6.4.3. Additional specific software : “BRAT”

The “Basic Radar Altimetry Toolbox” is a collection of tools and tutorial documents designed to facilitate the use of radar altimetry data. It is able to read most distributed radar altimetry data from all the satellites, to do some processing, data editing and statistic over them, and to visualise the results. The Basic Radar Altimetry Toolbox is able to read ERS-1 and 2, TOPEX/Poseidon, GEOSAT Follow-on, Jason-1, Jason-2, ENVISAT, SARAL/AltiKa and CRYOSAT-2 missions altimetry data from official data centers (ESA, NASA/JPL, CNES/AVISO, NOAA, ISRO), and this for different processing levels, from level 1B (Sensor Geophysical Data Record) to level 3/4 (gridded merged data).

See [http://www.altimetry.info/html/data/toolbox\\_en.html](http://www.altimetry.info/html/data/toolbox_en.html).



---

## 6.5. OGDR BUFR product

---

The Global Telecommunications System (GTS) is the coordinated global system of telecommunication facilities and provides rapid collection, exchange and distribution of observations and processed information within the framework of the World Weather Watch. It is implemented and operated by National Meteorological Services of the World Meteorological Organisation (WMO) members and also by a few international organizations (ECMWF, EUMETSAT). The GTS consists of an integrated network of point-to-point circuits, and multi-point circuits which interconnect meteorological telecommunication centres.

SARAL/AltiKa BUFR products are designed primarily for dissemination via the GTS and they consequently follow the format conventions defined by the WMO for all data disseminated on the GTS. The WMO FM-94 BUFR (Binary Universal Form for the Representation of Meteorological data), is a binary code designed to represent, employing a continuous binary stream, any meteorological data. It has been designed to achieve efficient exchange and storage of meteorological and oceanographic data. It is self defining, table driven and a very flexible data representation system, especially for big volumes of data.

The following table summarises how to identify SARAL/AltiKa OGDR data in BUFR format on the GTS.

Product	Bulletin header	Originating station	Descriptor sequence
OGDR generated at EUMETSAT	ISZX02	EUMS	3-40-011
OGDR generated at CNES	ISZX02	LFPW	3-40-011

You will find more details on the BUFR format and the latest tables, on the WMO page:

<http://www.wmo.int/pages/prog/www/WMOCodes/OperationalCodes.html>

Finally, note that ECMWF offers a comprehensive introduction to understanding BUFR format and provides various well documented encoding/decoding tools. All this can be accessed on this page:

<http://www.ecmwf.int/products/data/software/bufr.html>.



## Annexe A - References

- Benada, J. R., 1997, "PO.DAAC Merged GDR (TOPEX/POSEIDON) Generation B User's Handbook", Version 2.0, JPL D-11007.
- Bonnefond, P., P. Exertier, O. Laurain, Y. Menard, A. Orsoni, E. Jeansou and G. Jan, 2002, "Absolute calibration of Jason-1 and TOPEX/POSEIDON altimeters in Corsica (abstract)", Jason-1/TOPEX/POSEIDON Science Working Team, New Orleans, LA, USA.
- Brenner, A. C., C. J. Koblinsky, and B. D. Beckley, 1990, A Preliminary Estimate of Geoid-Induced Variations in Repeat Orbit Satellite Altimeter Observations, *J. Geophys. Res.*, 95(c3), 3033-3040.
- Callahan, P. S., 1984, Ionospheric Variations affecting Altimeter Measurements: A brief synopsis *Marine Geodesy*, 8, 249-263.
- Cartwright, D. E. and R. J. Taylor, 1971, New computations of the tide-generating potential, *Geophys. J. R. Astr. Soc.*, 23, 45-74.
- Cartwright, D. E. and A. C. Edden, 1973, Corrected tables of tidal harmonics, *Geophys. J. R. Astr. Soc.*, 33, 253-264.
- Chambers et al., 1998, Reduction of geoid gradient error in ocean variability from satellite altimetry, *Marine Geodesy*, 21, 25-40.
- Chelton, D. B., J. C. Ries, B. J. Haines, L. L. Fu, and P. S. Callahan, 2001, "Satellite Altimetry", *Satellite Altimetry and Earth Sciences*, ed. L.L. Fu and A. Cazenave, pp. 1-131.
- Cruz Pol, S. L., C. S. Ruf, and S. J. Keihm, 1998, Improved 20-32 GHz atmospheric absorption model, *Radio Science*.
- Gaspar, P., F. Ogor, P. Y. Le Traon and O. Z. Zanife, 1994, Estimating the sea state of the TOPEX and POSEIDON altimeters from crossover differences, *J. Geophys. Res.*, 99, 24981-24994.
- Gaspar, P., F. Ogor and C. Escoubes, 1996, Nouvelles calibration et analyse du biais d'état de mer des altimètres TOPEX et POSEIDON, Technical note 96/018 of CNES Contract 95/1523.
- Haines, B., D. Kubitschek, G. Born and S. Gill, 2002, "Monitoring Jason-1 and TOPEX/POSEIDON from an offshore platform: The Harvest experiment (abstract)", Jason-1/TOPEX/POSEIDON Science Working Team, New Orleans, LA, USA.
- Imel, D., 1994, Evaluation of the TOPEX dual-frequency Ionosphere correction, *J. Geophys. Res.*, 99 (c12), pp 24895-24906.
- Keihm, S. J., M. A. Janssen, and C. S. Ruf, 1995, TOPEX/POSEIDON microwave radiometer (TMR): III. Wet troposphere range correction algorithm and pre-launch error budget, *IEEE Trans. Geosci. Remote Sensing*, 33, 147-161.
- Labroue S., P. Gaspar, J. Dorandeu, O.Z. Zanife, F. Mertz, P. Vincent and D. Choquet, 2004: Non parametric estimates of the sea state bias for the Jason-1 radar altimeter. *Marine Geodesy* 27 (3-4), 453-481.
- Le Provost, C., 2001, "Ocean Tides", *Satellite Altimetry and Earth Sciences*, ed. L.L. Fu and A. Cazenave, pp. 267-303.
- Le Provost, C., F. Lyard, M. L. Genco, F. Lyard, P. Vincent, and P. Canceil, 1995, Spectroscopy of the world ocean tides from a finite element hydrodynamic model, *J. Geophys. Res.*, 99, 24777-24797.
- Lefèvre F., F. Lyard, C. Le Provost and E.J.O Shrama, Fes99 : a global tide finite element solution assimilating tide gauge and altimetric information, *J. Atm. Oceano. Tech.*, submitted, 2001.
- Lemoine, F. G. et al., 1998, The Development of the joint NASA GSFC and NIMA Geopotential Model EGM96, NASA/TP-1998-206861, 575 pp.





- 
- Lillibridge J., Scharroo R. , Abdalla S. , and Vandemark D., 2013, One and Two-Dimensional Wind Speed Models for Ka-band Altimetry, JTECH-D-13-00167.1' [Journal of Atmospheric and Oceanic Technology, 2013].
- Pavlis, N. and R. H. Rapp, 1990, The development of an isostatic gravitational model to degree 360 and its use in global gravity modeling, *Geophys. J. Int.*, 100, 369-378.
- Rapp, R. H. et al., 1991, Consideration of Permanent Tidal Deformation in the Orbit Determination and Data Analysis for the TOPEX/POSEIDON Mission, NASA Tech. Memorandum 100775, Goddard Space Flight Center, Greenbelt, MD.
- Rapp, R. H., Y. M. Wang, and N. K. Pavlis, 1991, The Ohio State 1991 geopotential and Sea Surface Topography Harmonic Coefficient Models, Rpt. 410, Dept. of Geodetic Science and Surveying, The Ohio State University, Columbus, OH.
- Ray, R. D., 1999, A global ocean tide model from TOPEX/POSEIDON altimetry: GOT99.2, NASA Tech. Memorandum 1999-209478, Goddard Space Flight Center, Greenbelt, MD.
- Rio M.-H., F. Hernandez, 2004, A mean dynamic topography computed over the world ocean from altimetry, in situ measurements, and a geoid model, *J. Geophys. Res.*, 109, C12032.
- Rio, M.-H., Schaeffer, P., Lemoine, J.-M., Hernandez, F. (2005). "Estimation of the ocean Mean Dynamic Topography through the combination of altimetric data, in-situ measurements and GRACE geoid: From global to regional studies." Proceedings of the GOCINA international workshop, Luxembourg.
- Rodriguez, E., Y. Kim, and J. M. Martin, 1992, The effect of small-wave modulation on the electromagnetic bias, *J. Geophys. Res.*, 97(C2), 2379-2389.
- Ruf, C., S. Keihm, B. Subramanya, and M. Janssen, 1994, TOPEX/POSEIDON microwave radiometer performance and in-flight calibration, *J. Geophys. Res.*, 99, 24915-24926.
- Smith, W. H. F. and D. T. Sandwell, 1994, Bathymetric prediction from dense satellite altimetry and sparse shipboard bathymetry, *J. Geophys. Res.*, 99, 21803-21824.
- Stacey, F. D., 1977, *Physics of the Earth*, second ed. J. Wiley, 414 pp.
- Stammer, D., C. Wunsch, and R. M. Ponte, 2000, De-aliasing of global high frequency barotropic motions in altimeter observations, *Geophys. Res. Lett.*, 27, 1175-1178.
- Tapley, B. D. et al., 1994, Accuracy Assessment of the Large Scale Dynamic Ocean Topography from TOPEX/POSEIDON Altimetry, *J. Geophys. Res.*, 99 (C12), 24, 605-24, 618.
- Tierney, C., J. Wahr, F. Bryan, and V. Zlotnicki, 2000, Short-period oceanic circulation: implications for satellite altimetry, *Geophys. Res. Lett.*, 27, 1255-1258.
- Tournadre, J., and J. C. Morland, 1998, The effects of rain on TOPEX/POSEIDON altimeter data, *IEEE Trans. Geosci. Remote Sensing*, 35, 1117-1135.
- Watson, C., R. Coleman, N. White, J. Church and R. Govind, 2002, "In-situ calibration activities in Bass Strait, Australia (abstract)", Jason-1/TOPEX/POSEIDON Science Working Team, New Orleans, LA, USA.
- Witter, D. L., and D. B. Chelton, 1991, A Geosat altimeter wind speed algorithm and a method for altimeter wind speed algorithm development, *J. Geophys. Res.*, 96, 8853-8860.
- Wunsch, C., 1972, Bermuda sea level in relation to tides, weather and baroclinic fluctuations, *Rev. Geophys. Space Phys.*, 10, 1-49.
- Yi, Y., 1995, Determination of Gridded Mean Sea Surface from TOPEX, ERS-1 and GEOSAT Altimeter Data, Rpt. 434, Dept. of Geodetic Science and Surveying, The Ohio State University, Columbus, 9363-9368.
- Zlotnicki, V., 1994, Correlated environmental corrections in TOPEX/POSEIDON, with a note on ionospheric accuracy, *J. Geophys. Res.*, 99, 24907-24914.



## Annexe B - List of acronyms

AD	Applicable Document
AGC	Automatic Gain Control
AMR	Advanced Microwave Radiometer
AVISO	Archivage, Validation et Interprétation des données des Satellites Océanographiques
BRAT	Basic Radar Altimetry Toolbox
CLIVAR	Climate Variability and Predictability program
CLS	Collecte Localisation Satellites
CNES	Centre National d'Etudes Spatiales
DIODE	Détermination Immédiate d'Orbite par Doris Embarque
DORIS	Détermination d'Orbite et Radiopositionnement Intégrés par Satellite
DTM	Digital Terrain Model
ECMWF	European Center for Medium range Weather Forecasting
EGM	Earth Gravity Model
EM	ElectroMagnetic
EUMETSAT	European Organisation for the Exploitation of Meteorological Satellites
FES	Finite Element Solution
FFT	Fast Fourier Transform
GDR	Geophysical Data Records
GIM	Global Ionosphere Maps
GODAE	Global Ocean Data Assimilation Experiment
GPS	Global Positioning System
GTS	Global Telecommunications System
HF	High Frequency
IB	Inverse Barometer
IGDR	Interim Geophysical Data Records
JGM	Joint Gravity Model
JPL	Jet Propulsion Laboratory
LPT	Light Particle Telescope
MDT	Mean Dynamic Topography
MLE	Maximum Likelihood Estimator
MSS	Mean Sea Surface
NASA	National Aeronautics and Space Administration
NetCDF	Network Common Data Form
NOAA	National Oceanic and Atmospheric Administration
NRT	Near Real Time
NWP	Numerical Weather Prediction
OGDR	Operational Geophysical Data Records
OSTM	Ocean Surface Topography Mission
OSU	Ohio State University
POD	Precision Orbit Determination
POE	Precision Orbit Ephemerides
RD	Reference Document
RMS	Root Mean Square
RSS	Root Sum Square
SLA	Sea Level Anomaly
SLR	Satellite Laser Ranging
SSALTO	Segment Sol multimissions d'ALTimétrie, d'Orbitographie et de localisation précise
SSB	Sea State Bias
SSH	Sea Surface Height
SSHA	Sea Surface Height Anomaly
SWH	Significant Wave Height
T/P	Topex/Poseidon
TBC	To be confirmed



---

<b>TBD</b>	To be defined
<b>TEC</b>	Total Electron Content
<b>UTC</b>	Universal Time Coordinated
<b>WMO</b>	World Meteorological Organisation



## Annexe C - Contacts

### CNES

#### AVISO Altimetry

##### User Service Helpdesk:

8-10 rue Hermès  
F-31520 Ramonville StAgne, France

Fax : +33 (0) 561 393 782  
Web : [www.aviso.oceanobs.com](http://www.aviso.oceanobs.com)  
e-mail : [aviso@oceanobs.com](mailto:aviso@oceanobs.com) ([aviso@altimetry.fr](mailto:aviso@altimetry.fr) from Feb. 2014)

### EUMETSAT

Am Kavalleriesand 31  
D-64295 Darmstadt, Germany

Web : [www.eumetsat.int](http://www.eumetsat.int)

##### User Service Helpdesk:

Tel : +49 6151 807 366/377  
Fax : +49 6151 807 379  
e-mail : [ops@eumetsat.int](mailto:ops@eumetsat.int)

### ISRO

##### User Service Helpdesk:

TBD by ISRO